SCELAVI

Master Catalogue

SCELAVI

CONTENTS

CONTENIDOS

Discover Scelavi vinyl floors /
Descubre los suelos vinílicos Scelavi

06 Brand Philosophy / Filosofía de marca
08 Scelavi Advantages / Ventajas Scelavi
24 Product typology / Tipología de producto

06

Discover our collections /
Descubre nuestras colecciones

32 Cedar
44 Colorado
52 Kendra
67 Lotus
77 Lucid
100 Lupin
116 Maybach
130 Musk
150 Mustang
176 Panamera
184 Polaris
208 Polstar
218 Rio
224 Royce
242 Saturn
262 Splendor
270 Voss

30

Discover the care your floor needs /
Descubre los cuidados que necesita tu suelo

284 Coordinating trim / Molduras de coordinación
289 Maintenance / Mantenimiento
290 Installation guide / Guía de instalación
296 Warranty / Garantías

282

Created for your place to be

Get home. Take off your shoes and suddenly feel so comfortable and safe.

It's your time for enjoying your space, a space full of life where having the best time with your beloved ones. Sometimes you can relax, sometime you have to be so active but that's what a real home means. Scelavi was created for the real life, real spaces and real people. People looking for a quality product, easy to find, easy to install and especially easy to keep clean and perfect for a long, long time. We're here to offer our most beautiful designs and best quality products for your floors and walls, and help you to create the home you dreamed of. Scelavi, created for your place to be..

Llegar a casa, quitarse los zapatos y notar enseguida esa sensación de seguridad y comodidad absoluta.

Es tu momento para disfrutar de tu espacio, un espacio lleno de vida donde pasar el tiempo con tus seres queridos. A veces podrás relajarte, otras veces tocará estar en continuo movimiento, pero eso es un hogar de verdad. Scelavi fue creado para la vida real, para los espacios reales y personas reales. Personas que buscan un producto de calidad, fácil de conseguir, fácil de instalar y especialmente fácil de mantener limpio y que dure mucho, mucho tiempo. Estamos aquí para ofrecer nuestros mejores diseños y la más alta calidad para sus suelos y paredes, y ayudarte a crear el hogar con el que siempre has soñado.

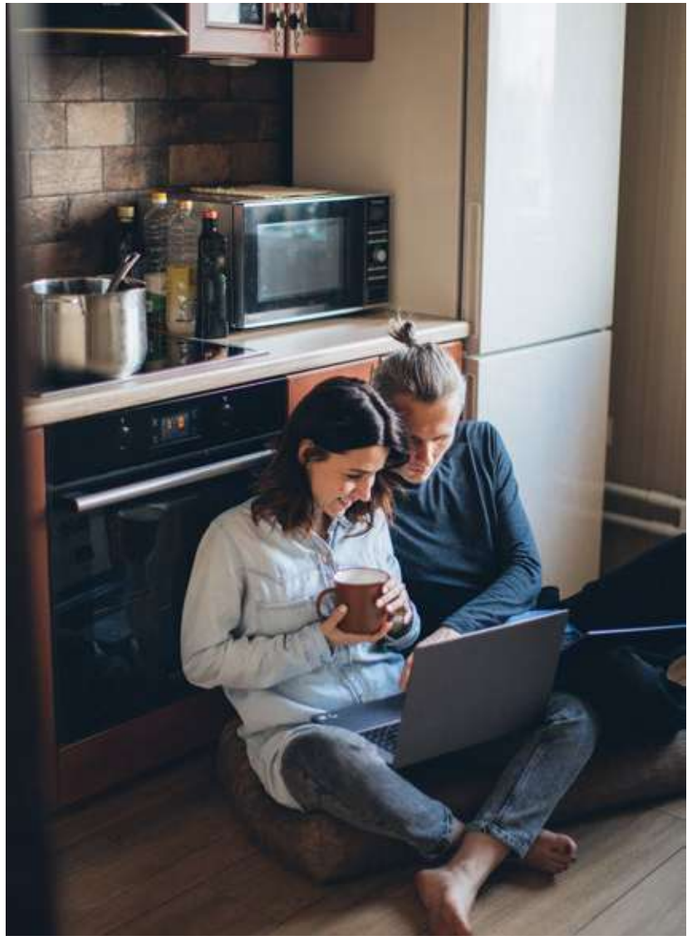

The cosy feeling of a warm flooring

La agradable sensación de un suelo cálido

Imagine waking up on a winter morning and place your bare feet down on a warm floor. This sensation is priceless. The features of our product make it capable of retaining the heat and offer you a warmer and cozy feeling to your entire home.

Imagina despertar en una mañana de invierno y poner tus pies descalzos sobre un suelo cálido. Esta sensación no tiene precio. Las características de nuestro producto lo hacen capaz de retener el calor y ofrecer una sensación agradable y acogedora en su hogar.

Suitable for underfloor heating

When applying our product on your floor it has an extra advantage that is the possibility to combine it with any kind of underfloor heating system for an even warmer result.
Maximum temperature for underfloor heating is 29° for SPC and VSV.

Apto para suelo radiante

El uso de Scelavi como pavimento tiene una ventaja extra sobre otros materiales y es que es compatible con cualquier tipo de sistema de calefacción de suelo radiante.
La temperatura máxima para suelo radiante es 29° para SPC y VSV.

Non-slip finish

Walking on Scelavi product is also safe for you and your family as its finishes offer very good slip resistance.

Acabado antideslizante

Caminar sobre nuestro producto es además muy seguro ya que nuestros acabados ofrecen altas propiedades antideslizantes.

We take care of the planet. Take care of you

Cuidamos el medio ambiente y te cuidamos a ti

Our dream was always to create a new eco-friendly surface alternative: a product that is not only beautiful, easy to install and easy to maintain but also a surface that's easy on environment. And we made it, as we can proudly confirm that Scelavi is produced only with virgin materials that have **low VOC emissions** and contribute to the improving of air quality.

We also take care of your safety as our products do not contain any harmful substances such as formaldehydes or heavy metals that can be toxic. In all our production process we use just alternative plasticizers that are used for example for toys production or food packaging.

Nuestro sueño siempre fue crear una alternativa ecológica de pavimento y revestimiento: un producto con un diseño espectacular, fácil de instalar, de mantener y cuidadoso con el medio ambiente. Y lo logramos, ya que podemos confirmar con orgullo que Scelavi se produce sólo con materiales vírgenes que tienen **bajas emisiones COV** y que por tanto contribuyen a mejorar la calidad del aire que respiramos.

También nos preocupamos por tu salud ya que nuestros productos no contienen ninguna sustancia nociva como formaldehídos o metales pesados que puedan llegar a ser tóxicos. En todo nuestro proceso de producción utilizamos sólo plastificantes alternativos que se utilizan por ejemplo para la producción de juguetes, dispositivos médicos o el envases para alimentos.

All our products comply with Flooscore, AgBB, A + (France) and M1 (Finland).
VOC emissions after 28 days
<100 µg / m^3.

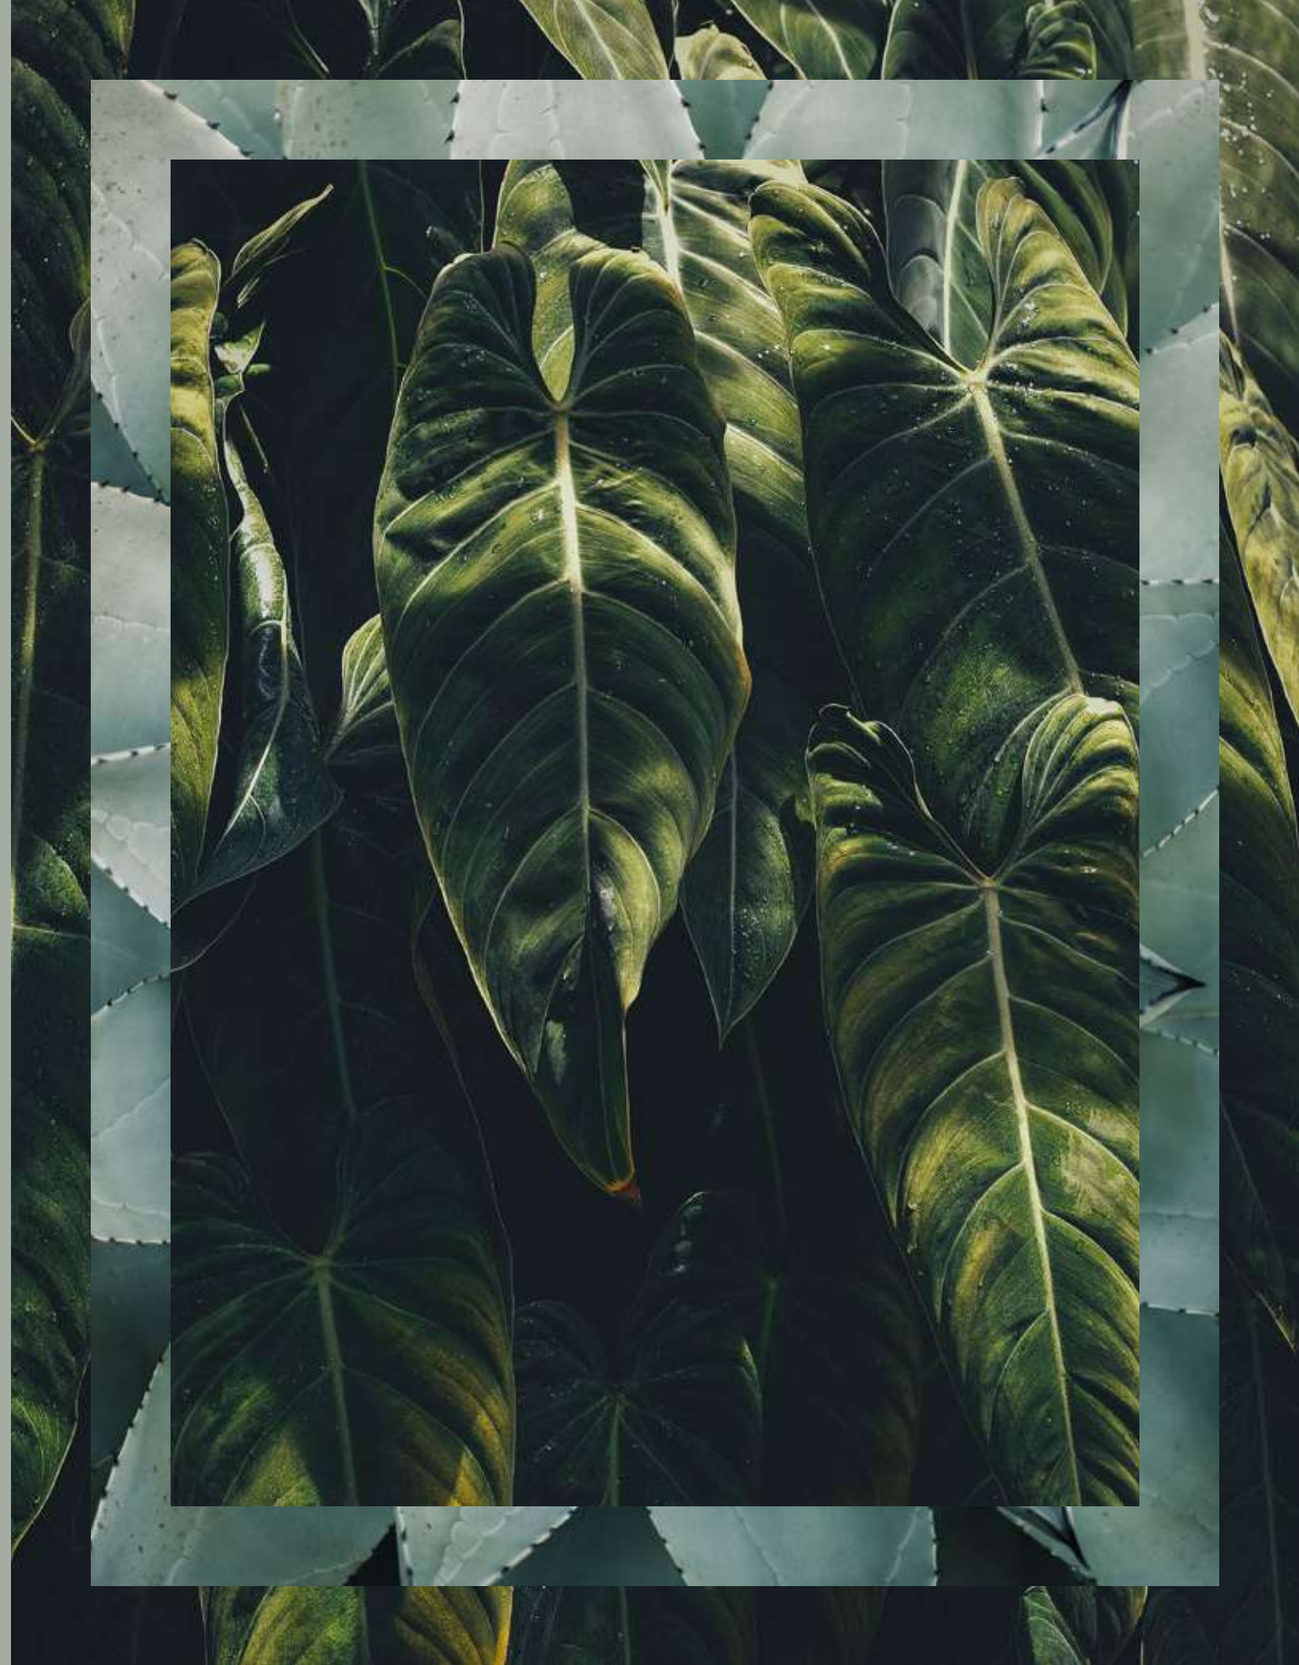

No worries about spilling liquids

Los derrames de cualquier líquido
no serán un problema

Every home is lively space, so humidity after a bath or spilling a glass of water on the kitchen floor, happens sometimes. But that's not a problem with Scelavi. All our products are made with special layers that make them waterproof, preventing the permeation of liquids like water, wine, juice, oil, etc. That's why our product is not only very beautiful for living rooms or bedrooms, but is also a perfect option for kitchens or bathrooms where this kind of situations occur the most.

Un hogar es un espacio vivo en el que se crea humedad en el baño después de ducharnos o se nos derrama un vaso de agua en la cocina a veces. Pero ese no será un problema con Scelavi. Todos nuestros productos están hechos con capas especiales que los hacen impermeables, evitando que los líquidos se filtren dentro del producto cuando se derrama agua, vino, zumo, aceite, etc. Por eso nuestro producto no sólo es muy bonito para salones o dormitorios, sino que también es una opción perfecta para cocinas o baños donde este tipo de situaciones se producen con mayor frecuencia.

Totally stain-proof

Resistente a las manchas

Other things that happen in our lively homes with kids and pets, is that sometimes surfaces get dirty and we panic thinking about stains that can't be removed. But you're not going to panic with Scelavi because our surfaces are treated with special coatings which make possible to easily clean avoiding any kind of stain or mark to remain on your floors and walls.

Otras cosas que suceden en nuestros hogares reales con niños y mascotas, es que a veces las superficies se ensucian y entramos en pánico pensando en que esas manchas no se vayan a quitar. Pero con Scelavi no te vas a asustar porque las capas superiores de nuestros productos están tratadas con revestimientos especiales que hace posible limpiar fácilmente la superficie evitando que cualquier tipo de mancha o marca permanezcan en tus suelos o en tus paredes.

Get the most realistic finish

Consigue el acabado más realista

NaturalFeel finish

Feel the touch of natural finish with Scelavi. More sustainable, more advantageous but maintaining the same organic look. Our entire range is treated with our NaturalFeel finish that mimics perfectly every vein, check and knot of our carefully designed woods or stones. You can see it, you can feel it.

Acabado NaturalFeel

Siente el toque del acabado natural de Scelavi. Una opción más sostenible y más ventajosa pero que se ve y se siente igual que la madera real. Todas nuestras series están tratadas con nuestro acabado NaturalFeel que imita perfectamente cada veta, cada grieta y cada nudo de nuestras maderas o piedras cuidadosamente diseñadas.

Sound absorbing for a relaxing home experience

Aislamiento acústico para encontrar paz en tu hogar

Sound absorbing

You'll also benefit of the strong acoustic insulation features of Scelavi. Our product is able to absorb sounds much better that other options and even with a better performance when including a pad layer in the bottom. This will help to reduce the noises when walking or dropping things on your flooring and also for walls acoustic insulation.

Fuerte aislamiento acústico

El producto Scelavi cuenta con una alta capacidad de asilamiento acústico. Nuestro producto es capaz de absorber los sonidos mucho mejor que otros materiales tanto en suelos como en paredes. Incluso se puede multiplicar su rendimiento si se le añade la capa inferior de aislamiento. Esto reducirá considerablemente los ruidos al caerse cosas o al caminar calzados.

High impact resistance

Also related to our product it's important to highlight the high resistance to impact. Our products reduce the possibility of getting traces or marks over your flooring after the impact that can happen along the years.

Alta resistencia al impacto

También relacionado con nuestro producto, es importante resaltar la alta resistencia al impacto. Nuestros productos reducen la posibilidad de dejar rastros o marcas sobre su suelo después del impacto que puede ocurrir a lo largo de los años.

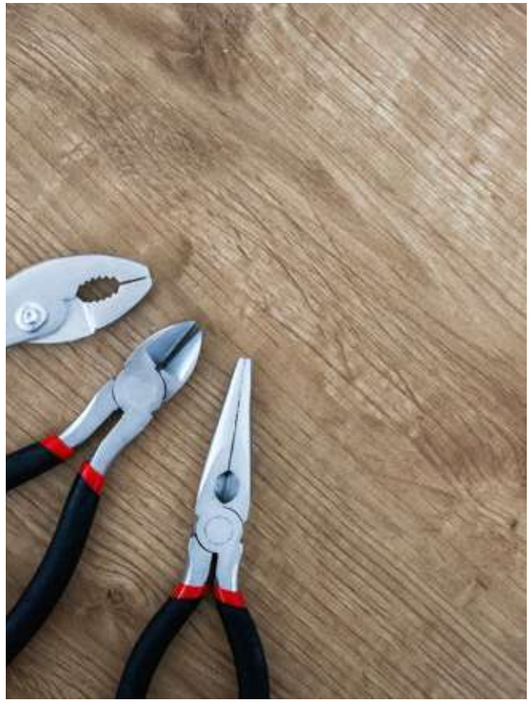

Easy maintenance

All the superior advantages of the product it makes Scelavi with the perfect easy maintenance option. It's easy to clean, waterproof, has a high resistance to stains and to installor to replace any plank or change the complete floor it's a DIY task as will be very easy to do it by yourself.

Fácil mantenimiento

Todas las ventajas del producto hacen que Scelavi sea una perfecta opción de fácil mantenimiento. Es fácil de limpiar, impermeable, tiene una alta resistencia a las manchas y cuando se necesita reemplazar alguna pieza o cambiar el pavimento completo es una tarea DIY, ya que será muy fácil y rápido realizarlo por ti mismo.

Bio-Block

With our Bio-Block tecnology the flooring will be safer for your family. This technology is based on an innovative liquid that, mixed with the upper layers of Scelavi product, creates a strong antibacterial protection that kills 99% of the bacteria when get in contact with the floor.

Con nuestra tecnología Bio-Block, contará con el pavimento más seguro para su familia. Esta tecnología se basa en una solución innovadora que, mezclado con las capas superiores del producto Scelavi, crea una fuerte protección antibacteriana que mata el 99% de las bacterias que entran en contacto con el suelo.

Diamond Protect

We have developed a highly scratch resistant system for household pets such as cats and dogs. It will also resist small accidents that could damage the floor with scratches such as dragging furniture.

Pet-friendly

A well-chosen floor will save pet owners a lot of headaches: deep scratches on the floor, stains and difficult maintenance. Our product has our advanced anti-scratch, anti-stain and waterproof protection.

Diamond Protect

Hemos desarrollado un sistema altamente resistente a los arañazos para mascotas del hogar como perros y gatos. También resistirá a los pequeños accidentes que podrían dañar el suelo con rasguños como por ejemplo al arrastrar muebles.

Pet-friendly

Elegir el pavimento correcto va a evitarle muchos dolores de cabeza a todos los que tenéis mascotas: arañazos profundos en el suelo, manchas y un mantenimiento difícil. Nuestro producto tiene nuestra avanzada protección anti-arañazos, anti-manchas e impermeable.

Your pets also deserve to enjoy these floors

Tus mascotas también se merecen disfrutar de estos suelos

SPC

Sintered Core

Least expansion and contraction

Our products include the most advanced sintered stone core that make it to expand and contract less than other options

Better performance in extreme temperatures

SPC has a more dense core so it performs better in spaces with very high and very low temperatures.

Menor expansión y contracción

Nuestros productos incluyen el núcleo de piedra sinterizada más avanzada que permite que el material se expanda y se contraiga menos que otras opciones.

Mejor rendimiento ante temperatura extremas

El SPC tiene un interior más denso que otros productos y la convierte en una buena opción para lugares con temperaturas muy frías o muy calientes.

Strong sintered stone core SPC (Stone Plastic Composite) with click installation system.

Núcleo resistente de piedra sinterizada SPC (Stone Plastic Composite) y sistema de instalación con clic.

Realistic design finish with protection layers to preserve colour and texture, including UV protection.

Diseño de acabado muy realista con capas protectoras que mantienen el buenas condiciones el color y la textura protegiéndolo incluso de los rayos UV.

IXPE foam pad embosses or plain, for a better sound insulation and absorption that provides cuchion capability.

Almohadilla de espuma IXPE con relieve o plana,para una buena absorción y aislamiento acústico y proporciona capacidad de amortiguación.

ESPC

Engineered SPC

Barefoot comfort

Walking with nothing on your feet and steel feel comfy is possible with ESPC (Engineered Stone Plastic Composite).

Luxury look

The ESPC (Engineered Stone Plastic Composite) composition gives to your floor and walls a true luxury look.

Warmer feeling

Our ESPC (Engineered Stone Plastic Composite) offers a truly warm feeling to your spaces also thanks to its soft finish.

Comfort descalzo

Disfruta con ESPC (Engineered Stone Plastic Composite) de la comodidad de caminar descalzo por tu hogar.

Aspecto premium

La composición de materiales de ESPC (Engineered Stone Plastic Composite) ofrece a tus suelos y paredes un aspecto realmente premium.

Sensación cálida

Nuestro producto ESPC (Engineered Stone Plastic Composite) ofrece una sensación realmente cálida gracias a su acabado suave y agradable.

Realistic design finish with protection layers to preserve colour and texture, including UV protection.

Diseño de acabado muy realista con capas protectoras que mantienen el buenas condiciones el color y la textura protegiéndolo incluso de los rayos UV.

Strong ESPC Core with click installation system.

Núcleo resistente de ESPC y sistema de instalación con clic.

LVT body. The ESPC product includes two LVT layers, one of them at the top and other at the bottom creating a very premium product.

LVT. El producto ESPC incuye dos capas de LVT una en la parte superior y otra en la parte inferior conviertiéndolo en un producto premium. .

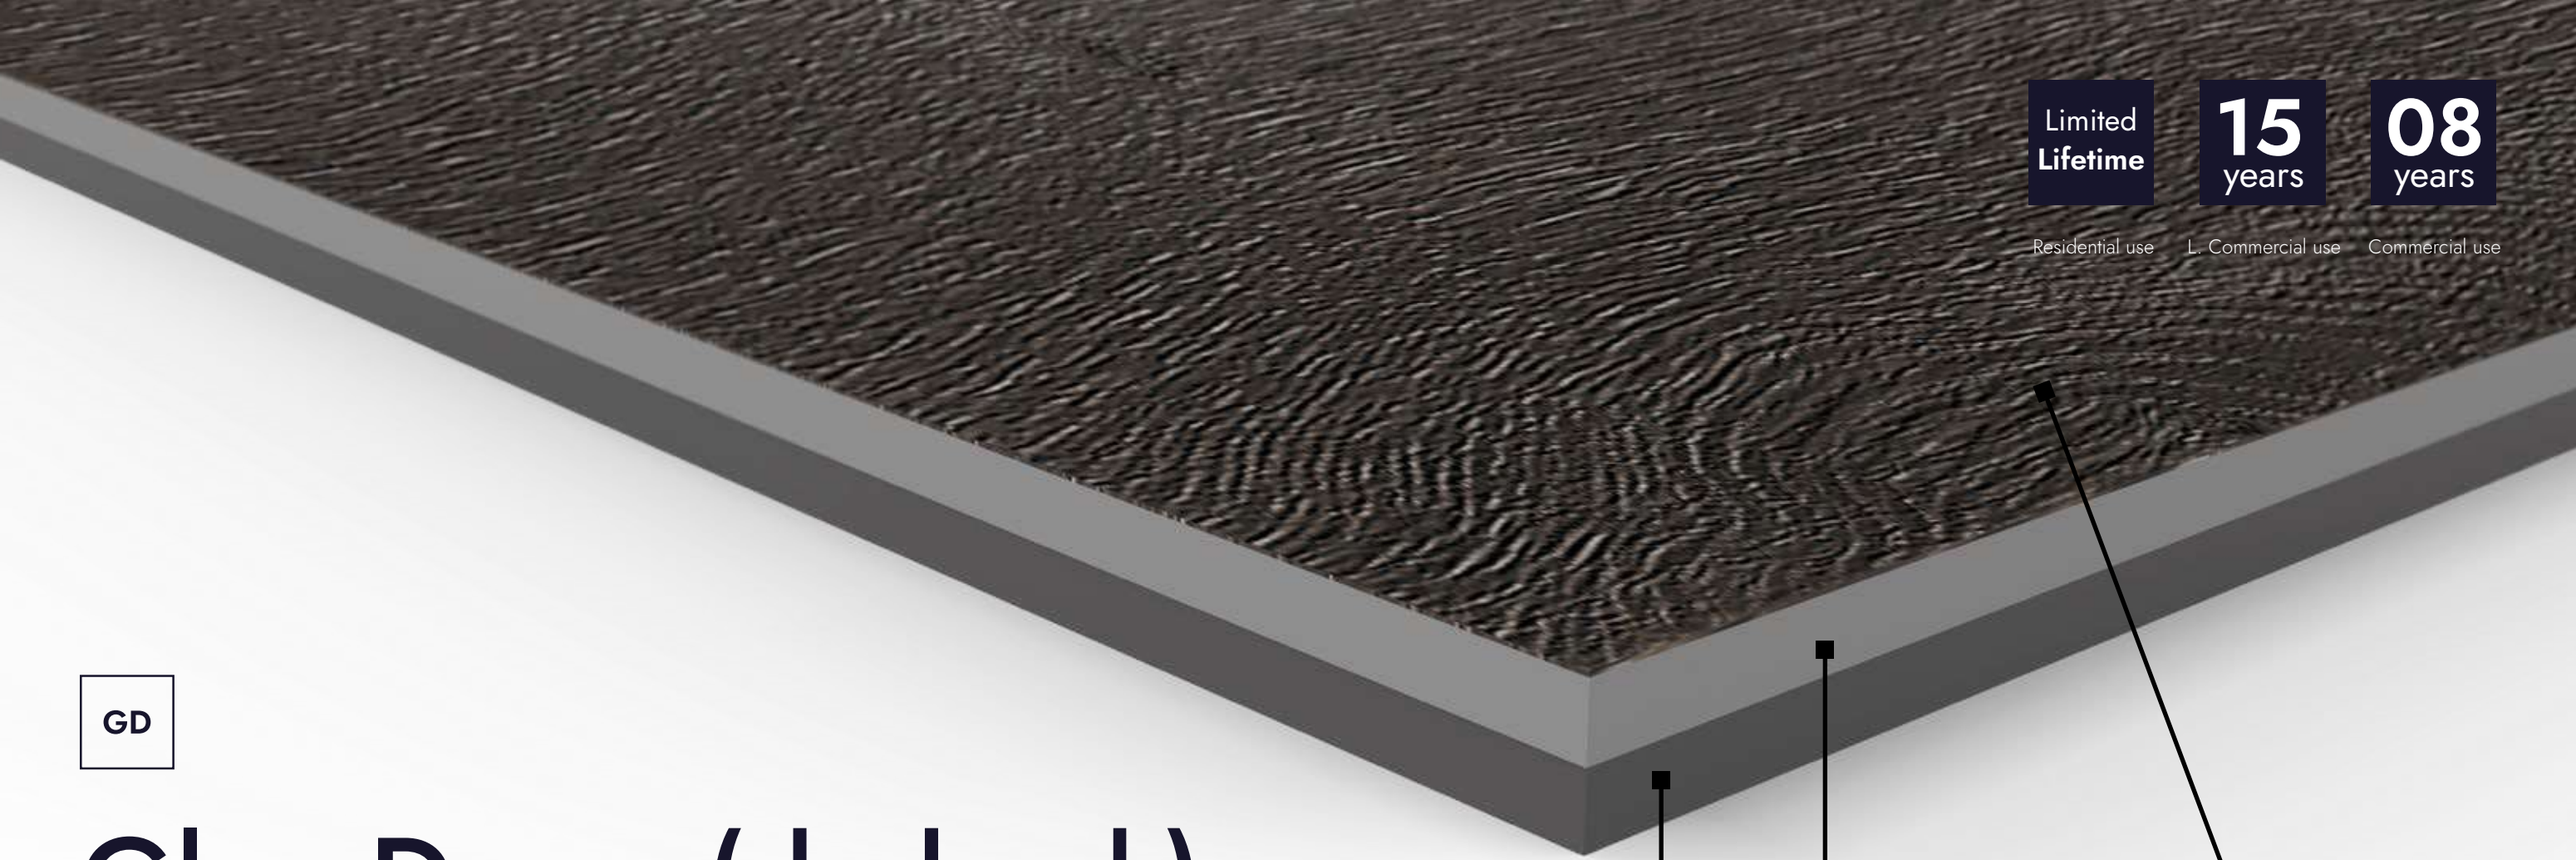

Limited **Lifetime**

Residential use

15 years

L. Commercial use

08 years

Commercial use

GD

Glue Down (dryback)

Non floating floor

Our product is the best glued vinyl system installation.

Economical than click

For a Glue Down (dryback) system installation there's no needed a special underlayer as the glue will be a good barrier.

Flexible and warm

Our Glue Down (dryback) product is also flexible as our Loose Lay option and offers a really warm feeling.

Suelo no flotante

Nuestro Glue Down (dryback) es el mejor sistema de instalación con adhesivo del mercado.

Más barato que el clic

Los productos Glue Down (dryback) no necesitan incluir una malla o barrera sobre el suelo antes de instalarse.

Flexible y cálido

Nuestro producto Glue Down (dryback) es muy flexible al igual que nuestra opción Loose Lay u también ofrece una sensación realmente cálida.

Pressure layer

Capa de presión

Middle layer for Glue Down (dryback) system that provides acoustic insulation and waterproof properties.

Capa central preparada para los sistemas Glue Down (dryback), que aportan aislamiento acústico e impermeabilidad.

Realistic design finish with protection layers to preserve colour and texture, including UV protection.

Diseño de acabado muy realista con capas protectoras que mantienen el buenas condiciones el color y la textura protegiéndolo incluso de los rayos UV.

Come and choose your new surface

Ven y elige tu nuevo revestimiento

CEDAR

It is an excellent choice if you want a long-lasting product offering exceptional value for money.

NaturalFeel finish

Body Type:

SPC The stone core option.

ESPC Our most resistant system.

GD Ultimate glue application.

Faces: 4 per colour
Thickness: 4,5 mm (SPC), 5 mm (ESPC)
Wear layer: 0.55 mm
PAD typology: 1,5 mm IXPE PAD (SPC, ESPC)
Total Thickness: 6 mm (SPC), 6,5 mm (ESPC), 2,5mm y 3 mm (GLUE DOWN)

Ivory

White

Oak

Peanut

CEDAR

Peanut

CEDAR Peanut 23x152 cm · 9"x60"

CEDAR
White

CEDAR White 23x152 cm · 9"x60"

CEDAR Ivory 23x152 cm · 9"x60"

CEDAR

Ivory

CEDAR

Oak

CEDAR Oak 23x152 cm - 9"x60"

CEDAR

SPC | ESPC | GD

Size: 23x152 cm · 9"x60"
Faces: 4 per colour
Thickness: 4,5 mm (SPC), 5 mm (ESPC)
Wear layer: 0.55 mm
PAD typology: 1,5 mm IXPE PAD (SPC, ESPC)
Total Thickness: 6 mm (SPC), 6,5 mm (ESPC), 2,5mm y 3 mm (GLUE DOWN)

* Available designs per each colour.
* Despiece caras disponibles por color.

	SPC	ESPC	Glue Down	
Thickness	6mm	6,5mm	2,5mm	3mm
SQM/Box	2,103	2,103	4,2	3,86
Weight/Box	21kg	21kg	21kg	22,5kg
Pcs/Box	6	6	12	11
Box/ Pallet	60	60	60	56
Plt/Container	21	21	21	21

COLORADO

A unique, durable and stylish collection, with each plank telling a story.

NaturalFeel finish

Body Type:

SPC The stone core option.

ESPC Our most resistant system.

GD Ultimate glue application.

Faces: 4 per colour
Thickness: 4,5 mm (SPC), 5 mm (ESPC)
Wear layer: 0.55 mm
PAD typology: 1,5 mm IXPE PAD (SPC, ESPC)
Total Thickness: 6 mm (SPC), 6,5 mm (ESPC), 2,5mm y 3 mm (GLUE DOWN)

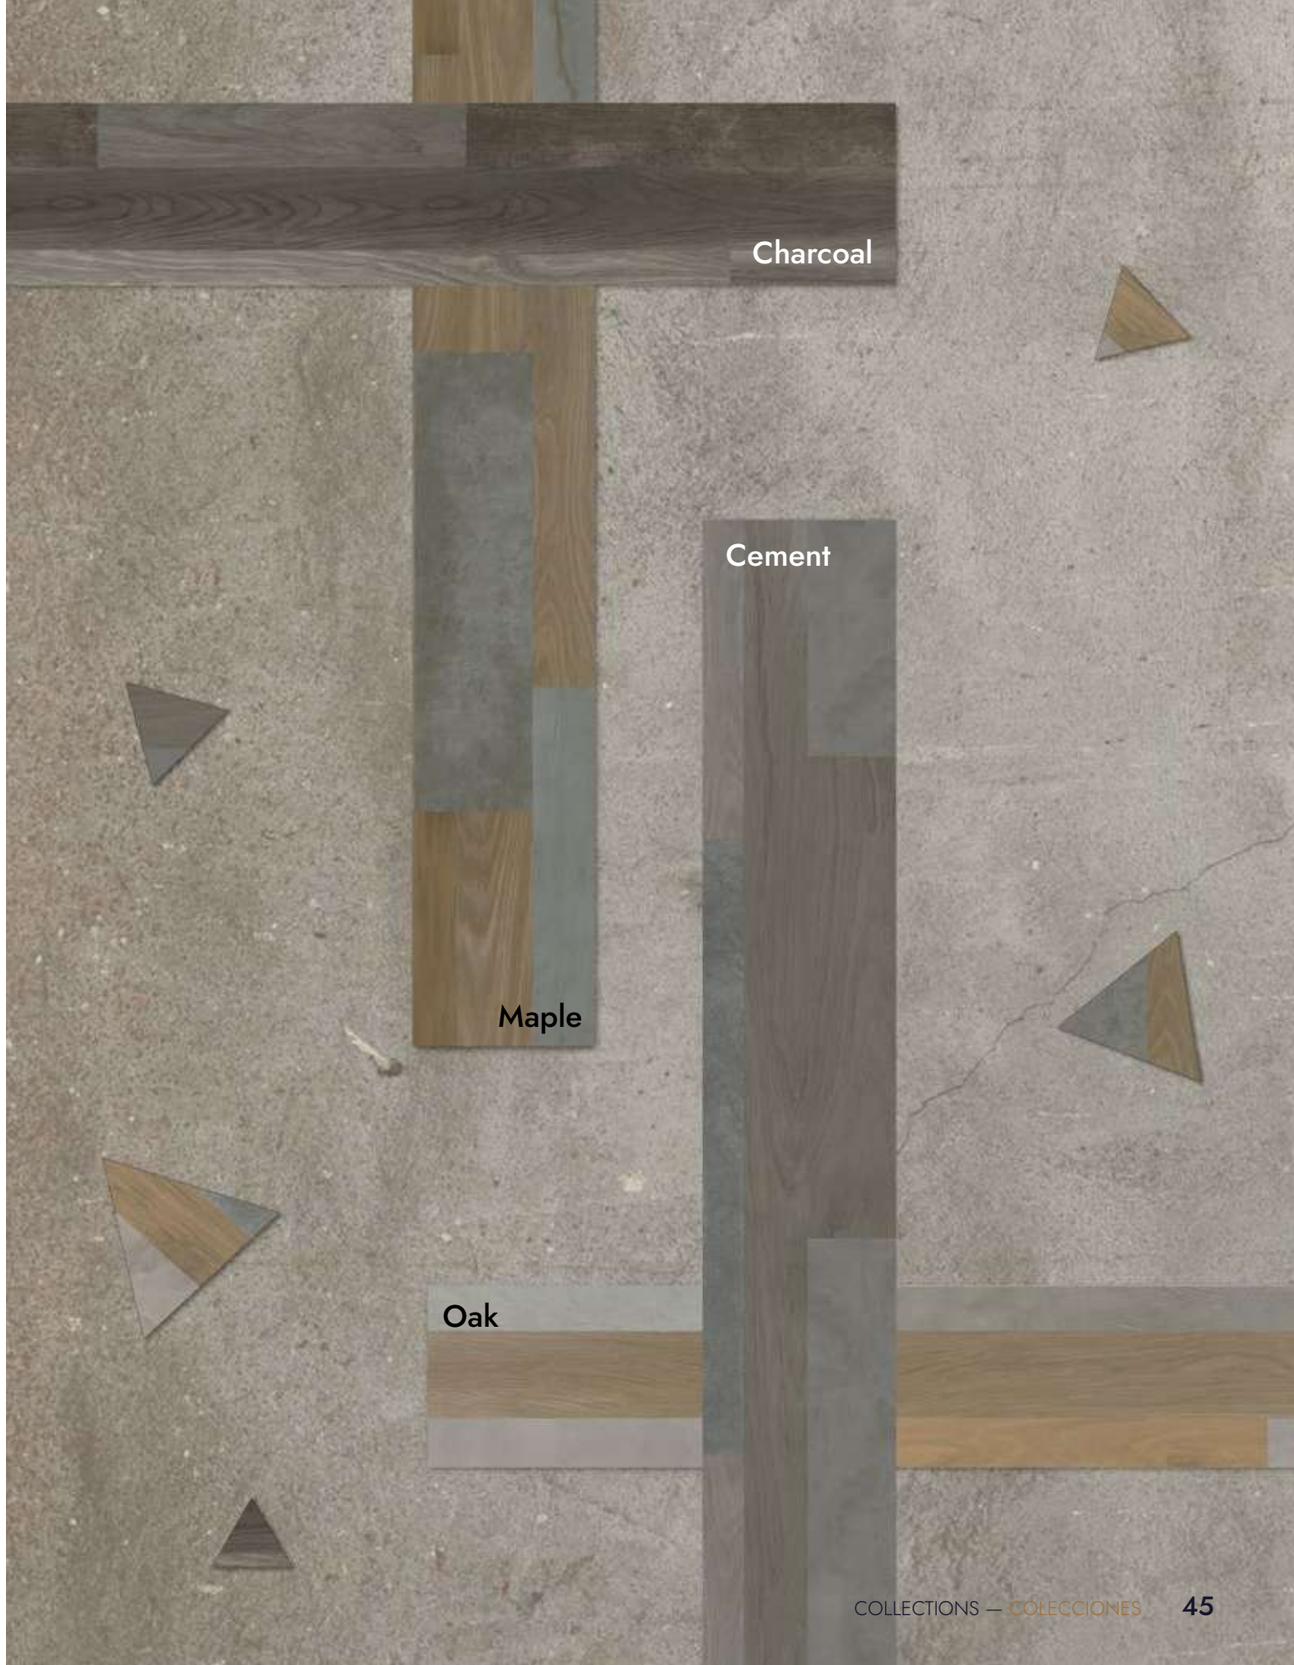

COLORADO

Charcoal

COLORADO Charcoal 23x152 cm · 9"x60"

COLORADO Oak 23x152 cm · 9"x60"

COLORADO

Oak

COLORADO

SPC | ESPC | GD

Size: 23x152 cm · 9"x60"
Faces: 4 per colour
Thickness: 4,5 mm (SPC), 5 mm (ESPC)
Wear layer: 0.55 mm
PAD typology: 1,5 mm IXPE PAD (SPC, ESPC)
Total Thickness: 6 mm (SPC), 6,5 mm (ESPC), 2,5mm y 3 mm (GLUE DOWN)

* Available designs per each colour.
* Despiece caras disponibles por color.

	SPC	ESPC	Glue Down	
Thickness	6mm	6,5mm	2,5mm	3mm
SQM/Box	2,103	2,103	4,2	3,86
Weight/Box	21kg	21kg	21kg	22,5kg
Pcs/Box	6	6	12	11
Box/ Pallet	60	60	60	56
Plt/Container	21	21	21	21

COLORADO Maple

COLORADO Cement

COLORADO Oak

COLORADO Charcoal

KENDRA

Its timeless appeal makes it suitable for any setting too, from commercial to residential.

NaturalFeel finish

Body Type:

SPC The stone core option.

ESPC Our most resistant system.

GD Ultimate glue application.

Faces: 4 per colour
Thickness: 3.5 mm, 4.0 mm, 5.0 mm
Wear layer: 0.3 mm
PAD typology: 1.0 mm IXPE PAD
Total Thickness: 4.5 mm, 5.0 mm, 6.0 mm

Mokka
Grey
Beige
Soya
Roble

KENDRA
Mokka

KENDRA Mokka 18x152 cm · 7"x61"

KENDRA *Grey 18x152 cm · 7"x61"*

KENDRA

Grey

KENDRA

Soya

KENDRA Soya 18x152 cm · 7"x61"

KENDRA Roble 18x152 cm · 7"x61"

KENDRA

Roble

KENDRA

Beige

KENDRA Begie 18x152 cm · 7"x61"

KENDRA

SPC ESPC GD

Size: 18x152 cm · 7"x61"
Faces: 54 per colour
Thickness: 3.5 mm, 4.0 mm, 5.0 mm
Wear layer: 0.3 mm
PAD typology:1.0 mm IXPE PAD
Total Thickness: 4.5 mm, 5.0 mm, 6.0 mm

* Available designs per each colour.
* Despiece caras disponibles por color.

	SPC	ESPC	Glue Down	
Thickness	6mm	6,5mm	2,5mm	3mm
SQM/Box	2,103	2,103	4,2	3,86
Weight/Box	21kg	21kg	21kg	22,5kg
Pcs/Box	6	6	12	11
Box/ Pallet	60	60	60	56
Plt/Container	21	21	21	21

KENDRA Soya

KENDRA Roble

KENDRA Mokka

LOTUS

Its timeless appeal makes it suitable for any setting too, from commercial to residential.

NaturalFeel finish

Body Type:

SPC The stone core option.

ESPC Our most resistant system.

GD Ultimate glue application.

Faces: 4 per colour
Thickness: 4,5 mm (SPC), 5 mm (ESPC)
Wear layer: 0.55 mm
PAD typology: 1,5 mm IXPE PAD (SPC, ESPC)
Total Thickness: 6 mm (SPC), 6,5 mm (ESPC), 2,5mm y 3 mm (GLUE DOWN)

Crema

Caramel

Brown

Rusteze

Ivory

LOTUS

Brown

LOTUS Brown 23x152 cm · 9″x60″

LOTUS

Brown

LOTUS Brown 23x152 cm · 9"x60"

LOTUS Caramel 23x152 cm · 9"x60"

LOTUS

SPC | ESPC | GD

Size: 23x152 cm · 9"x60"
Faces: 4 per colour
Thickness: 4,5 mm (SPC), 5 mm (ESPC)
Wear layer: 0.55 mm
PAD typology: 1,5 mm IXPE PAD (SPC, ESPC)
Total Thickness: 6 mm (SPC), 6,5 mm (ESPC), 2,5mm y 3 mm (GLUE DOWN)

* Available designs per each colour.
* Despiece caras disponibles por color.

	SPC	ESPC	Glue Down	
Thickness	6mm	6,5mm	2,5mm	3mm
SQM/Box	2,103	2,103	4,2	3,86
Weight/Box	21kg	21kg	21kg	22,5kg
Pcs/Box	6	6	12	11
Box/ Pallet	60	60	60	56
Plt/Container	21	21	21	21

LOTUS Crema

LOTUS Ivory

LOTUS Rusteze

LOTUS Caramel

LOTUS Brown

LUCID

Available in multiple colours, this range is ideal if you are looking for an unobtrusive and classy flooring.

NaturalFeel finish

Body Type:

SPC The stone core option.

ESPC Our most resistant system.

GD Ultimate glue application.

Faces: 4 per colour
Thickness: 4,5 mm (SPC), 5 mm (ESPC)
Wear layer: 0.55 mm
PAD typology: 1,5 mm IXPE PAD (SPC, ESPC)
Total Thickness: 6 mm (SPC), 6,5 mm (ESPC), 2,5mm y 3 mm (GLUE DOWN)

LUCID

White

LUCID White 23x152 cm · 9″x60″

LUCID

White

LUCID White 23x152 cm · 9"x60"

LUCID

Oak

LUCID Oak 23x152 cm · 9"x60"

LUCID

Ivory

LUCID Ivory 23x152 cm · 9"x60"

LUCID Nuez 23x152 cm · 9"x60"

LUCID
Nuez

LUCID

Beige

LUCID Beige 23x152 cm · 9"x60"

LUCID

Fumed Grey

LUCID Fumed GRey 23x152 cm · 9"x60"

LUCID

Roble

LUCID Roble 23x152 cm · 9"x60"

LUCID Smoke Grey 23x152 cm · 9"x60"

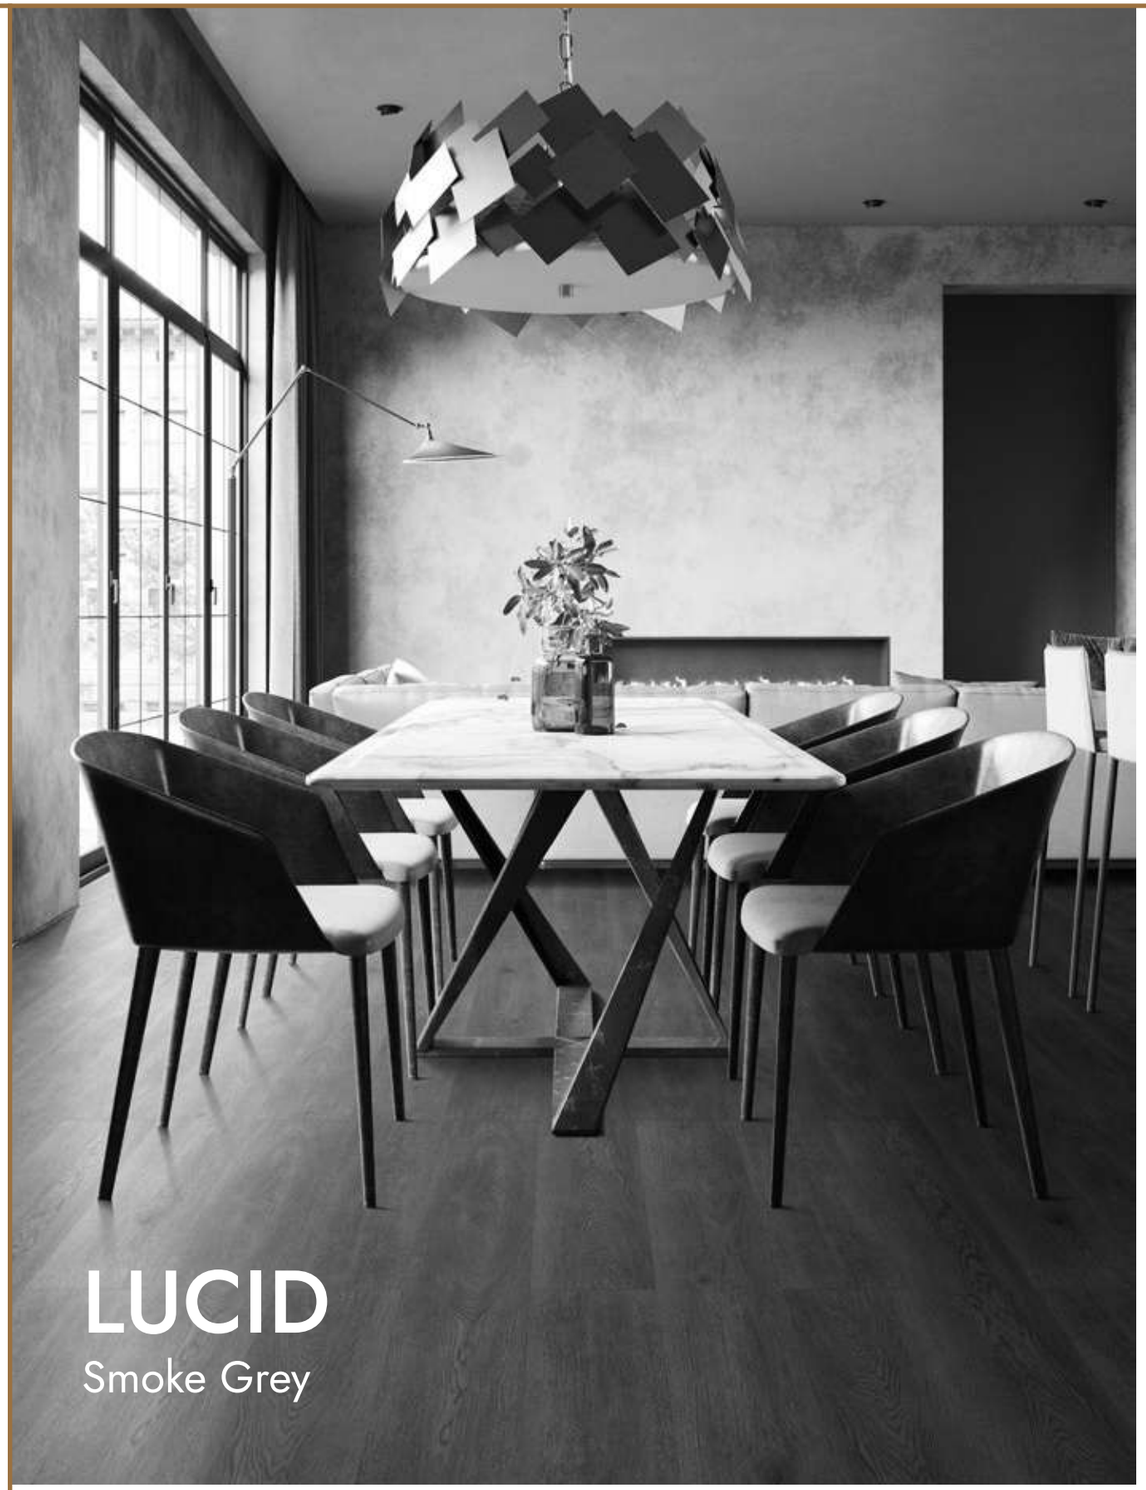

LUCID
Smoke Grey

LUCID

Brown

LUCID Brown 23x152 cm · 9"x60"

LUCID

SPC | ESPC | GD

Size: 23x152 cm · 9"x60"
Faces: 4 per colour
Thickness: 4,5 mm (SPC), 5 mm (ESPC)
Wear layer: 0.55 mm
PAD typology: 1,5 mm IXPE PAD (SPC, ESPC)
Total Thickness: 6 mm (SPC), 6,5 mm (ESPC), 2,5mm y 3 mm (GLUE DOWN)

* Available designs per each colour.
* Despiece caras disponibles por color.

	SPC	ESPC	Glue Down	
Thickness	6mm	6,5mm	2,5mm	3mm
SQM/Box	2,103	2,103	4,2	3,86
Weight/Box	21kg	21kg	21kg	22,5kg
Pcs/Box	6	6	12	11
Box/ Pallet	60	60	60	56
Plt/Container	21	21	21	21

LUCID Ivory

LUCID Fumed grey

LUCID Oak

LUCID Nuez

LUCID White

LUCID Beige

LUCID Roble

LUCID Brown

LUCID Smoke grey

LUPIN

This flooring collection adds personality and atmosphere to any interior setting.

NaturalFeel finish

Body Type:

SPC The stone core option.

ESPC Our most resistant system.

GD Ultimate glue application.



Faces: 4 per colour
Thickness: 3.5 mm, 4.0 mm, 5.0 mm
Wear layer: 0.3 mm
PAD typology: 1.0 mm IXPE PAD
Total Thickness: 4.5 mm, 5.0 mm, 6.0 mm

LUPIN Greige 18x152 cm · 7"x61"

LUPIN

Greige

LUPIN

Natural

LUPIN Natural 18x152 cm · 7"x61"

LUPIN Wengue 18x152 cm · 7"x61"

LUPIN

Wengue

LUPIN

Silver

LUPIN Silver 18x152 cm · 7"x61"

LUPIN Beige 18x152 cm · 7”x61”

LUPIN

Beige

LUPIN

Ivory

LUPIN Ivory 18x152 cm · 7"x61"

LUPIN

SPC ESPC GD

Size: 18x152 cm · 7"x61"
Faces: 4 per colour
Thickness: 3.5 mm, 4.0 mm, 5.0 mm
Wear layer: 0.3 mm
PAD typology: 1.0 mm IXPE PAD
Total Thickness: 4.5 mm, 5.0 mm, 6.0 mm

* Available designs per each colour.
* Despiece caras disponibles por color.

	SPC	ESPC	Glue Down	
Thickness	6mm	6,5mm	2,5mm	3mm
SQM/Box	2,103	2,103	4,2	3,86
Weight/Box	21kg	21kg	21kg	22,5kg
Pcs/Box	6	6	12	11
Box/ Pallet	60	60	60	56
Plt/Container	21	21	21	21

LUPIN Ivory

LUPIN Silver

LUPIN Natural

LUPIN Beige

LUPIN Greige

LUPIN Wengue

MAYBACH

Maybach brings warmth and natural feeling to interior spaces, allowing occupants to unwind and enjoy the ambience.

NaturalFeel finish

Body Type:

SPC The stone core option.

ESPC Our most resistant system.

GD Ultimate glue application.

Faces: 4 per colour
Thickness: 4,5 mm (SPC), 5 mm (ESPC)
Wear layer: 0.55 mm
PAD typology: 1,5 mm IXPE PAD (SPC, ESPC)
Total Thickness: 6 mm (SPC), 6,5 mm (ESPC), 2,5mm y 3 mm (GLUE DOWN)

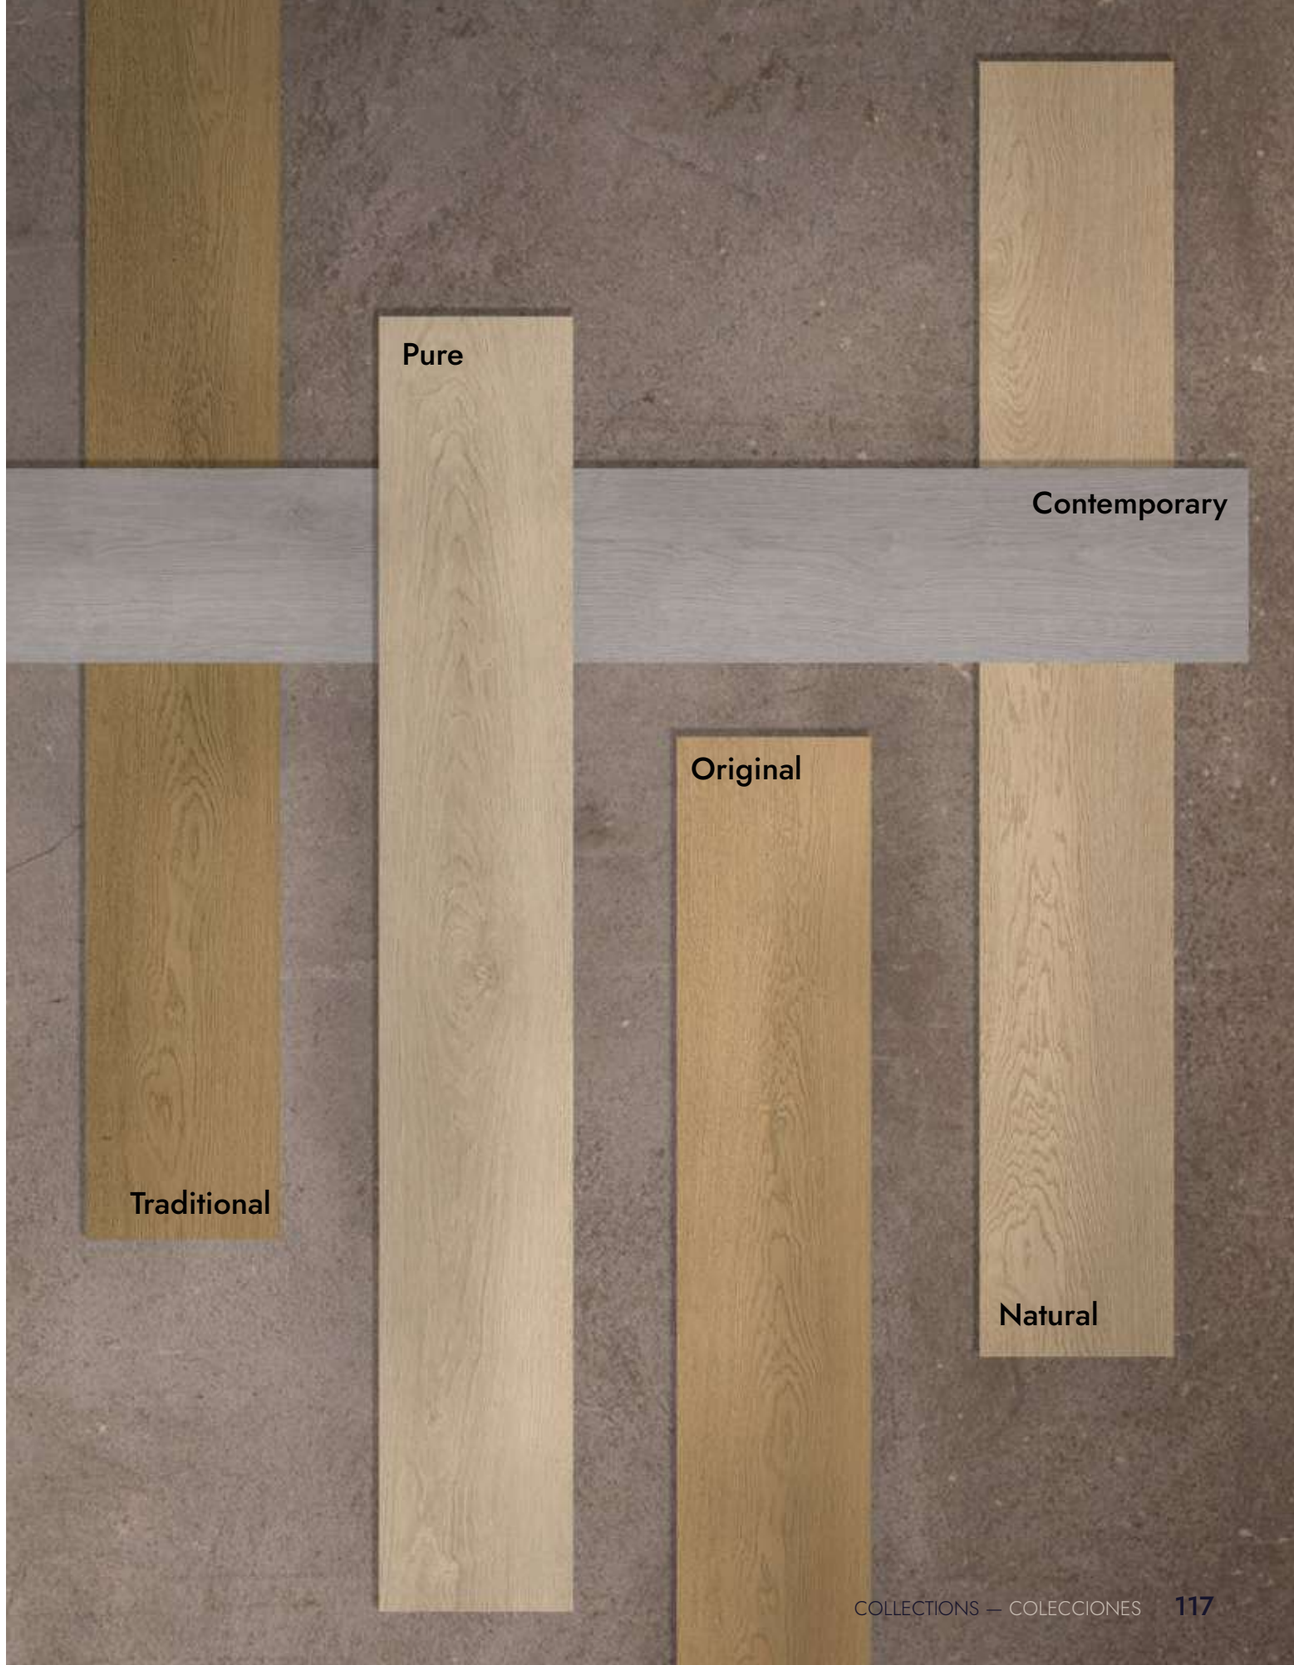

MAYBACH

Natural

MAYBACH Natural 23x152 cm · 9"x60"

MAYBACH

Contemporary

MAYBACH Contemporary 23x152 cm . 9"x60"

MAYBACH

Pure

MAYBACH Pure 23x152 cm · 9"x60"

MAYBACH

Traditional

MAYBACH Traditional 23x152 cm · 9"x60"

MAYBACH

Original

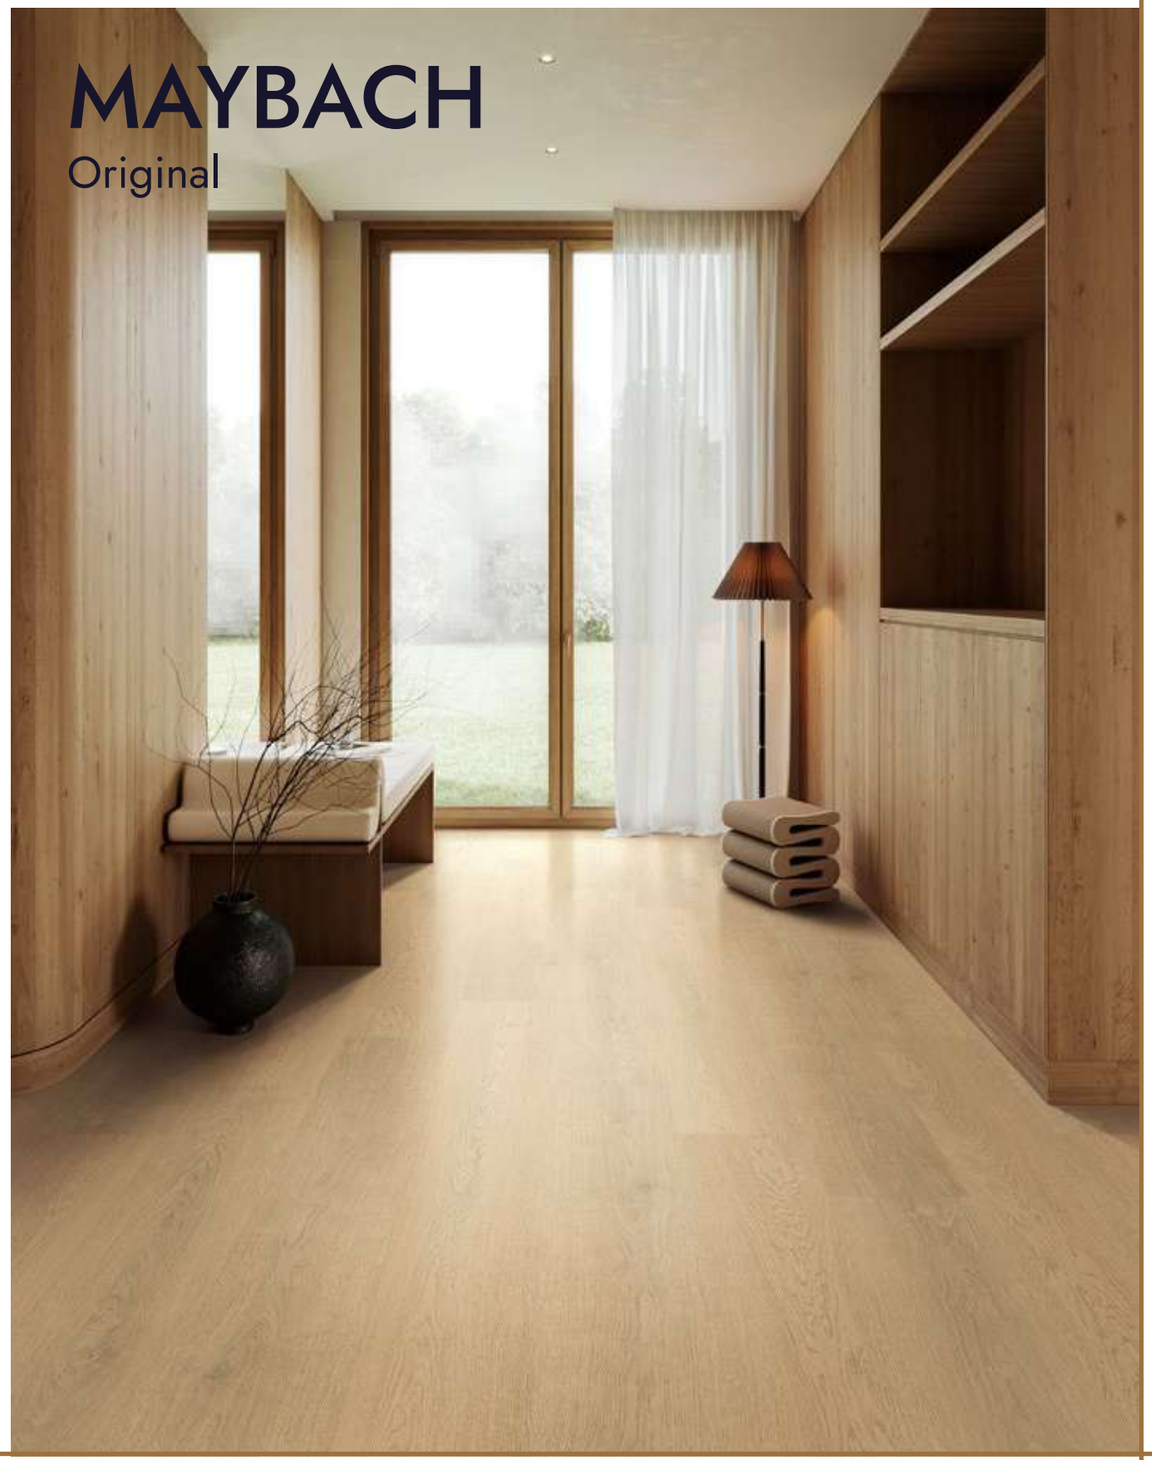

MAYBACH Original 23x152 cm · 9"x60"

MAYBACH

SPC ESPC GD

Size: 23x152 cm · 9"x60"
Faces: 4 per colour
Thickness: 4,5 mm (SPC), 5 mm (ESPC)
Wear layer: 0.55 mm
PAD typology: 1,5 mm IXPE PAD (SPC, ESPC)
Total Thickness: 6 mm (SPC), 6,5 mm (ESPC), 2,5mm y 3 mm (GLUE DOWN)

* Available designs per each colour.
* Despiece caras disponibles por color.

	SPC	ESPC	Glue Down	
Thickness	6mm	6,5mm	2,5mm	3mm
SQM/Box	2,103	2,103	4,2	3,86
Weight/Box	21kg	21kg	21kg	22,5kg
Pcs/Box	6	6	12	11
Box/ Pallet	60	60	60	56
Plt/Container	21	21	21	21

MUSK

Musk brings warmth and natural feeling to interior spaces, allowing occupants to unwind and enjoy the ambience.

NaturalFeel finish

Body Type:

SPC The stone core option.

ESPC Our most resistant system.

GD Ultimate glue application.

Faces: 4 per colour
Thickness: 3.5 mm, 4.0 mm, 5.0 mm
Wear layer: 0.3 mm
PAD typology: 1.0 mm IXPE PAD
Total Thickness: 4.5 mm, 5.0 mm, 6.0 mm

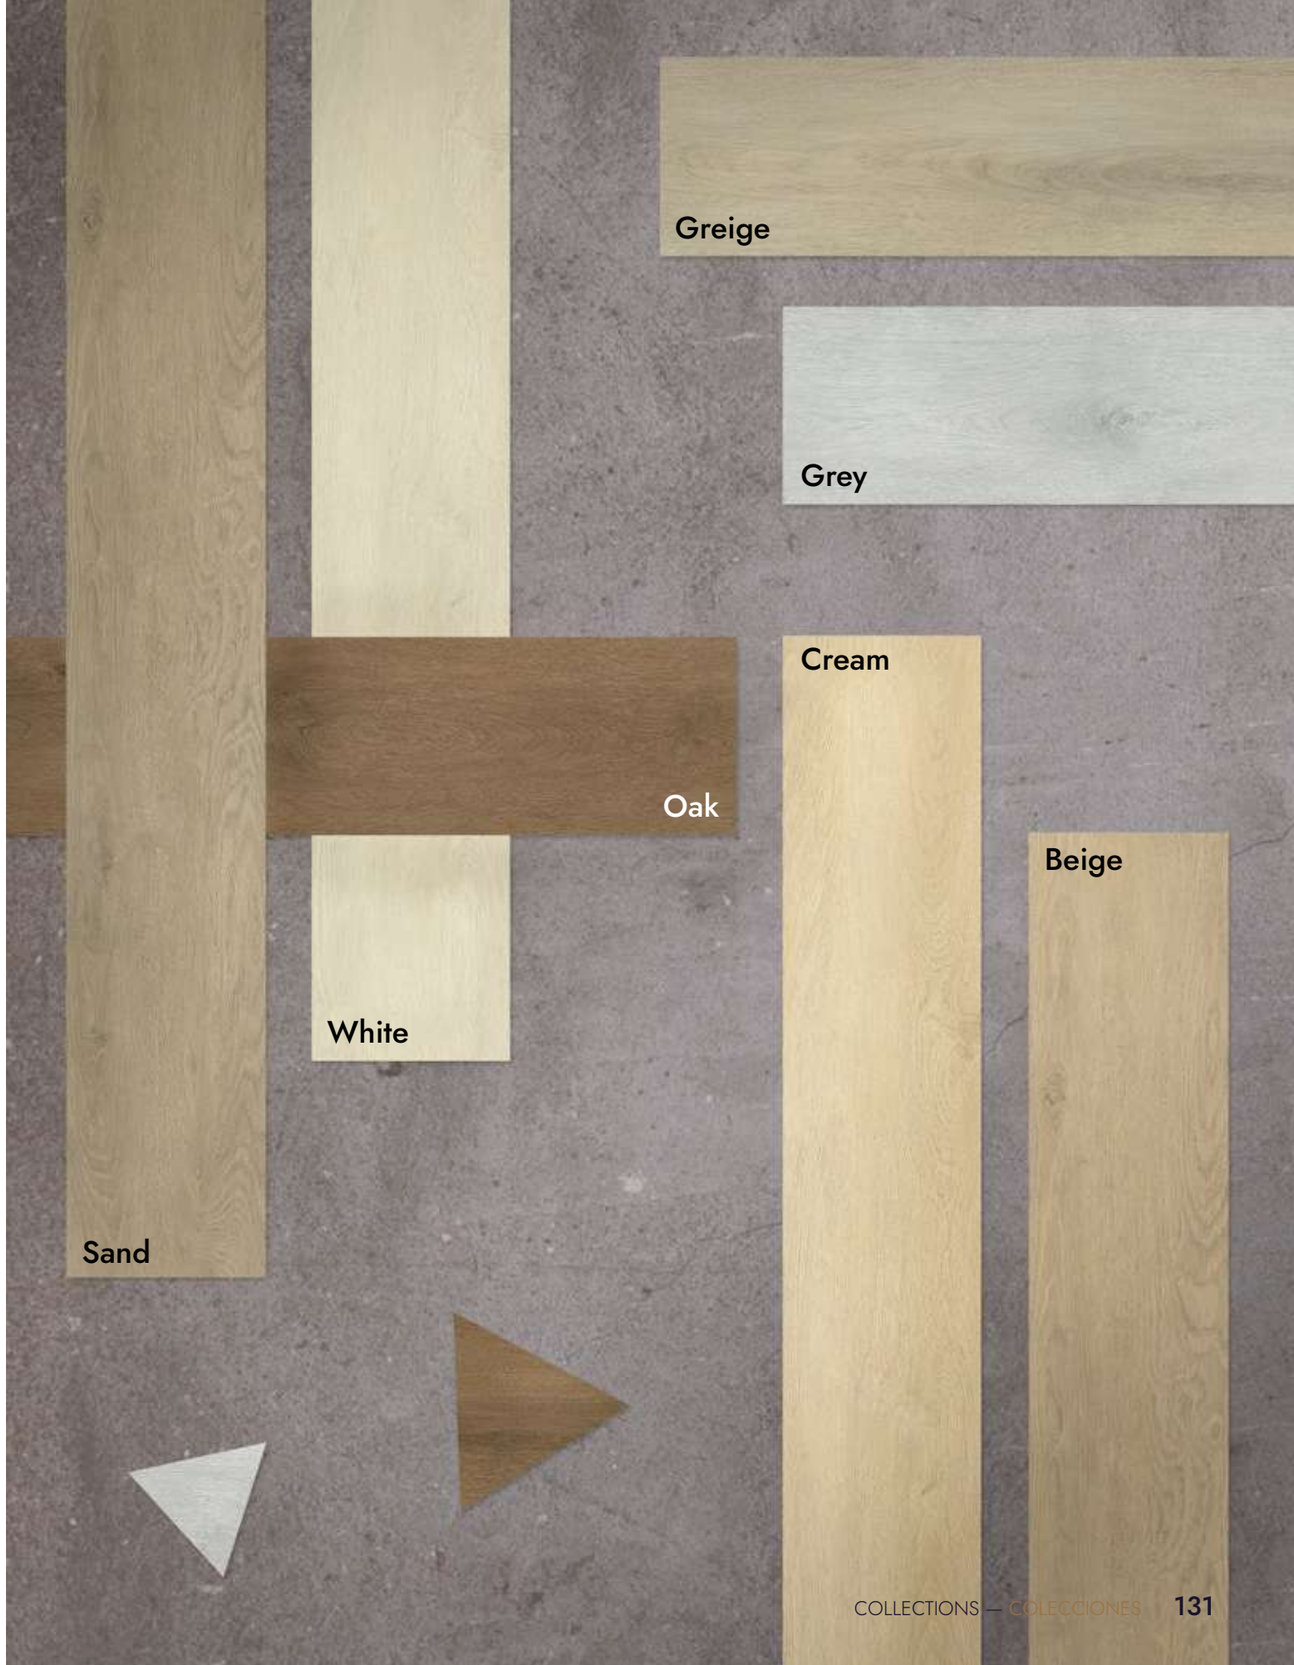

MUSK

Sand

MUSK Sand 18x152 cm · 7"x61"

MUSK Sand 18x152 cm · 7"x61"

MUSK
Sand

MUSK

White

MUSK White 18x152 cm · 7"x61"

MUSK Oak 18x152 cm · 7"x61"

MUSK

Oak

MUSK

Grey

MUSK Grey 18x152 cm - 7"x61"

MUSK Cream 18x152 cm · 7"x61"

MUSK
Cream

MUSK

Beige

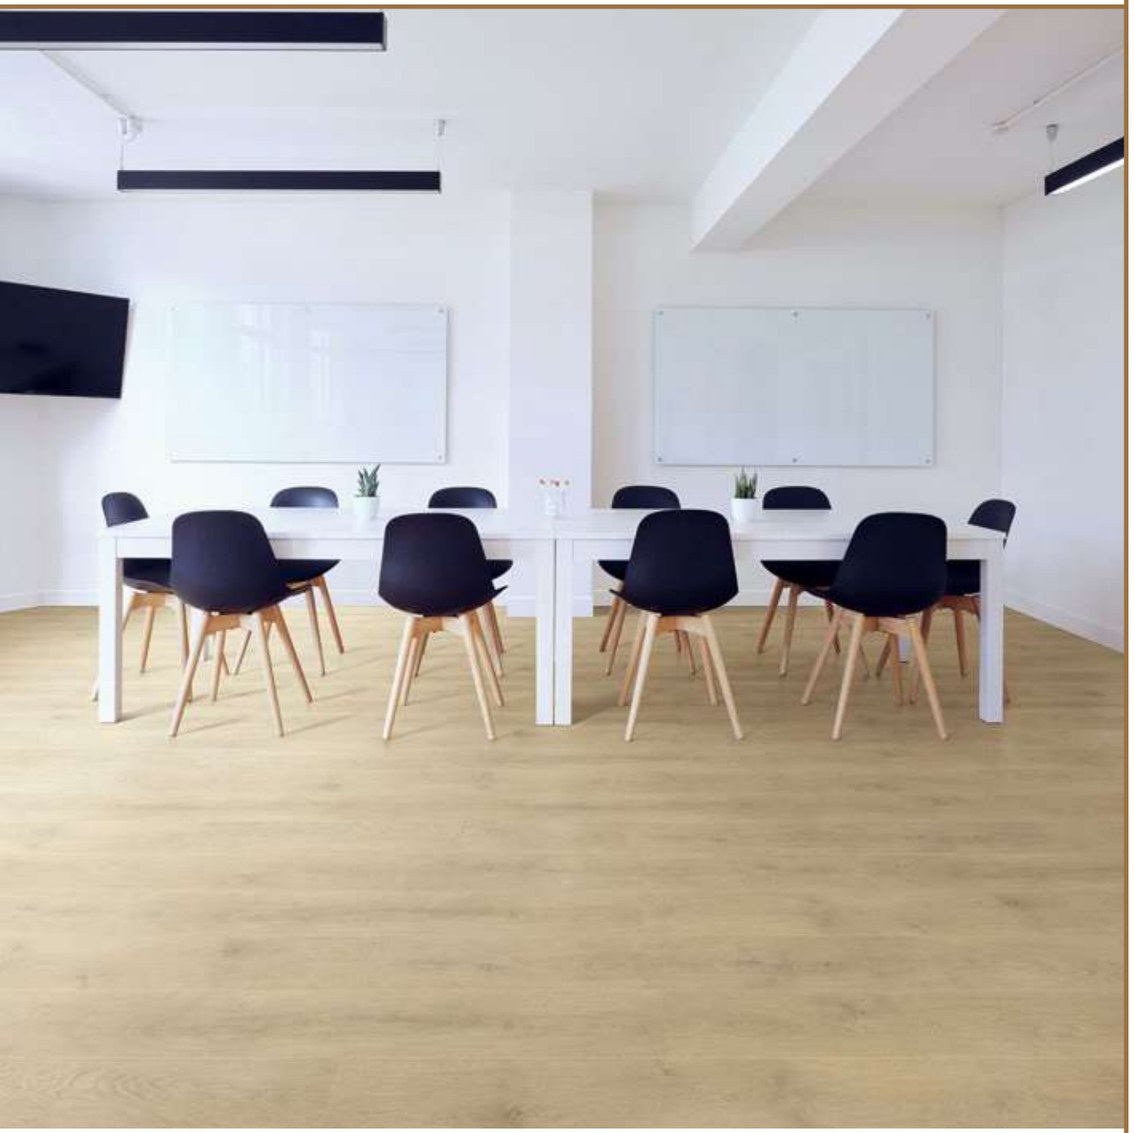

MUSK Beige 18x152 cm · 7"x61"

MUSK Greige 18x152 cm · 7"x61"

MUSK

Greige

MUSK

SPC ESPC GD

Size: 18x152 cm · 7"x61"
Faces: 4 per colour
Thickness: 3.5 mm, 4.0 mm, 5.0 mm
Wear layer: 0.3 mm
PAD typology: 1.0 mm IXPE PAD
Total Thickness: 4.5 mm, 5.0 mm, 6.0 mm

* Available designs per each colour.
* Despiece caras disponibles por color.

	SPC	ESPC	Glue Down	
Thickness	6mm	6,5mm	2,5mm	3mm
SQM/Box	2,103	2,103	4,2	3,86
Weight/Box	21kg	21kg	21kg	22,5kg
Pcs/Box	6	6	12	11
Box/ Pallet	60	60	60	56
Plt/Container	21	21	21	21

MUSK Grey

MUSK Beige

MUSK Sand

MUSK White

MUSK Cream

MUSK Greige

MUSK Oak

MUSTANG

Provides a really organic look thanks to its rustic design

NaturalFeel finish

Body Type:

SPC The stone core option.

ESPC Our most resistant system.

GD Ultimate glue application.

Faces: 5 per colour
Thickness: 4,5 mm (SPC), 5 mm (ESPC)
Wear layer: 0.55 mm
PAD typology: 1,5 mm IXPE (SPC, ESPC)
Total Thickness: 6 mm (SPC), 6,5 mm (ESPC), 2,5mm y 3 mm (GLUE DOWN)

Taupe

Oak

Ivory

Ash

Cotto

Greige

Antracite

MUSTANG Greige 23x152 cm · 9"x60"

MUSTANG

Greige

MUSTANG

Oak

MUSTANG Oak 23x152 cm · 9″x60″

MUSTANG

Oak

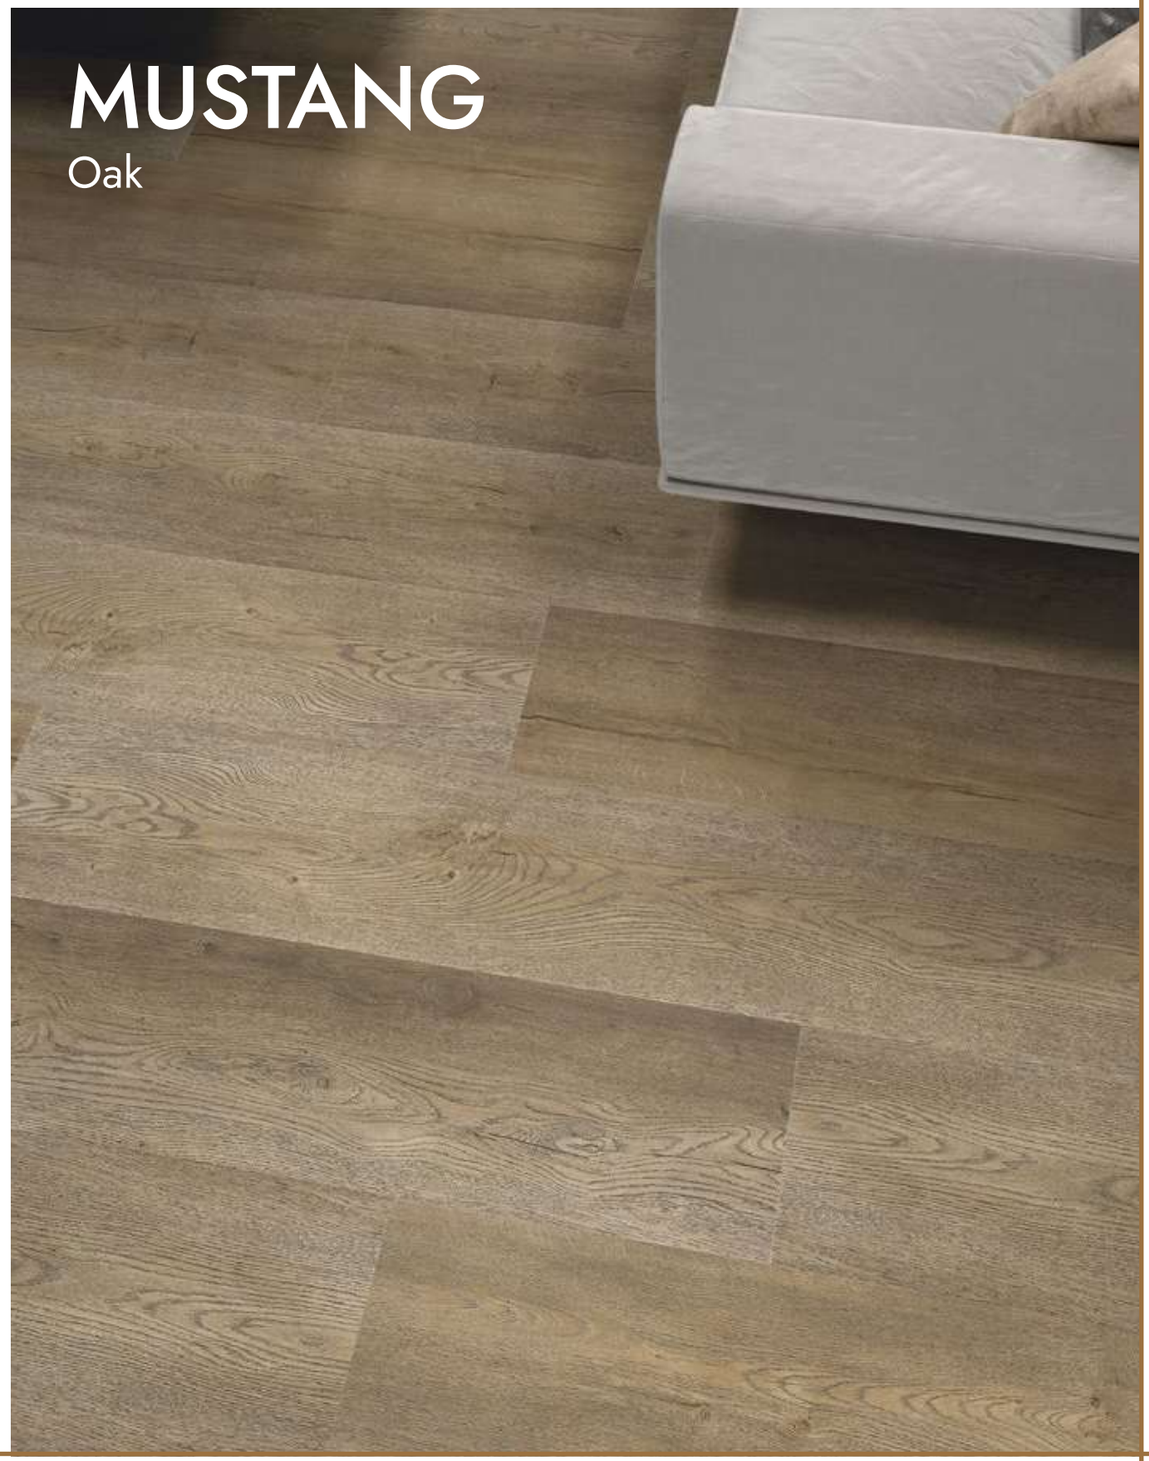

MUSTANG Oak 23x152 cm · 9"x60"

MUSTANG Ivory 23x152 cm · 9″x60″

MUSTANG

Ivory

MUSTANG

Ivory

MUSTANG

Taupe

MUSTANG Taupe 23x152 cm · 9″x60″

MUSTANG

Taupe

MUSTANG Taupe 23x152 cm · 9"x60"

MUSTANG Ash 23x152 cm · 9"x60"

MUSTANG

Ash

MUSTANG

Antracite

MUSTANG Antracite 23x152 cm · 9"x60"

MUSTANG

Cotto

MUSTANG Cotto 23x152 cm · 9″x60″

MUSTANG Cotto 23x152 cm · 9"x60"

MUSTANG

Cotto

MUSTANG

SPC ESPC GD

Size: 23x152 cm · 9"x60"
Faces: 5 per colour
Thickness: 4,5 mm (SPC), 5 mm (ESPC)
Wear layer: 0.55 mm
PAD typology: 1,5 mm IXPE PAD (SPC, ESPC)
Total Thickness: 6 mm (SPC), 6,5 mm (ESPC), 2,5mm y 3 mm (GLUE DOWN)

* Available designs per each colour.
* Despiece caras disponibles por color.

	SPC	ESPC	Glue Down	
Thickness	6mm	6,5mm	2,5mm	3mm
SQM/Box	2,103	2,103	4,2	3,86
Weight/Box	21kg	21kg	21kg	22,5kg
Pcs/Box	6	6	12	11
Box/ Pallet	60	60	60	56
Plt/Container	21	21	21	21

MUSTANG Ivory

MUSTANG Oak

MUSTANG Cotto

MUSTANG Ash

MUSTANG Greige

MUSTANG Taupe

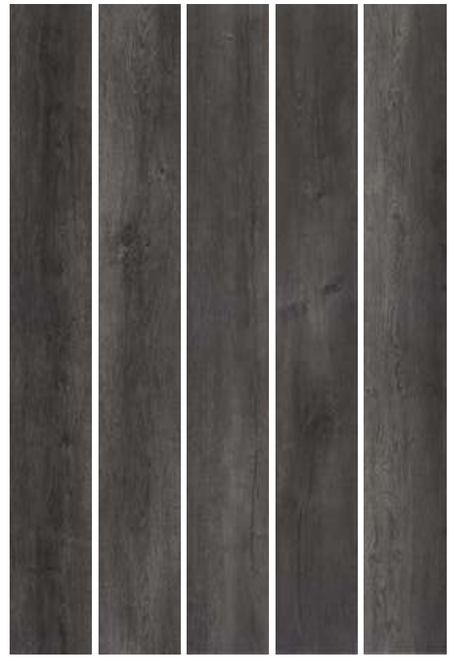

MUSTANG Antracite

PANAMERA

This collection evokes nature, which has a calming effect on the occupants.

NaturalFeel finish



Body Type:

SPC The stone core option.

ESPC Our most resistant system.

GD Ultimate glue application.

Faces: 4 per colour
Thickness: 4 mm (SPC), 5 mm (ESPC)
Wear layer: 0,55 mm
PAD typology: 1 mm IXPE (SPC), 1,5mm IXPE (ESPC)
Total Thickness: 5 mm (SPC), 6,5 mm (ESPC), 2,5mm y 3 mm (GLUE DOWN)

Taupe

Carbon

Grey

Peanut butter

Maple

PANAMERA Peanut butter 18x122 cm · 7"x48"

PANAMERA

Peanut butter

PANAMERA

Grey

PANAMERA Grey 18x122 cm · 7"x48"

PANAMERA

SPC ESPC GD

Size: 18x122 cm · 7"x48"
Faces: 4 per colour
Thickness: 4 mm (SPC), 5 mm (ESPC)
Wear layer: 0,55 mm
PAD typology: 1 mm IXPE (SPC), 1,5mm IXPE (ESPC)
Total Thickness: 5 mm (SPC), 6,5 mm (ESPC), 2,5mm y 3 mm (GLUE DOWN)

* Available designs per each colour.
* Despiece caras disponibles por color.

	SPC	ESPC	Glue Down	
Thickness	5mm	6,5mm	2,5mm	3mm
SQM/Box	2,196	2,196	3,95	3,51
Weight/Box	19,5kg	21kg	20kg	20,5kg
Pcs/Box	10	10	18	16
Box/ Pallet	70	60	60	60
Plt/Container	19	20	20	20

PANAMERA Peanut butter

PANAMERA Maple

PANAMERA Taupe

PANAMERA Grey

PANAMERA Carbon

POLARIS

Feel the exotic wood texture of Polaris; each of its seven tones offer special degrees of warmth to your space

NaturalFeel finish

Body Type:

SPC The stone core option.

ESPC Our most resistant system.

GD Ultimate glue application.

Faces: 5 per colour
Thickness: 5 mm (SPC), 6 mm (ESPC)
Wear layer: 0,55 mm
PAD typology: 1,5 mm IXPE PAD (SPC, ESPC)
Total Thickness: 6,5 mm (SPC), 7,5 mm (ESPC), 3 mm (GLUE DOWN)

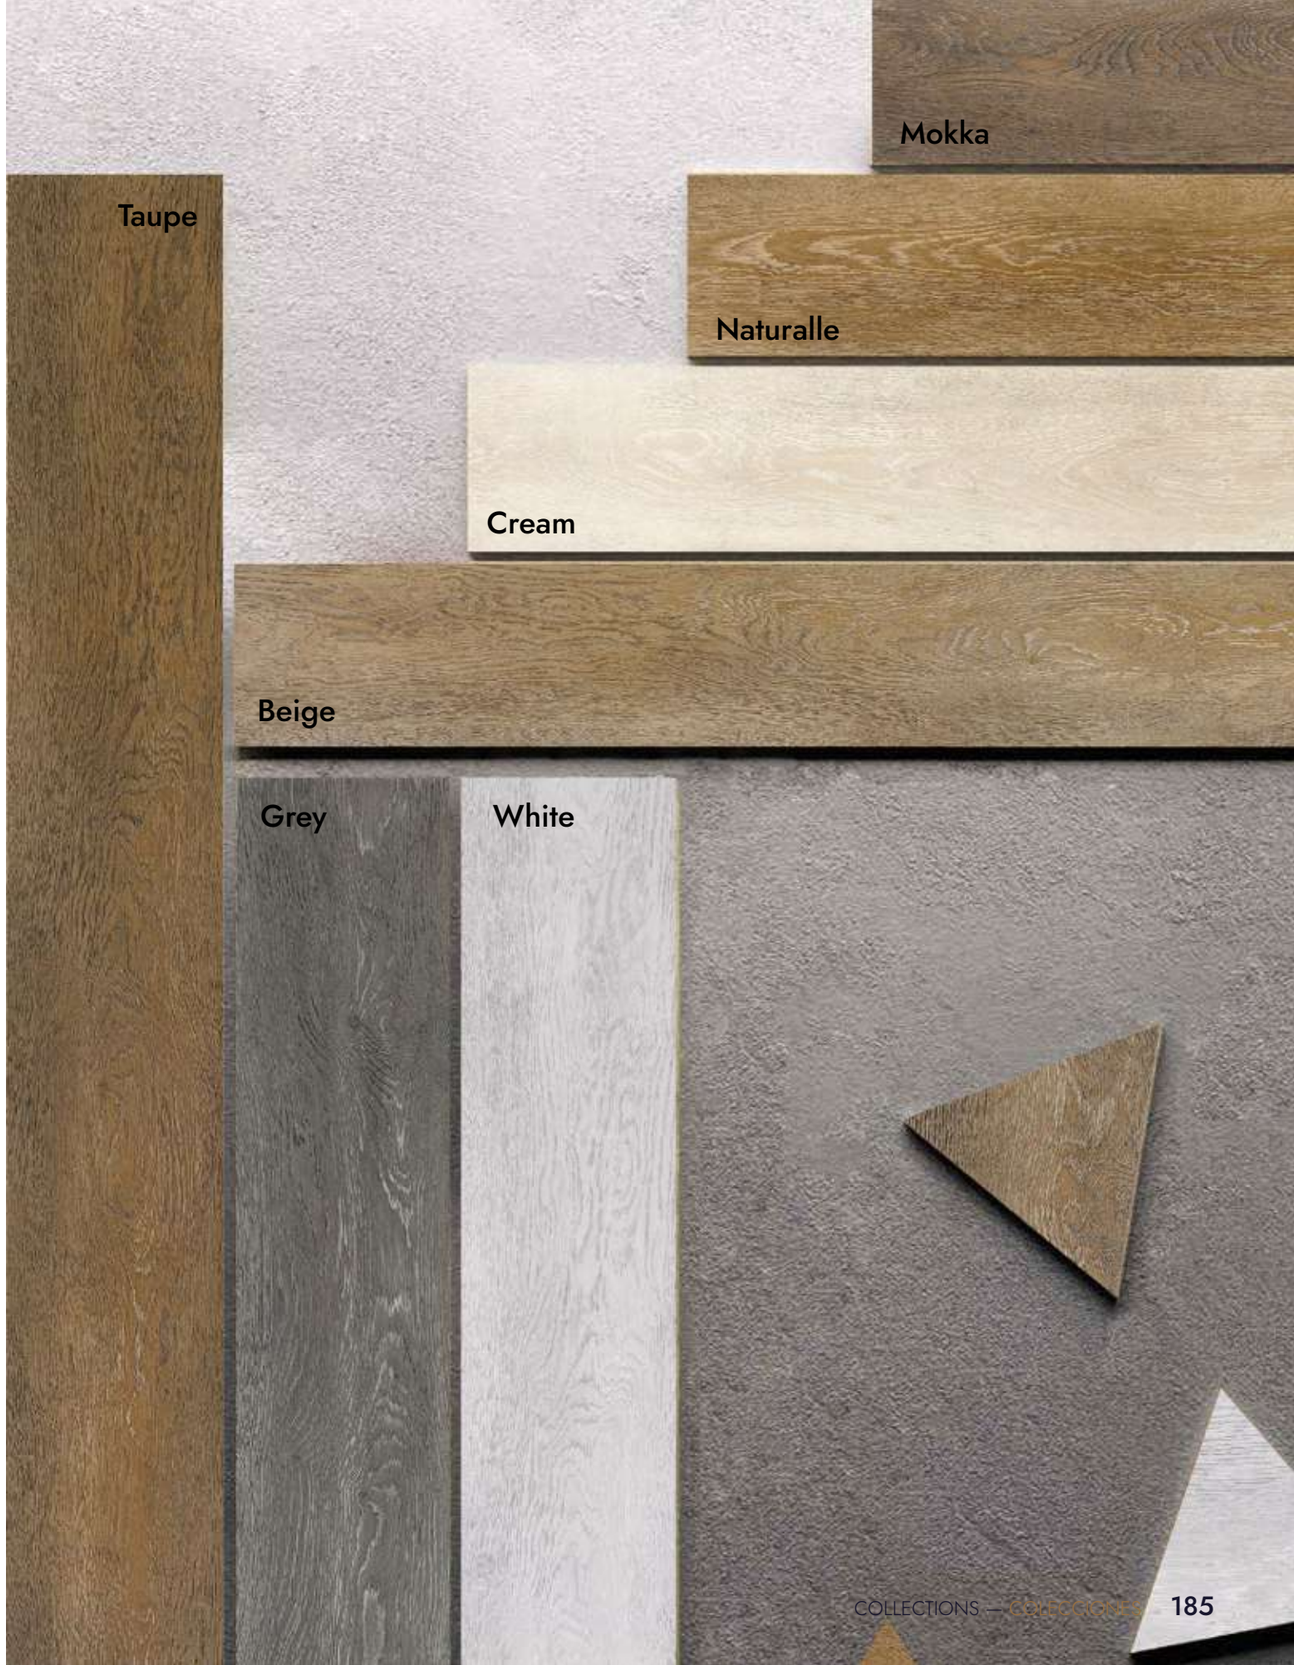

POLARIS Beige 18x183 cm · 7"x72"

POLARIS

Beige

POLARIS Beige 18x183 cm · 7"x72"

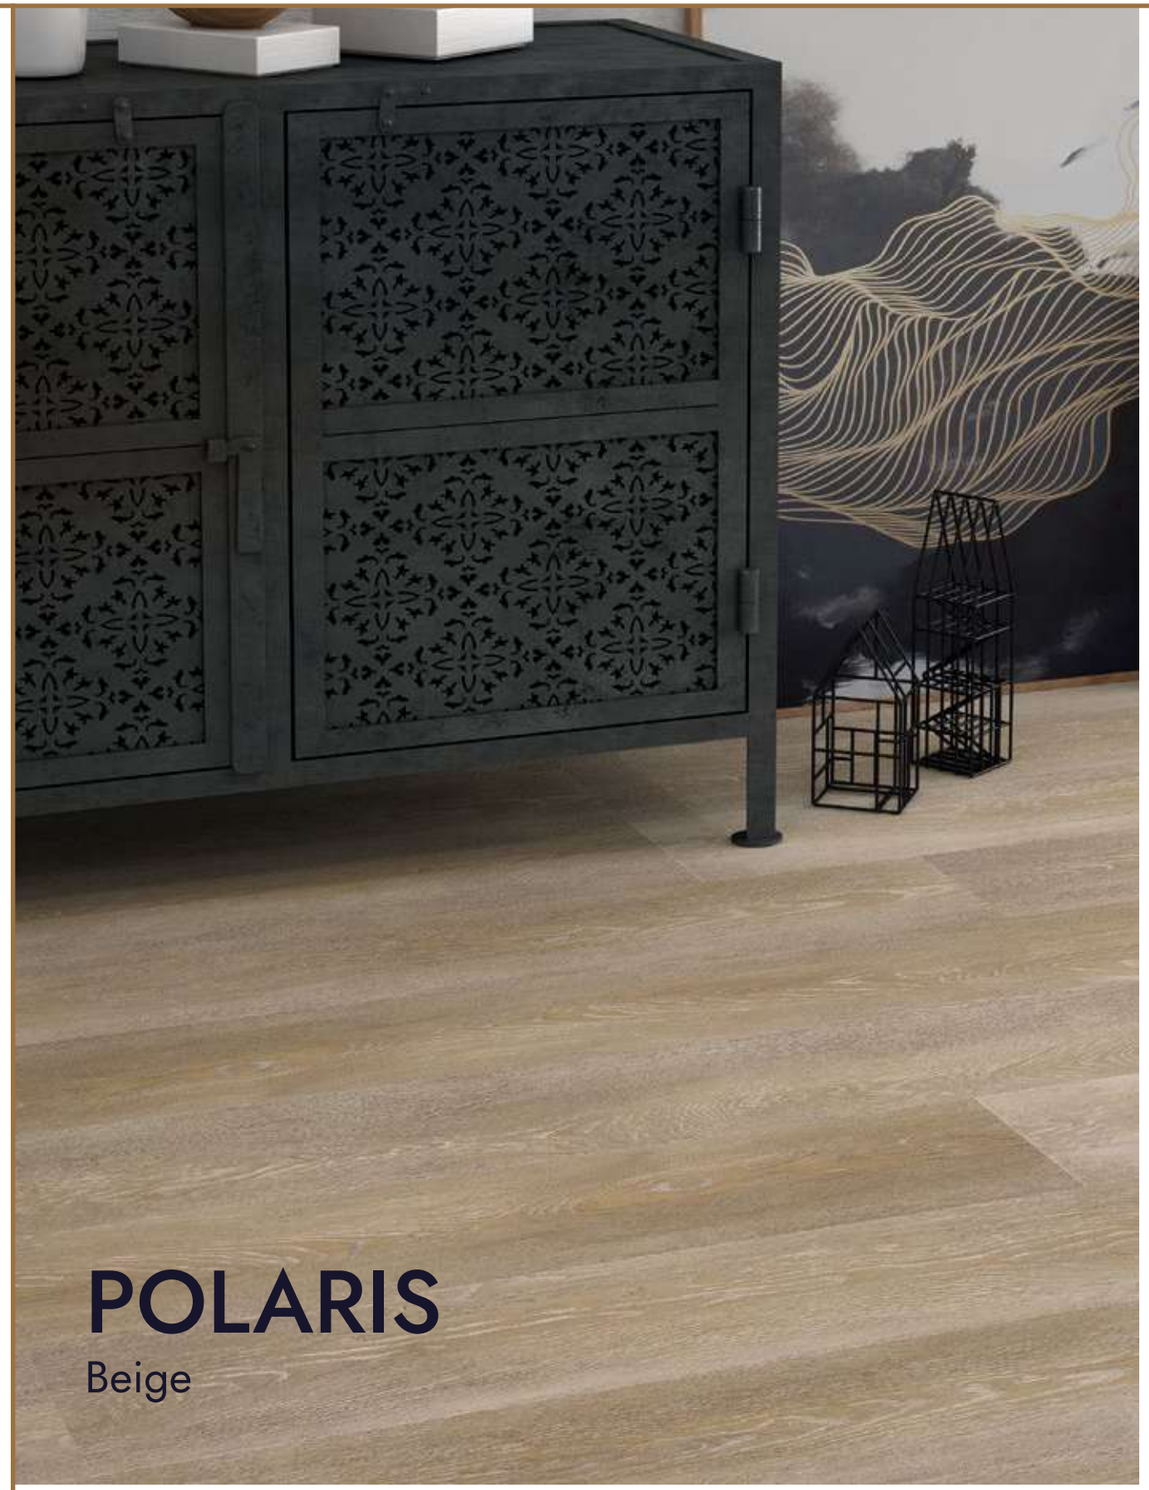

POLARIS

Beige

POLARIS

White

POLARIS White 18x183 cm · 7″x72″

POLARIS

White

POLARIS White 18x183 cm · 7"x72"

POLARIS

Mokka

POLARIS Mokka 18x183 cm · 7"x72"

POLARIS Mokka 18x183 cm - 7"x72"

POLARIS

Mokka

POLARIS

Cream

POLARIS Cream 18x183 cm · 7"x72"

POLARIS

Grey

POLARIS Grey 18x183 cm · 7"x72"

POLARIS

Grey

POLARIS Grey 18x183-cm · 7"x72"

POLARIS

Naturalle

POLARIS Naturalle 23x183 cm · 9"x72"

POLARIS

SPC ESPC GD

Size: 18x183 cm · 7"x72"
Faces: 5 per colour
Thickness: 5 mm (SPC), 6 mm (ESPC)
Wear layer: 0,55 mm
PAD typology: 1,5 mm IXPE PAD (SPC, ESPC)
Total Thickness: 6,5 mm (SPC), 7,5 mm (ESPC), 3 mm (GLUE DOWN)

* Available designs per each colour.
* Despiece caras disponibles por color.

	SPC	ESPC	Glue Down
Thickness	6,5mm	7,5mm	3mm
SQM/ Box	1,98	1,65	3,95
Weight/Box	21kg	23kg	23kg
Pcs/Box	6	5	12
Box/ Pallet	65	60	60
Plt/Cntr	18	18	18

POLARIS White

POLARIS Mokka

POLARIS Naturalle

POLARIS Cream

POLARIS Beige

POLARIS Taupe

POLARIS Grey

POLSTAR

Polstar´s variety of knots, grains and unique tones will add a distinctive character to your rooms.

NaturalFeel finish

Body Type:

SPC The stone core option.

ESPC Our most resistant system.

GD Ultimate glue application.

Faces: 4 per colour
Thickness: 4,5 mm (SPC), 5 mm (ESPC)
Wear layer: 0,55 mm
PAD typology: 1,5 mm IXPE PAD (SPC, ESPC)
Total Thickness: 6 mm (SPC), 6,5 mm (ESPC), 2,5mm y 3 mm (GLUE DOWN)

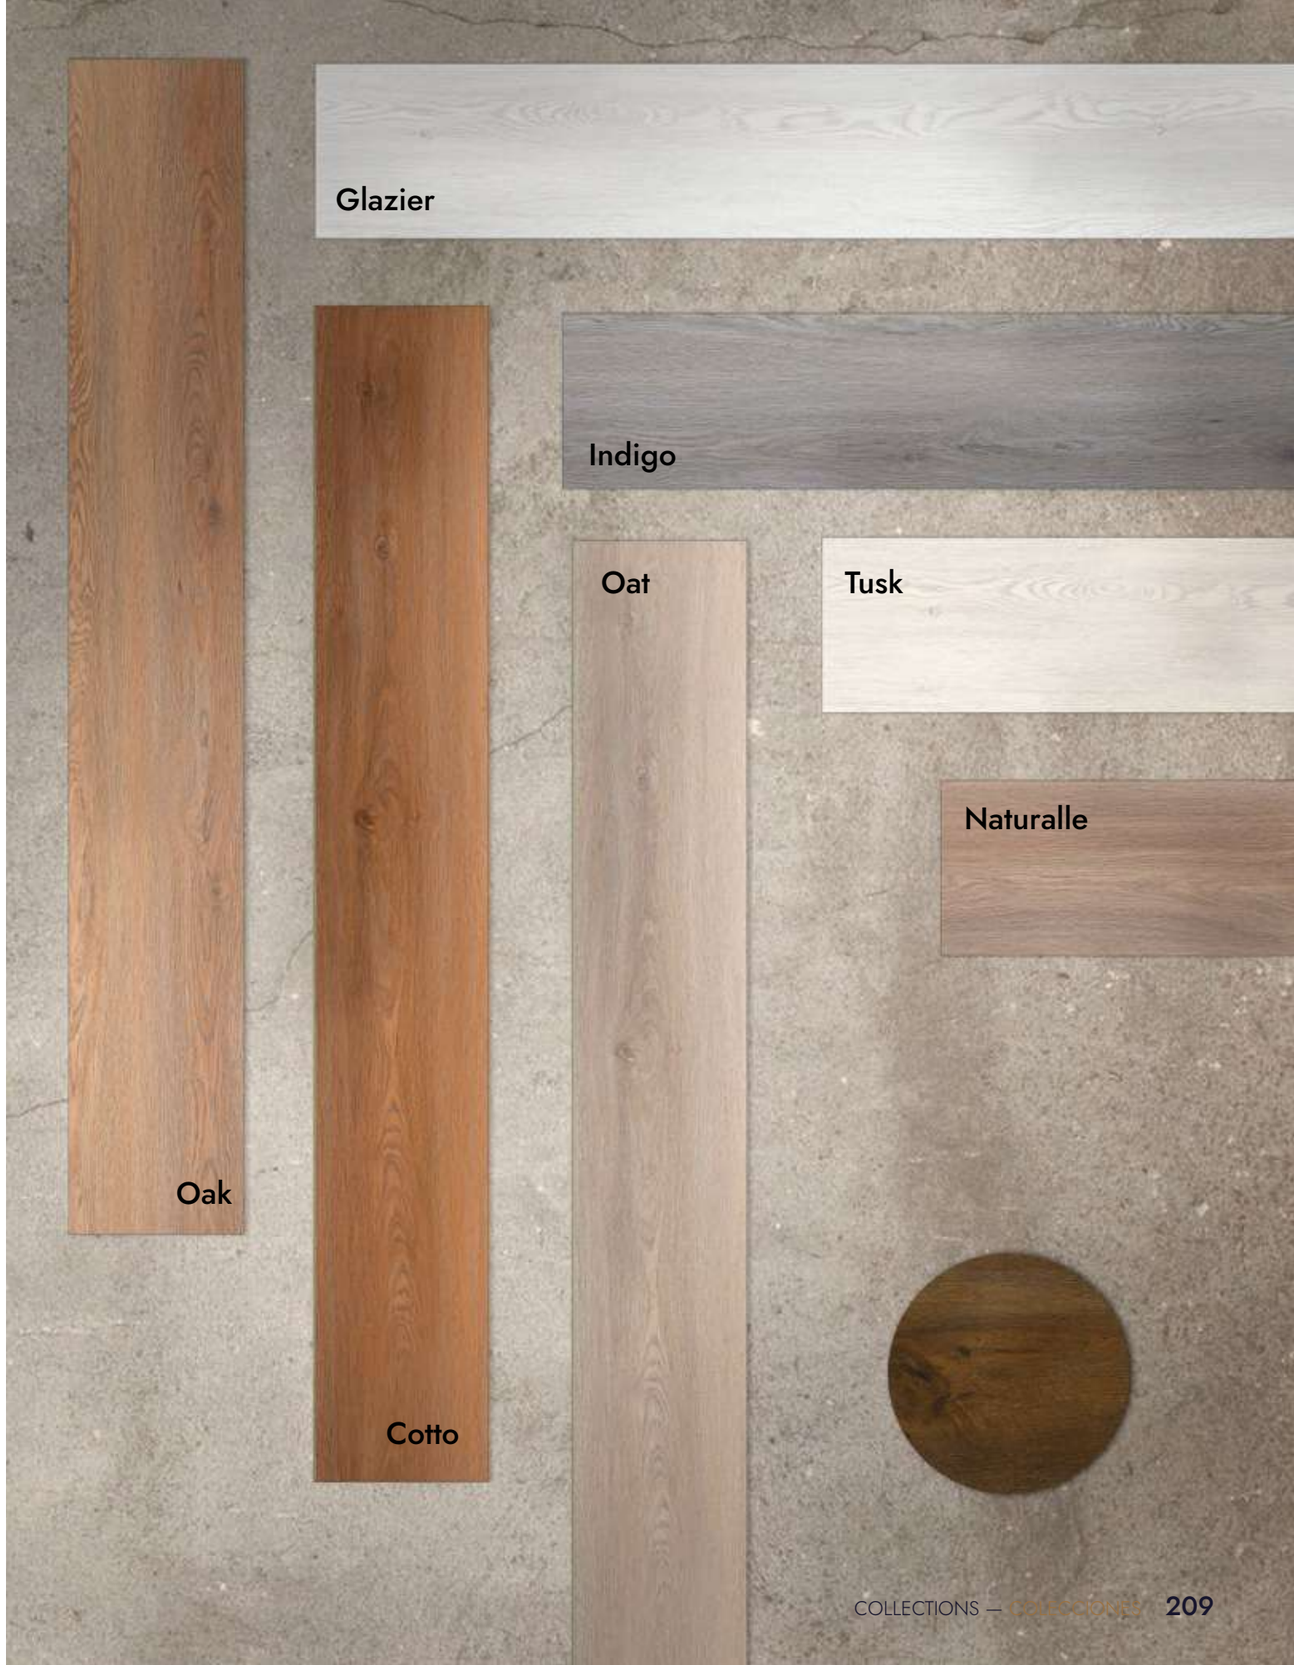

POLSTAR

Oat

POLSTAR Oat 23x152 cm · 9″x60″

POLSTAR

Oat

POLSTAR Oat 23x152 cm · 9"x60"

POLSTAR
Índigo

POLSTAR Índigo 23x152 cm · 9"x60"

POLSTAR

SPC ESPC GD

Size: 23x152 cm · 9"x60"
Faces: 5 per colour
Thickness: 4,5 mm (SPC), 5 mm (ESPC)
Wear layer: 0.55 mm
PAD typology: 1,5 mm IXPE PAD (SPC, ESPC)
Total Thickness: 6 mm (SPC), 6,5 mm (ESPC), 2,5mm y 3 mm (GLUE DOWN)

* Available designs per each colour.
* Despiece caras disponibles por color.

	SPC	ESPC	Glue Down	
Thickness	6mm	6,5mm	2,5mm	3mm
SQM/Box	2,103	2,103	4,2	3,86
Weight/Box	21kg	21kg	21kg	22,5kg
Pcs/Box	6	6	12	11
Box/ Pallet	60	60	60	56
Plt/Container	21	21	21	21

POLSTAR Glazier

POLSTAR Oak

POLSTAR Naturalle

POLSTAR Tusk

POLSTAR Oat

POLSTAR Cotto

POLSTAR Indigo

RIO

This flooring collection adds personality and atmosphere to any interior setting.

NaturalFeel finish

Body Type:

SPC The stone core option.

ESPC Our most resistant system.

GD Ultimate glue application.

Faces: 8 per colour
Thickness: 4,5 mm (SPC), 5 mm (ESPC)
Wear layer: 0,55 mm
PAD typology: 1,5 mm IXPE PAD (SPC, ESPC)
Total Thickness: 6 mm (SPC), 6,5 mm (ESPC), 2,5mm y 3 mm (GLUE DOWN)

Cloud grey

Blue maple

Indi grey

Auburn

Dawn

RIO

Cloud Grey

RIO Cloud grey 23x152 cm · 9"x60"

RIO

SPC ESPC GD

Size: 23x152 cm · 9"x60"
Faces: 5 per colour
Thickness: 4,5 mm (SPC), 5 mm (ESPC)
Wear layer: 0.55 mm
PAD typology: 1,5 mm IXPE PAD (SPC, ESPC)
Total Thickness: 6 mm (SPC), 6,5 mm (ESPC), 2,5mm y 3 mm (GLUE DOWN)

* Available designs per each colour.
* Despiece caras disponibles por color.

	SPC	ESPC	Glue Down	
Thickness	6mm	6,5mm	2,5mm	3mm
SQM/Box	2,103	2,103	4,2	3,86
Weight/Box	21kg	21kg	21kg	22,5kg
Pcs/Box	6	6	12	11
Box/ Pallet	60	60	60	56
Plt/Container	21	21	21	21

RIO Blue maple

RIO Indi grey

RIO Cloud grey

RIO Auburn

RIO Dawn

ROYCE

A versatile collection. It can serve as the backdrop for a busy and vibrant room, or as a subtle compliment to a quieter, more subdued space.

NaturalFeel finish

Body Type:

SPC The stone core option.

ESPC Our most resistant system.

GD Ultimate glue application.

Faces: 4 per colour
Thickness: 4,5 mm (SPC), 5 mm (ESPC)
Wear layer: 0,55 mm
PAD typology: 1,5 mm IXPE PAD (SPC, ESPC)
Total Thickness: 6 mm (SPC), 6,5 mm (ESPC), 2,5mm y 3 mm (GLUE DOWN)

ROYCE

Ivory

ROYCE Ivory 23x152 cm · 9"x60"

ROYCE

Ivory

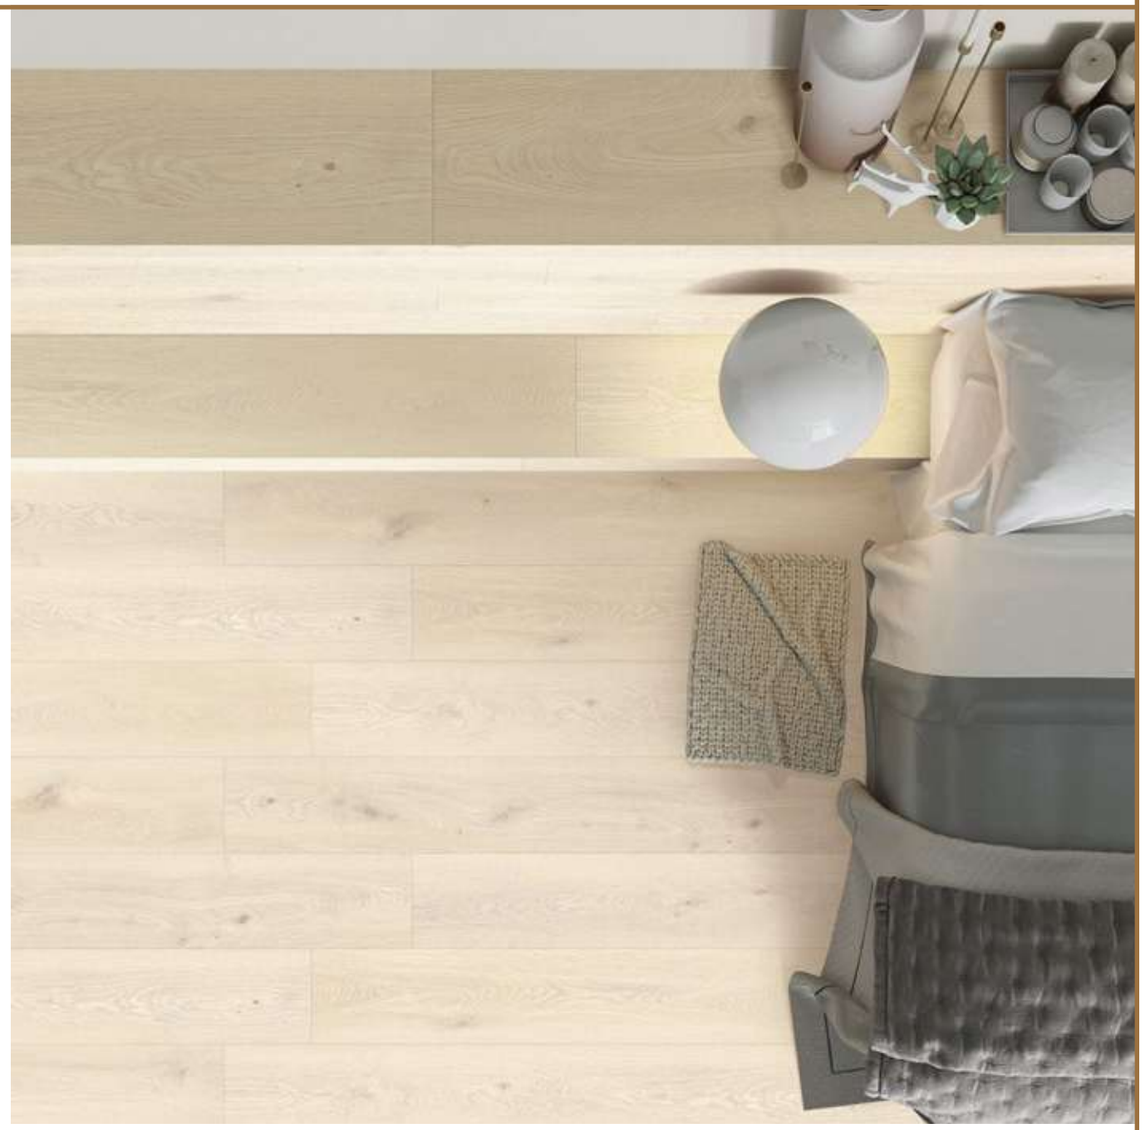

ROYCE Ivory 23x152 cm · 9"x60"

ROYCE

Beige

ROYCE Beige 23x152 cm · 9"x60"

ROYCE Beige 23x152 cm · 9"x60"

ROYCE
Beige

ROYCE
Choco

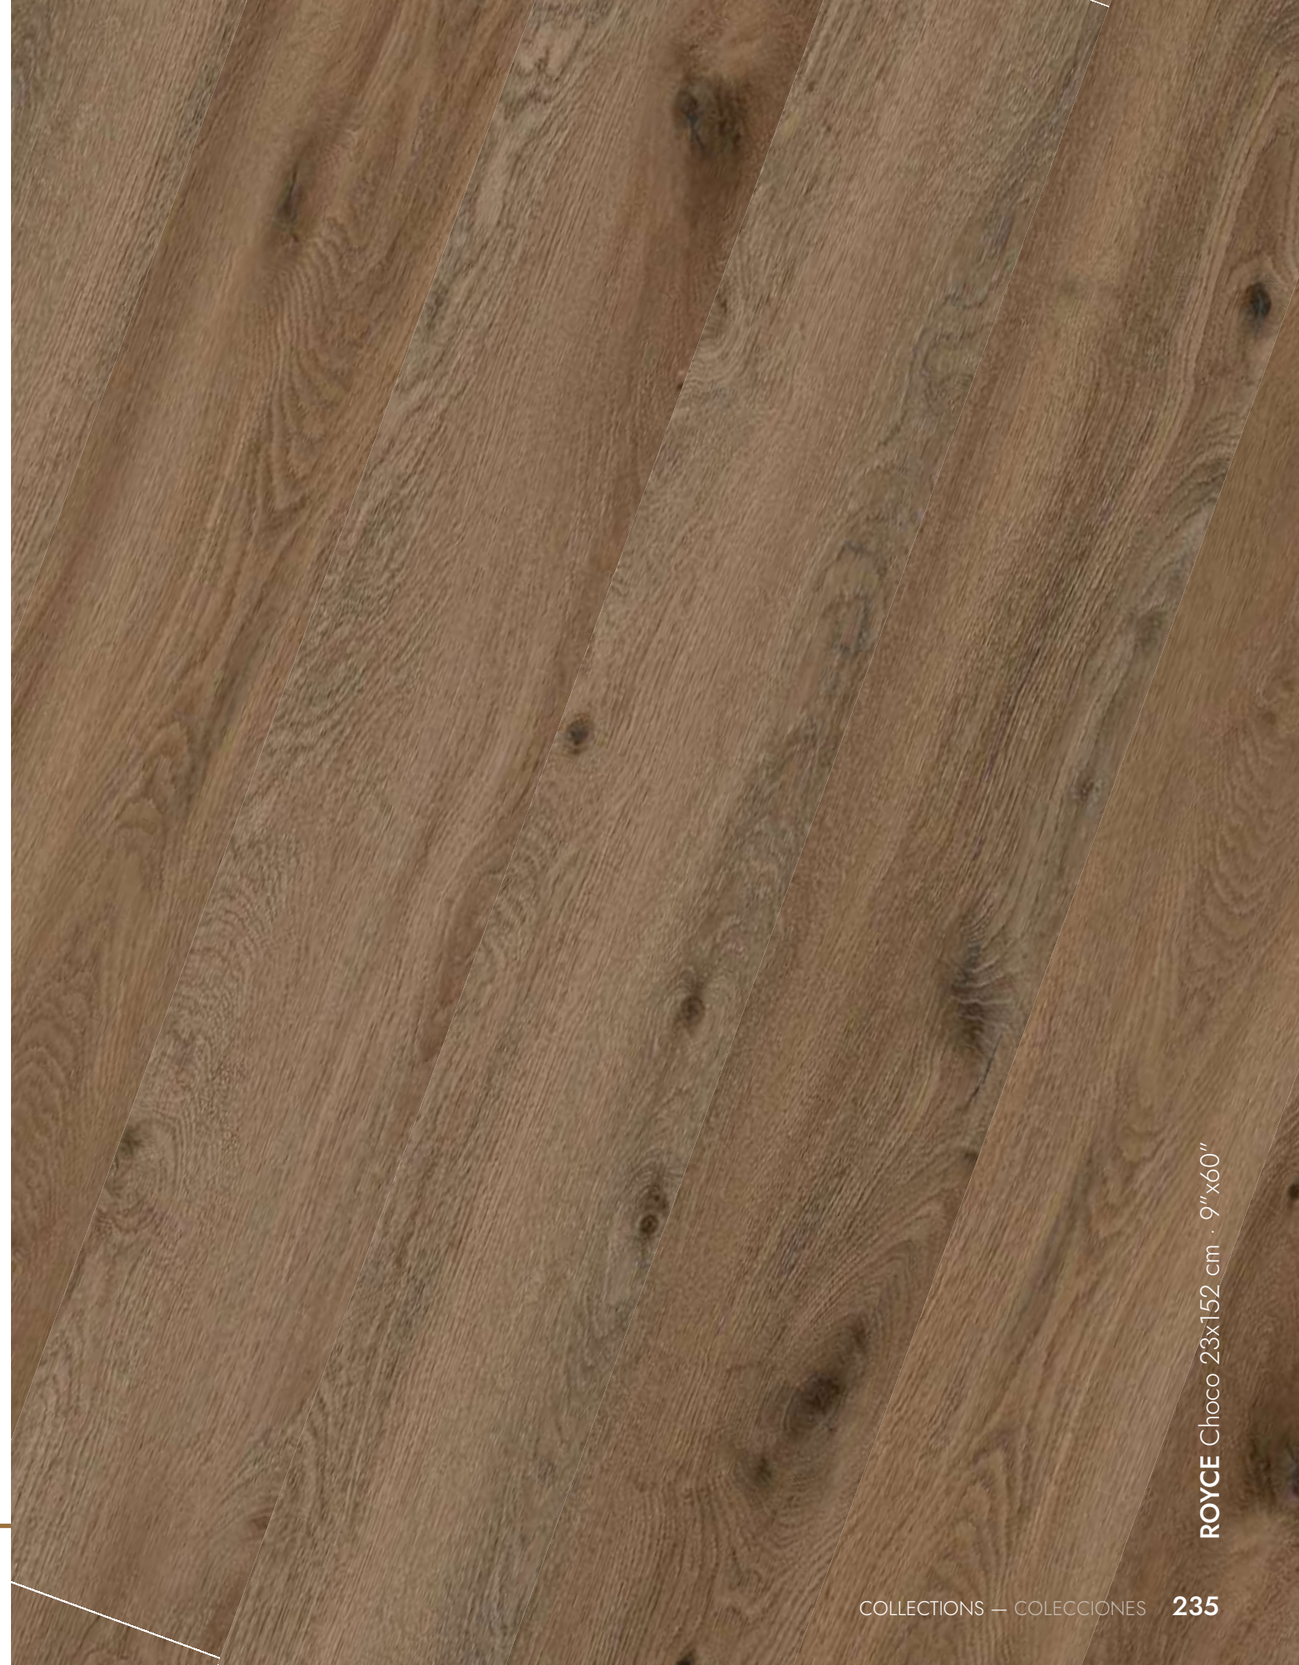

ROYCE Choco 23x152 cm · 9"x60"

ROYCE

Taupe

ROYCE Taupe 23x152 cm · 9"x60"

ROYCE

Silver

ROYCE Silver 23x152 cm · 9"x60"

ROYCE

SPC ESPC GD

Size: 23x152 cm · 9"x60"
Faces: 5 per colour
Thickness: 4,5 mm (SPC), 5 mm (ESPC)
Wear layer: 0.55 mm
PAD typology: 1,5 mm IXPE PAD (SPC, ESPC)
Total Thickness: 6 mm (SPC), 6,5 mm (ESPC), 2,5mm y 3 mm (GLUE DOWN)

* Available designs per each colour.
* Despiece caras disponibles por color.

ROYCE Ivory

ROYCE Oak

ROYCE Taupe

ROYCE Beige

ROYCE Silver

ROYCE Choco

	SPC	ESPC	Glue Down	
Thickness	6mm	6,5mm	2,5mm	3mm
SQM/Box	2,103	2,103	4,2	3,86
Weight/Box	21kg	21kg	21kg	22,5kg
Pcs/Box	6	6	12	11
Box/ Pallet	60	60	60	56
Plt/Container	21	21	21	21

SATURN

Shaded effects for each colour that offers a very realistic finish to your spaces

NaturalFeel finish



Body Type:

SPC The stone core option.

ESPC Our most resistant system.

GD Ultimate glue application.

Faces: 5 per colour
Thickness: 4 mm (SPC), 5 mm (ESPC)
Wear layer: 0,55 mm
PAD typology: 1 mm IXPE (SPC), 1,5mm IXPE (ESPC)
Total Thickness: 5 mm (SPC), 6,5 mm (ESPC), 2,5mm y 3 mm (GLUE DOWN)

Brown

White

Wengue

Grey

SATURN

Brown

SATURN Brown 18x122 cm · 7"x48"

SATURN Brown 18x122 cm · 7"x48"

SATURN

Brown

SATURN

Grey

SATURN Grey 18x122 cm · 7"x48"

SATURN

Grey

SATURN Grey 18x122 cm · 7"x48"

SATURN

White

SATURN White 18x122 cm · 7″x48″

SATURN White 18x122 cm · 7"x48"

SATURN

White

SATURN

Wengue

SATURN Wengue 18x122 cm · 7″x48″

SATURN

Wengue

SATURN Wengue 18x122 cm · 7"x48"

SATURN

SPC | ESPC | GD

Size: 18x122 cm · 7"x48"
Faces: 5 per colour
Thickness: 4 mm (SPC), 5 mm (ESPC)
Wear layer: 0,55 mm
PAD typology: 1 mm IXPE (SPC), 1,5mm IXPE (ESPC)
Total Thickness: 5 mm (SPC), 6,5 mm (ESPC), 2,5mm y 3 mm (GLUE DOWN)

* Available designs per each colour.
* Despiece caras disponibles por color.

	SPC	ESPC	Glue Down	
Thickness	5mm	6,5mm	2,5mm	3mm
SQM/Box	2,196	2,196	3,95	3,51
Weight/Box	19,5kg	21kg	20kg	20,5kg
Pcs/Box	10	10	18	16
Box/ Pallet	70	60	60	60
Plt/Container	19	20	20	20

SATURN White

SATURN Grey

SATURN Brown

SATURN Wengue

SPLENDOR

The rustic feel of these planks adds a level of authenticity to a room.

NaturalFeel finish



Body Type:

SPC The stone core option.

ESPC Our most resistant system.

GD Ultimate glue application.

Faces: 6 per colour
Thickness: 4 mm (SPC), 5 mm (ESPC)
Wear layer: 0,55 mm
PAD typology: 1 mm IXPE (SPC), 1,5mm IXPE (ESPC)
Total Thickness: 5 mm (SPC), 6,5 mm (ESPC), 2,5mm y 3 mm (GLUE DOWN)

Grey
Cotto
Wengue
Beige
Vanilla
Ice
Taupe

SPLENDOR Cotto 18x122 cm · 7"x48"

SPLENDOR

Cotto

SPLENDOR

Vanilla

SPLENDOR Vanilla 18x122 cm · 7"x48"

SPLENDOR

SPC | ESPC | GD

Size: 18x122 cm · 7"x48"
Faces: 6 per colour
Thickness: 4 mm (SPC), 5 mm (ESPC)
Wear layer: 0,55 mm
PAD typology: 1 mm IXPE (SPC), 1,5mm IXPE (ESPC)
Total Thickness: 5 mm (SPC), 6,5 mm (ESPC), 2,5mm
y 3 mm (GLUE DOWN)

* Available designs per each colour.
* Despiece caras disponibles por color.

	SPC	ESPC	Glue Down	
Thickness	5mm	6,5mm	2,5mm	3mm
SQM/Box	2,196	2,196	3,95	3,51
Weight/Box	19,5kg	21kg	20kg	20,5kg
Pcs/Box	10	10	18	16
Box/ Pallet	70	60	60	60
Plt/Container	19	20	20	20

SPLENDOR Ice

SPLENDOR Beige

SPLENDOR Cotto

SPLENDOR Grey

SPLENDOR Crema

SPLENDOR Taupe

SPLENDOR Wengue

VOSS

A wide range of colours that match perfectly in every room.

NaturalFeel finish

Body Type:

SPC The stone core option.

ESPC Our most resistant system.

GD Ultimate glue application.

Faces: 4 per colour
Thickness: 4,5 mm (SPC), 5 mm (ESPC)
Wear layer: 0,55 mm
PAD typology: 1,5 mm IXPE PAD (SPC, ESPC)
Total Thickness: 6 mm (SPC), 6,5 mm (ESPC), 2,5mm y 3 mm (GLUE DOWN)

Roble

Ivory

Taupe

Beech

Grey

Beige

White

VOSS Beige 23x152 cm · 9"x60"

VOSS
Beige

VOSS

Grey

VOSS Grey 23x152 cm · 9"x60"

VOSS

Grey

VOSS Grey 23x152 cm · 9"x60"

VOSS
Roble

VOSS Roble 23x152 cm · 9"x60"

VOSS

SPC | ESPC | GD

Size: 23x152 cm · 9"x60"
Faces: 4 per colour
Thickness: 4,5 mm (SPC), 5 mm (ESPC)
Wear layer: 0.55 mm
PAD typology: 1,5 mm IXPE PAD (SPC, ESPC)
Total Thickness: 6 mm (SPC), 6,5 mm (ESPC), 2,5mm y 3 mm (GLUE DOWN)

* Available designs per each colour.
* Despiece caras disponibles por color.

	SPC	ESPC	Glue Down	
Thickness	6mm	6,5mm	2,5mm	3mm
SQM/Box	2,103	2,103	4,2	3,86
Weight/Box	21kg	21kg	21kg	22,5kg
Pcs/Box	6	6	12	11
Box/ Pallet	60	60	60	56
Plt/Container	21	21	21	21

VOSS White

VOSS Grey

VOSS Ivory

VOSS Beige

VOSS Roble

VOSS Beech

VOSS Taupe

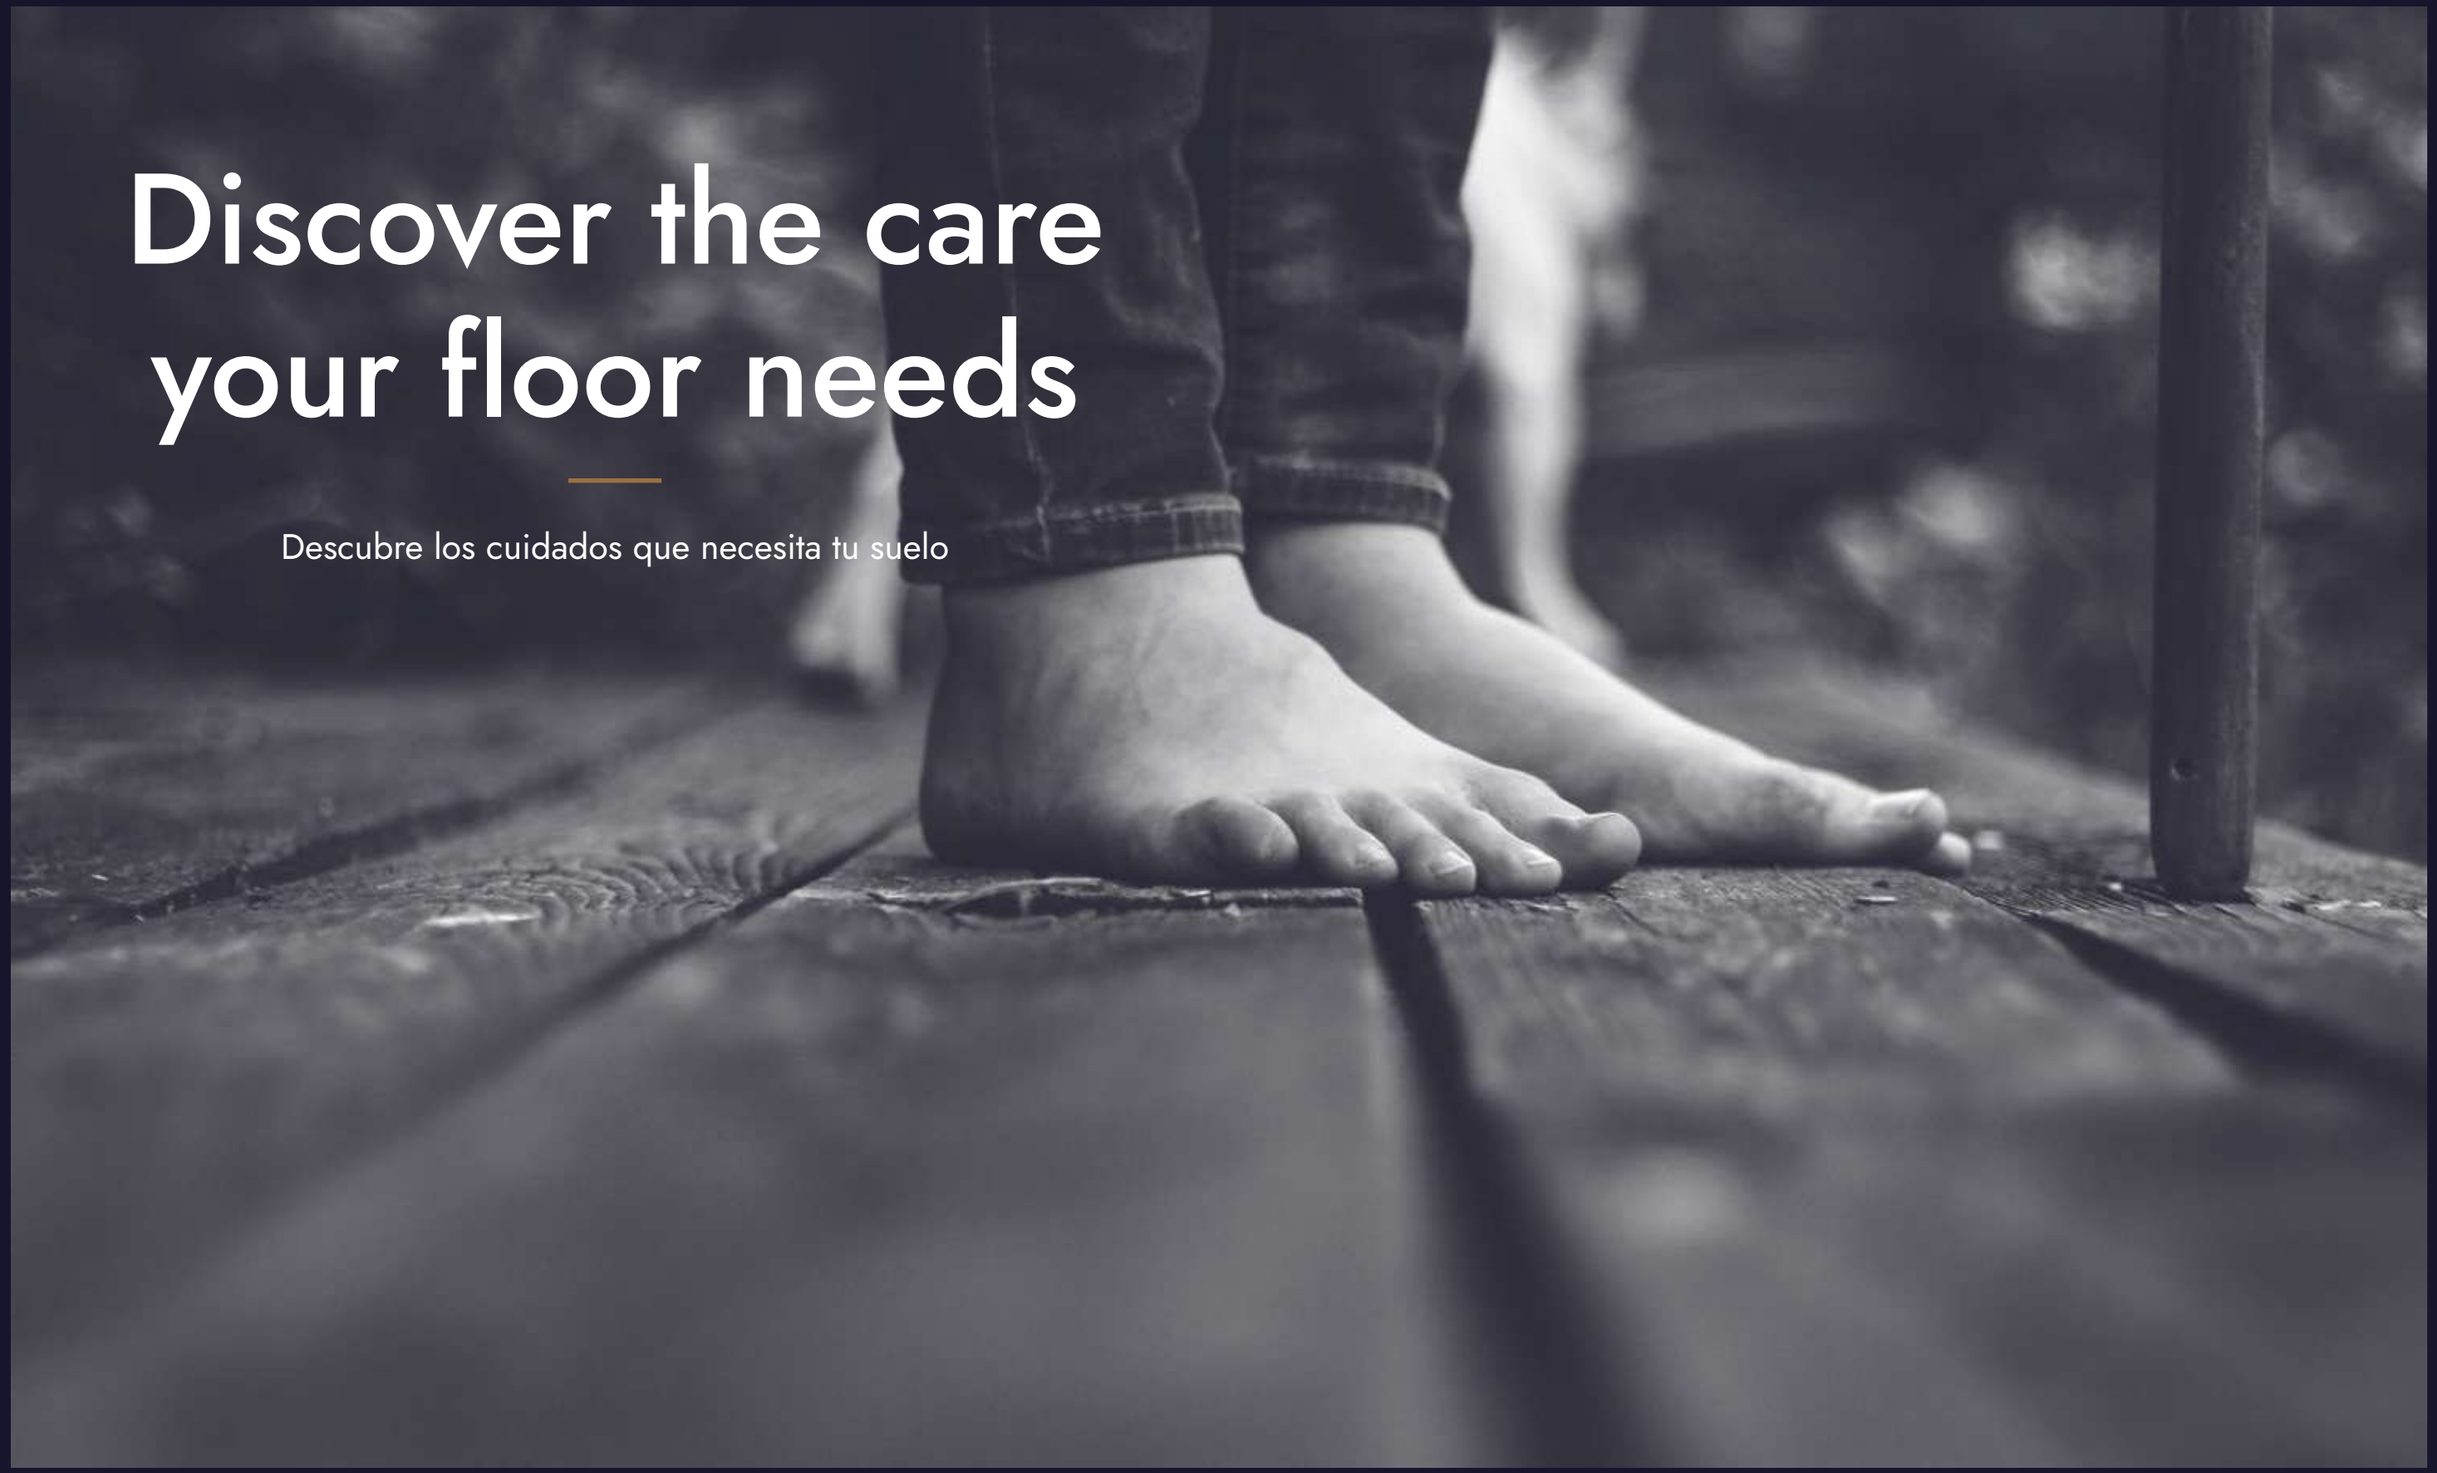

Discover the care your floor needs

Descubre los cuidados que necesita tu suelo

COORDINATING TRIMS

MOLDURAS DE COORDINACIÓN

AVAILABLE FOR ANY FLOOR

With an SPC core, it has a 0,12mm wear layer. The colour of the trim is available and coordinated with the colour of your floor, having a thickness between 3-7 mm. All of our products have a maximum length of 2400 mm.

DISPONIBLE PARA CUALQUIER SUELO

Con un núcleo de SPC, tiene una capa de desgaste de 0,12 mm. El color de la moldura está disponible y coordinado con el color de tu suelo, teniendo un espesor entre 3-7 mm. Todos nuestros productos tienen un largo máximo de 2400 mm.

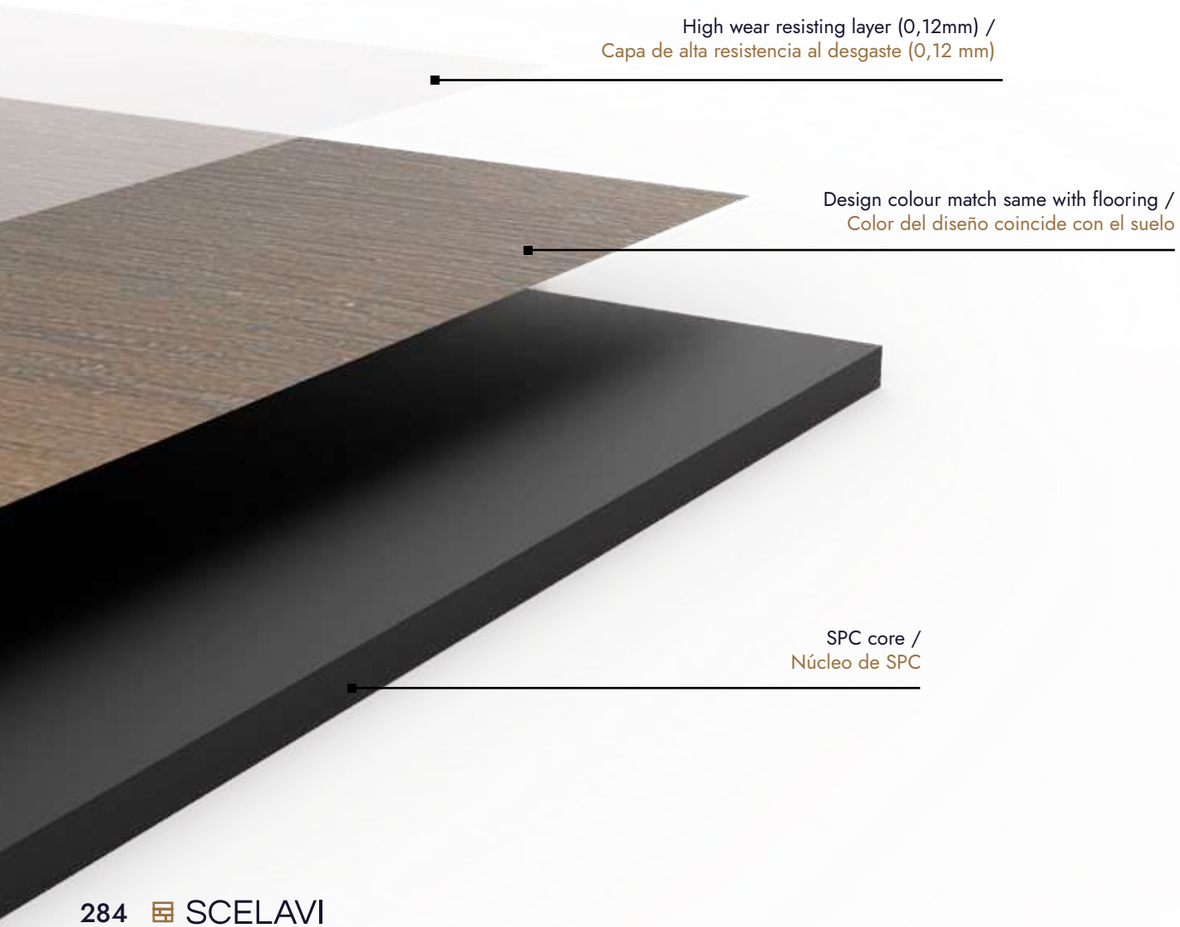

T-MOLDING
MOLDURA EN T

FLUSH STAIR NOSE
NARIZ DE ESCALERA A RAS

REDUCER
REDUCTOR

SQUARE FLUSH STAIR NOSE
NARIZ DE ESCALERA CUADRADA A RAS

END-CAP
TAPA FINAL

QUARTER ROUND
CUARTO BOCEL

STAIR NOSE
NARIZ DE ESCALERA

TRACK
CARRIL

SPC Coordinating Trims

Core material: Virgin SPC
Wear layer: 0,12 mm
Matching flooring thickness: 3-7 mm
Length: 2400 mm

Molduras de Coordinación SPC

Núcleo del material: SPC virgen
Capa de desgaste: 0,12 mm
Espesor del suelo a juego: 3-7 mm
Largo: 2400 mm

COORDINATING TRIMS

MOLDURAS DE COORDINACIÓN

Multi Trim

New type multi moldings, function as Reducer, End-cap and T-molding at the same time. With a flexible plastic nail. Composed of a 0,12mm wear layer and a flooring thickness matching of 3-12mm.
Available size is 2400x50x6,5mm.

Moldura Multi

Nuevo tipo de molduras múltiples, funcionan como reductor, tapa de extremo y moldura en T al mismo tiempo. Con un clavo de plástico flexible. Compuesto por una capa de desgaste de 0,12mm y un espesor entre 3-12 mm.
El tamaño disponible es de 2400x50x6,5mm

REDUCER
REDUCTOR



Gradual transition to floors of lower heights /
Transición gradual a suelos de menor altura

T-MOLDING
MOLDURA EN T



Transition between hard surfaces /
Transición entre superficies duras

AVAILABLE SHAPES / FORMAS DISPONIBLES

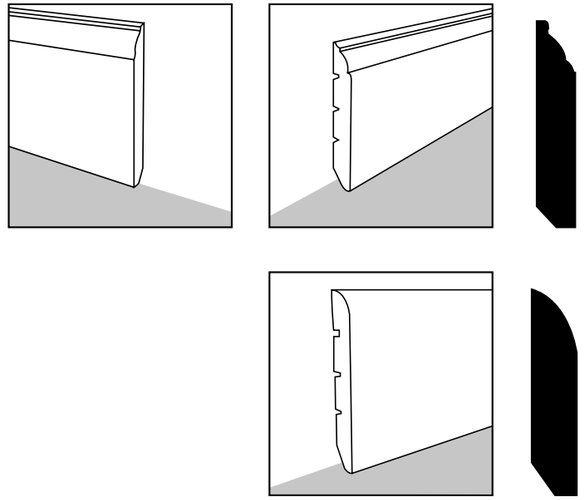

Skirting

Available size is 2400 x 60/80 x 12/15mm and has a 0,12mm wear layer. The skirting board is available in different finishes and shapes, adapting to all tastes and needs.

Rodapié

El tamaño disponible es 2400 x 60/80 x 12/15mm y dispone de una capa de desgaste de 0,12mm. El rodapié está disponible en diferentes acabados y formas adaptándose a todos los gustos y necesidades.

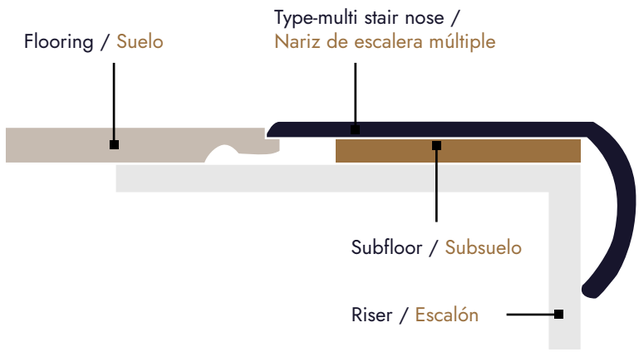

Type-multi stair nose

Composed of a 0,12mm wear layer and a flooring thickness matching of 3-12mm.
Available size is 2400x50x26/40 mm.
Combines the edges as a continuation of flooring and the other materials. Matching all size of flooring by adjusting the sub-floor thickness.

Nariz de escalera múltiple

Compuesto por una capa de desgaste de 0,12 mm y un espesor de suelo de 3 a 12 mm.
El tamaño disponible es de 2400x50x26/40 mm.
Combina los cantos como continuación del pavimento y los demás materiales. Coincide con todos los tamaños de suelo ajustando el espesor del subsuelo.

AVAILABLE FINISHES / ACABADOS DISPONIBLES

Floor & skirting with same colour/
Suelo y rodapié del mismo color

Skirting painted the same colour as the wall/
Rodapié pintado del mismo color que la pared

Aluminium skirting, available in 5 colours/
Rodapié de aluminio, disponible en 5 colores

COORDINATING TRIMS

MOLDURAS DE COORDINACIÓN

Installation preview

We show you how our types of moldings are placed in a simple way.

Instalación previa

Te mostramos como se colocan nuestros tipos de molduras de forma sencilla.



T-MOLDING
MOLDURA EN T



REDUCER
REDUCTOR



END-CAP
TAPA FINAL



STAIR NOSE
NARIZ DE ESCALERA



SCOTIA



QUARTER ROUND
CUARTO BOCEL



SKIRTING
RODAPIÉ



FLUSH STAIR NOSE
NARIZ DE ESCALERA A RAS



SQUARE FLUSH STAIR NOSE
NARIZ DE ESCALERA CUADRADA A RAS



SQUARE FLUSH STAIR TREAD
PISADA DE ESCALERA CUADRADA A RAS



TRACK
CARRIL

MAINTENANCE

MANTENIMIENTO

· Cover floor with heavy paper or cardboard following installation, to protect the floor from other trade work. Do not use plastic film or any type of non-ventilated material.

· Although Scelavi Sintered Core flooring is 100% waterproof, it is best practice to clean up spills immediately. Routinely vacuum, sweep, and/or dust floors using standard cleaning equipment. DO NOT use treated dust mops. For heavier cleaning, use a damp mop with clean water and a neutral PH cleaner. DO NOT use harsh detergents or chemicals on your Scelavi Sintered Core flooring. Oil and petroleum-based products can result in surface staining. DO NOT use abrasive scrubbing tools nor vacuums with a beater bar. DO NOT use electric brooms with hard plastic bottoms without padding.

· Protect your floor surface — close blinds or drapes during peak sunlight hours. Excessive heat and light will subject flooring to fading and other unwanted effects: place non-staining, breathable mats at all entrances to keep dirt and debris off the flooring. DO NOT use rubber mats as they may stain the flooring. Use floor protectors for furniture. Non-staining felt pads could be used provided they are changed regularly to prevent dirt, debris, and sand buildup. Wide, non-staining castors at least 5mm in diameter or floor protectors should be used on rolling furniture such as office chairs, dining chairs, armchairs, etc. To prevent point loads on heavy furniture, use non-staining surface floor protectors. Do not use ball type castors as they can damage the flooring.

· When moving heavy furniture or appliances, place a sheet of Masonite or plywood underneath to distribute the weight and reduce denting or scratching. For lighter pieces, use a clean blanket or a piece of carpet face down under the article to be moved.

· Be aware of sharp edges as they can scratch and gouge the flooring surface.

Please contact tour dealer/distributor with additional questions and/or concerns.

· Cubra el suelo con papel grueso o cartón después de la instalación, para así, proteger el suelo de otros posibles trabajos. No use película plástica, ni ningún tipo de material no ventilado.

· Aunque el suelo Sintered Core de Scelavi es 100% impermeable, es una buena práctica limpiar los liquidos de inmediato. Aspirar, barrer y/o limpiar el polvo con equipos de limpieza estándar. NO use mopa/paño tratados para limpiar el polvo. Para una limpieza más profunda, use una mopa/paño húmedo con agua limpia y/o un jabón de pH neutro. NO use detergentes agresivos o productos químicos en su suelo Sintered Core de Scelavi. El petróleo y los productos derivados del petróleo pueden provocar manchas en la superficie. NO use herramientas de limpieza abrasivas ni aspiradoras con elementos que golpee el suelo. NO use escobas eléctricas con guías de plástico duro sin acolchado.

· Proteja la superficie de su suelo; cierre las persianas o cortinas durante las horas punta de luz solar. El calor y la luz excesiva someterán el suelo a la decoloración y otros efectos no deseados; coloque alfombras transpirables anti-manchas en todas las entradas, para mantener la suciedad y los escombros lejos del suelo. NO use alfombrillas de goma ya que pueden manchar el suelo. Use protectores de suelo para muebles. Se podrá usar almohadillas de fieltro que no manchen, siempre que se cambien regularmente para evitar la acumulación de suciedad, escombros y/o arena. Para mover muebles debe usar protectores de suelo, de al menos 5mm de diámetro, también con muebles como sillas de oficina, sillas de comedor, sillones, etc. Para evitar marcas en el suelo de muebles pesados, use protectores de suelo de superficie que no manchen.

· Cuando mueva muebles o electrodomésticos pesados, coloque una lámina de Masonite o madera contrachapada debajo para distribuir el peso y reducir las abolladuras o arañazos. Para piezas más ligeras, use una manta limpia o un pedazo de alfombra boca abajo debajo del artículo para mover.

· Tenga cuidado con cuchillos, esquinas de muebles u otros utensilios con bordes afilados, ya que pueden rayar la superficie del suelo.

Póngase en contacto con nuestro distribuidor/tienda con preguntas y / o inquietudes adicionales.

INSTALLATION GUIDE

GUÍA DE INSTALACIÓN

INSTALLATION GUIDELINES FOR INSTALLERS (FLOATING "CLICK TOGETHER" FLOORS)

These installation guidelines are for SPC Luxury Vinyl products as produced and marketed under Scelavi. The following general comments are applicable to the installation of these products:
· Best installation practices recommend that the product be acclimated at jobsite to the intended occupied service temperature , generally between 65-85 degrees F.
· These products are recommended for interior installations only. Installer must allow for no less than 3/8" for expansion around the perimeter of the room and around all stationary cabinets, kitchen islands, etc. Never install under stationary cabinets, kitchen islands, etc.
· Flooring should be protected from direct exposure to sunlight.
· Mix and install product from several different cartons to achieve desired product variation.
· · All sub-floor underlayment patching must be done with a non-shrinking, water resistant, high quality cement patching compound. Do not install over gypsum based patching and/or leveling compounds.
· Areas to receive flooring should be adequately lighted during all phased of installation.
· Flooring should be securely transported and stored in neatly stacked fashion on an interior surface that is smooth, flat, and dry. All boxes should be laid flat. Never stack on either long or short sides as this may break the click profile.

SUBFLOOR PREPARATION

· Careful and correct preparation of the sub-floor is a critical part of a satisfactory installation.
· All subfloors should be flat to within 1/8" in 6 feet and 3/16" in 10 feet.
· Never install flooring over residential asphalt-type (cut back) adhesive. Residential adhesive should be completely removed or covered with suitable underlayment.

A/ CONCRETE SUBFLOORS

· Concrete sub-floors must be dry, smooth, and free from dust, solvent, paint, wax grease, oil, asphalt sealing compounds and other extraneous materials. The surface must be hard, dense, and free from powder or flaking.
· New concrete subfloors must be thoroughly dry (at least 6 weeks) and completely cured.
· All concrete slabs must be checked for moisture before installing material. The final responsibility for determining if the concrete is dry enough lies with the floor covering installer. Product must never be installed where excessive moisture emissions may exist. In accordance with ASTM F1869 moisture emission from sub-floor cannot exceed 8 lbs MVER (moisture vapor emission rate) per 1,000 square feet per 24 hours as measured with the calcium chloride test or ASTM F1270 In-situ Relative Humidity Test not to exceed 90% per 1000 sf in 24 hours. pH level of concrete should be 7-10. Scelavi will not assume responsibility for floor covering failure due to hydrostatic pressure or excessive moisture vapor emission. Although the SPC Luxury Vinyl products are not susceptible to damage by moisture, excessive sub-floor moisture can be a breeding ground for mold, mildew, and fungus, all of which can contribute to an unhealthy indoor environment. Floors where excessive moisture levels exists, or where no moisture level testing has been performed, will require the addition of a 6mil polyethylene moisture barrier. When a moisture barrier is installed, note that all seams are to have an 8" overlap taped with a waterproof adhesive tape such as duct tape. Vapor barriers must be installed at least 1" up the wall.
· Holes, grooves, expansion joints and others depressions must be filled with a high quality cementitious patching and leveling compound, troweled smooth and feathered even with the surrounding surface.
· Concrete floors with hydronic radiant heating systems are satisfactory, providing the temperature of the floor does not exceed 85 degrees F at any time. Before installing the flooring, the heating system should be turned on to eliminate residual moisture. Do not use heated floor mate systems under Scelavi SPC Luxury Vinyl products.

B/ WOOD SUBFLOORS

· All wood sub-floors must be suspended a minimum of 18" above the ground. It is important to provide adequate cross-ventilation. Cover the surface of a crawl space with a suitable vapor barrier.
· Floating, (click together) flooring can be installed over many wood substrates that are not suitable for products that include total adhesive. These woos substrates include particle board, chipboard, and flake board… provided they are smooth, flat, structurally sound and free of deflection.

C/ EXISTING FLOOR COVERINGS

· SPC Luxury Vinyl floors by Scelavi can be installed over most existing hard-surface floor coverings, provided that the existing floor is well bonded and the surface is flat and smooth.
· Ceramic tile unevenness should be corrected by applying an overlay such as cementitious patching or leveling compound.
· Existing floors should not be cushioned and not exceed one layer in thickness.
· Never install over carpet.
· Floor should be flat, smooth, and dimensionally sound and free from deflection.

INSTALLATION - FLOATING "CLICK TOGETHER" FLOORS

· Do not secure the planks to the floor.
· Always undercut wood door jams. Check local building codes for metal door jams. If they cannot be undercut, the proper expansion must be maintained around door jam.
· Never install kitchen cabinets or kitchen islands on top of Scelavi "click-together" flooring.
· Use care when installing wall moldings or transition strips to not fasten through the flooring.

GENERAL UNDERSTANDING - FLOATING "CLICK TOGETHER" FLOORS

Floating "click together" floors, such as those marketed by Scelavi, are the perfect solution to making old spaces new again. It should be understood and recognized that these floating floors require space to expand and contract with the movement of the structure. This movement must be considered throughout the planning and installation phases of any project. Small, independent areas will move adequately if standard installation techniques are applied. In larger areas, careful consideration must be given to the separation of the spaces with transition pieces to allow separate suitable movement of these spaces. Movement will occur and planning for this movement should be considered. Failure to plan for movement is not a failure of the Scelavi product.

PASOS DE INSTALACIÓN PARA INSTALADORES (SUELOS FLOTANTES CON CLIC)

Estas directrices de instalación son para los productos SPC Luxury Vinyl tal y como se fabrican y comercializan en Scelavi. Los siguientes comentarios generales son aplicables a la instalación de estos productos:
· Las mejores prácticas de instalación recomiendan que el producto se aclimate en el lugar de trabajo a la temperatura de servicio ocupada prevista, generalmente entre 65-85 grados F.
· Estos productos se recomiendan únicamente para instalaciones interiores. El instalador debe dejar un margen de dilatación no inferior a 3/8" alrededor del perímetro de la habitación y alrededor de todos los armarios fijos, islas de cocina, etc. No instale nunca debajo de armarios fijos, islas de cocina, etc.
· El suelo debe protegerse de la exposición directa a la luz solar.
· Mezcle e instale el producto de varios cartones diferentes para conseguir la variación de producto deseada.
· Todos los remiendos del contrapiso deben realizarse con un compuesto de remiendo de cemento de alta calidad, resistente al agua y que no se contraiga. No lo instale sobre compuestos de parcheo y/o nivelación a base de yeso.
· Las zonas que vayan a recibir el pavimento deben estar adecuadamente iluminadas durante todas las fases de la instalación.
· El pavimento debe transportarse y almacenarse de forma segura y bien apilado sobre una superficie interior lisa, plana y seca. Todas las cajas deben colocarse planas. No apilar nunca por el lado largo ni por el corto, ya que se podría romper el perfil de clic.

PREPARACIÓN DEL SUBSUELO

· La preparación cuidadosa y correcta del subsuelo es una parte crítica de una instalación satisfactoria.
· Todos los subsuelos deben estar planos hasta 1/8" en 6 pies y 3/16" en 10 pies.
· Nunca instale el suelo sobre adhesivo asfáltico residencial (recortado). El adhesivo residencial debe retirarse completamente o cubrirse con un contrapiso adecuado.

A/ SUBSUELOS DE HORMIGÓN

· Los subsuelos de hormigón deben estar secos, lisos y libres de polvo, disolvente, pintura, cera, grasa, aceite, compuestos de sellado asfáltico y otros materiales extraños. La superficie debe ser dura, densa y estar libre de polvo o escamas.
· Los subsuelos de hormigón nuevos deben estar completamente secos (al menos 6 semanas) y curados.
· Debe comprobarse la humedad de todas las losas de hormigón antes de instalar el material. La responsabilidad final de determinar si el hormigón está suficientemente seco recae en el instalador del revestimiento de suelo. El producto no debe instalarse nunca donde puedan existir emisiones excesivas de humedad. De acuerdo con la norma ASTM F1869, la emisión de humedad del subsuelo no puede superar las 8 libras de MVER (índice de emisión de vapor de humedad) por cada 1.000 pies cuadrados en 24 horas, medido con la prueba de cloruro de calcio, o la prueba de humedad relativa in situ ASTM F1270, que no debe superar el 90% por cada 1.000 pies cuadrados en 24 horas. El nivel de pH del hormigón debe ser de 7-10. Scelavi no asumirá ninguna responsabilidad por fallos en el revestimiento del suelo debidos a la presión hidrostática o a una emisión excesiva de vapor de humedad. Aunque los productos SPC Luxury Vinyl no son susceptibles de sufrir daños por la humedad, la humedad excesiva del subsuelo puede ser un caldo de cultivo para la aparición de moho y hongos, todo lo cual puede contribuir a crear un ambiente interior insalubre. Los suelos en los que existan niveles excesivos de humedad, o en los que no se hayan realizado pruebas de nivel de humedad, requerirán la adición de una barrera antihumedad de polietileno de 6 milímetros. Cuando se instale una barrera contra la humedad, tenga en cuenta que todas las juntas deben tener un solapamiento de 8" encintadas con una cinta adhesiva impermeable como la cinta aislante. Las barreras de vapor deben instalarse al menos 1" por encima de la pared.
· Los agujeros, ranuras, juntas de dilatación y otras depresiones deben rellenarse con un compuesto de parcheo y nivelación cementoso de alta calidad, alisado con llana y emplumado incluso con la superficie circundante.
· Los suelos de hormigón con sistemas de calefacción radiante hidrónica son satisfactorios, siempre que la temperatura del suelo no supere los 85 grados F en ningún momento. Antes de instalar el suelo, debe encenderse el sistema de calefacción para eliminar la humedad residual. No utilice sistemas de calefacción radiante bajo los productos Scelavi SPC Luxury Vinyl.

B/ SUBSUELOS DE MADERA

· Todos los subsuelos de madera deben estar suspendidos un mínimo de 18" por encima del suelo. Es importante proporcionar una ventilación cruzada adecuada. Cubra la superficie de un semisótano con una barrera de vapor adecuada.
· Los suelos flotantes (click together) pueden instalarse sobre muchos sustratos de madera que no son adecuados para productos que incluyen adhesivo total. Entre estos sustratos se incluyen los tableros de partículas, los tableros aglomerados y los tableros de escamas, siempre que sean lisos, planos, estructuralmente sólidos y no presenten desviaciones.

C/ REVESTIMIENTOS DE SUELO EXISTENTES

· Los suelos SPC Luxury Vinyl de Scelavi pueden instalarse sobre la mayoría de los revestimientos de suelo de superficie dura existentes, siempre que el suelo existente esté bien adherido y la superficie sea plana y lisa.
· Los desniveles de las baldosas cerámicas deben corregirse aplicando una capa de parcheo cementoso o un compuesto nivelador.
· Los suelos existentes no deben estar acolchados ni tener más de una capa de grosor.
· Nunca instale sobre moqueta.
· El suelo debe ser plano, liso, de dimensiones firmes y sin desviaciones.

INSTALACIÓN - SUELOS FLOTANTES "CLICK TOGETHER"

· No fije las planchas al suelo.
· Corte siempre por debajo de las jambas de madera. Compruebe los códigos locales de construcción para puertas metálicas. Si no se pueden rebajar, se debe mantener la dilatación adecuada alrededor de la jamba de la puerta.
· No instale nunca armarios de cocina o islas de cocina encima de los suelos "click-together" de Scelavi.
· Tenga cuidado al instalar molduras de pared o tiras de transición para que no se sujeten a través del suelo.

ENTENDIMIENTO GENERAL - SUELOS FLOTANTES "CLICK TOGETHER

Los suelos flotantes "click together", como los comercializados por Scelavi, son la solución perfecta para renovar espacios antiguos. Debe entenderse y reconocerse que estos suelos flotantes requieren espacio para expandirse y contraerse con el movimiento de la estructura. Este movimiento debe tenerse en cuenta en todas las fases de planificación e instalación de cualquier proyecto. Las zonas pequeñas e independientes se moverán adecuadamente si se aplican las técnicas de instalación estándar. En áreas más grandes, se debe considerar cuidadosamente la separación de los espacios con piezas de transición para permitir un movimiento adecuado separado de estos espacios. El movimiento se producirá y debe tenerse en cuenta la planificación de este movimiento. No planificar el movimiento no es un fallo del producto Scelavi.

INSTALLATION GUIDE

Below we show you the correct process for placing our products.

1. SPC INSTALLATION WITH CLICK SYSTEM

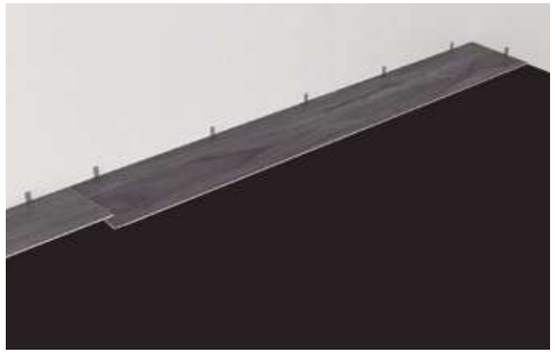

Step 1: First plank, first row. Place a spacer of 3/8'' (9,525mm) thickness to the left and position the plank against the wall.

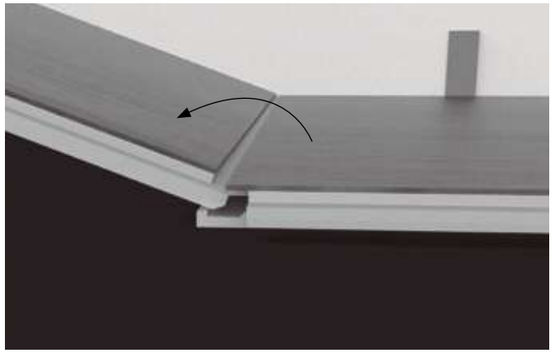

Step 2: Second plank, first row.Place this plank gently and tight to the short end of the first one.

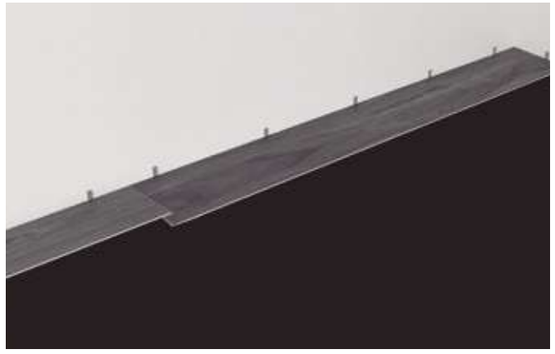

Step 3: Fold the panel down in a single action movement. Afterwards press down or slightly tap down at the short end just installed till it clicks.

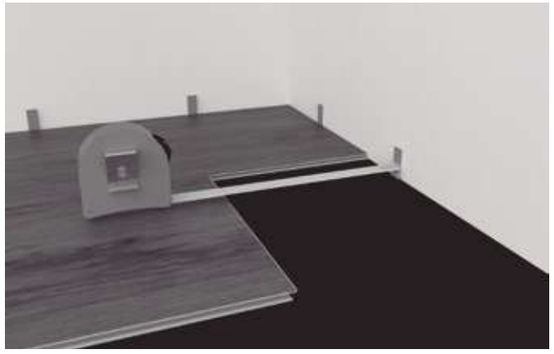

Step 4: At the end of the first row, put a spacer 3/8'' (9,525mm) to the wall and measure the length of the last plank to fit.

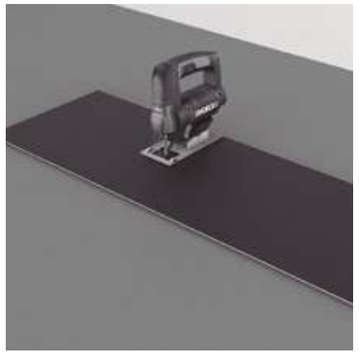

Step 5: Cut with a jig saw, hand saw, chop saw or guillotine cutter. Then snap the flooring - similar to scoring and snapping drywall.

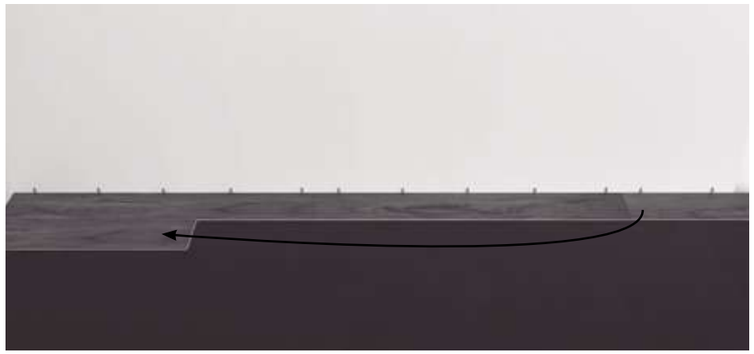

Step 6: Starting the second row the first plank should be a min length of 10'' (254mm). Put a 3/8 (9,525mm) spacer against the wall and measure the last piece. If it is shorter than 10'' (254mm) a new starter piece should be used. Insert at an angle into the previous row and tap (on the long side) it in using a tapping block till flat.

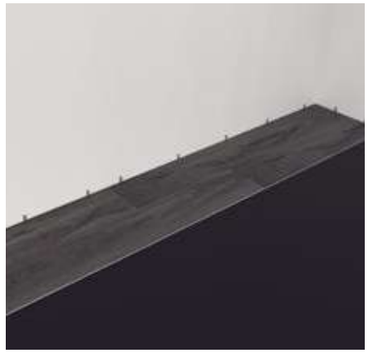

Step 7: Minimum distance between short ends of planks in parallel rows should not be less than 6'' (152,4cm).

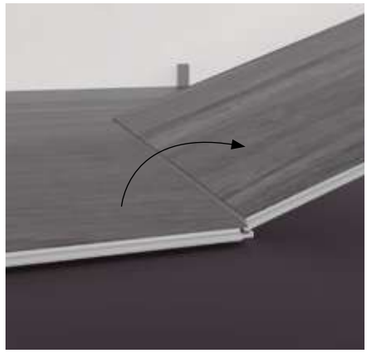

Step 8a: Second plank, second row. Place the panel at an angle into the groove of the previous row making sure that the end of the panel is tight/flush to the short end of the previous panel.

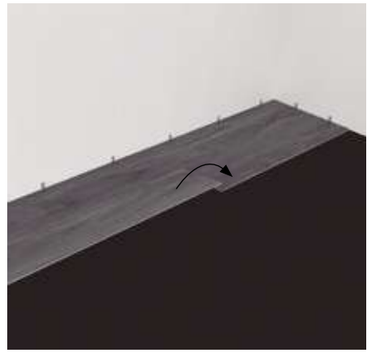

Step 8b: Fold the panel down in a single action movement with a slight press to the left to the short end of the previous panel. Again, using the tapping block tap it against the long end into the previous row.

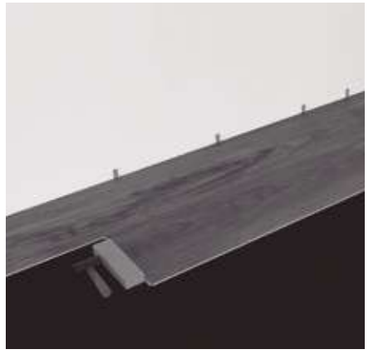

Step 8c: The product is properly locked when the two boards are flush across the top. Finish installing this plank tapping it with a tapping block on the long side to ensure secure installation.

Step 9: After 2-3 rows. Adjust the distance to the front wall by placing spacers 3/8" (9,525mm) on the side walls and the end wall. Once the adjustment is done against the main wall, continue to install till the last row.

Step 10: Last row. The Minimum width of the last plank should be NOT LESS than 2" wide. Put a spacer before measuring Cut the panels lengthwise and glue the short ends.

GUÍA DE INSTALACIÓN

A continuación les mostramos el correcto proceso de colocación de nuestros productos.

1. INSTALACIÓN SPC MEDIANTE CLIC

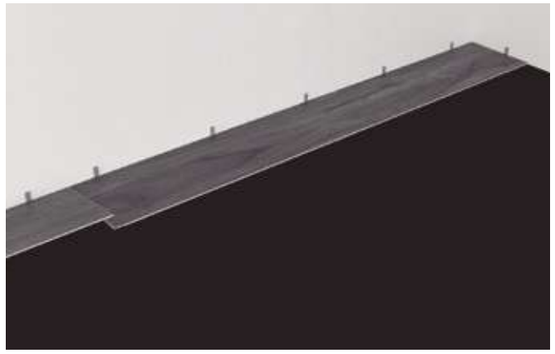

Paso 1: Primer tablón, primera fila. Coloque un espaciador de 3/8" (9,525mm) de grosor a la izquierda y coloque la tabla contra la pared.

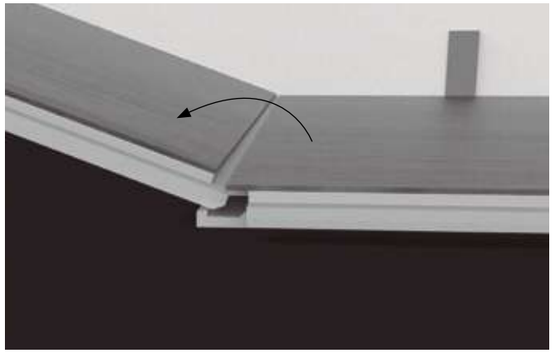

Paso 2: Segunda tabla, primera fila. Coloque esta tabla suavemente y apretada en el extremo corto de la primera.

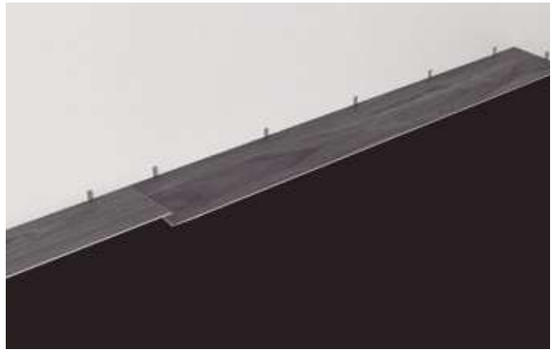

Paso 3: Dobla el panel hacia abajo en un solo movimiento de acción. Luego presione hacia abajo o toque ligeramente hacia abajo en el extremo corto que acaba de instalar hasta que haga clic..

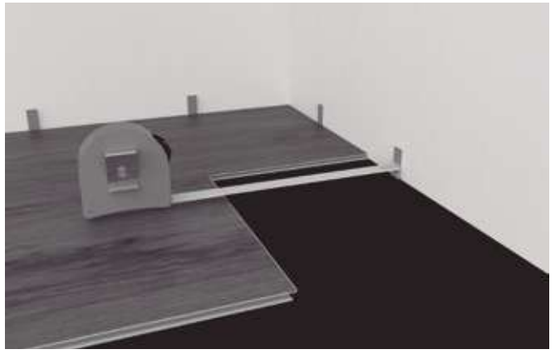

Paso 4: Al final de la primera fila, coloque un sspaciador de 3/8'' (9,525 mm) en la pared y mida la longitud del último tablón para que encaje.

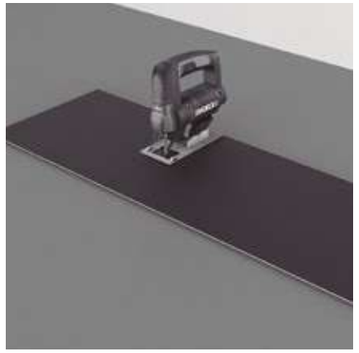

Paso 5: Corte con una sierra de calar, sierra de mano, sierra de corte o cortador de guillotina. Luego, rompa el piso, de manera similar a los paneles de yeso.

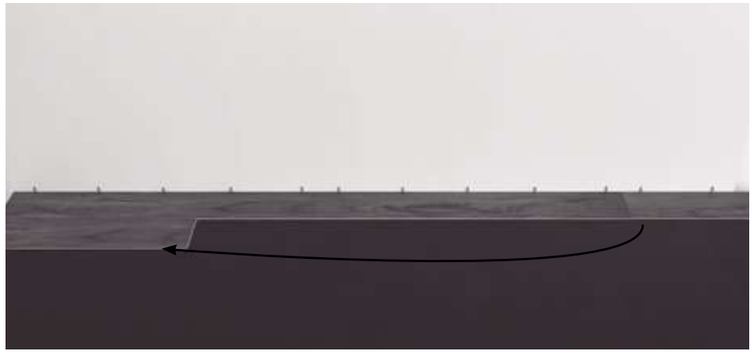

Paso 6: Comenzando la segunda fila, la primera tabla debe tener una longitud mínima de 10'' (254 mm). Coloque un espaciador de 3/8" (9,525 mm) contra la pared y mida la última pieza. Si es más corto que 10'' (254 mm), se debe usar una nueva pieza de arranque. Inserte en ángulo en la fila anterior y tóquelo (en el lado largo) con un bloque de golpeo hasta que quede plano.

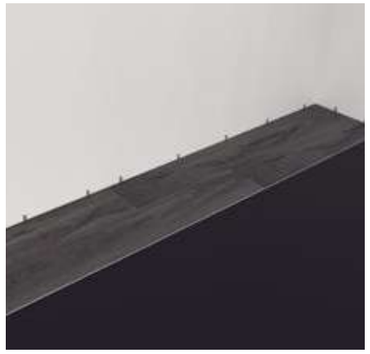

Paso 7: La distancia mínima entre los extremos cortos de las tablas en filas paralelas no debe ser inferior a 6" (152,4 mm).

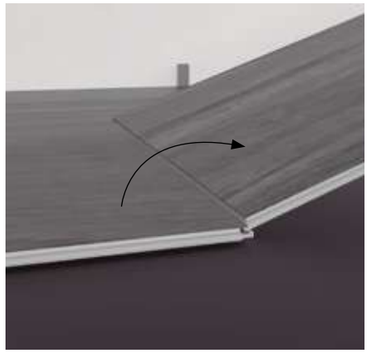

Paso 8a: Segunda tabla, segunda fila. Coloque el panel en ángulo en la ranura de la fila anterior asegurándose de que el extremo del panel esté apretado / alineado con el extremo corto del panel anterior.

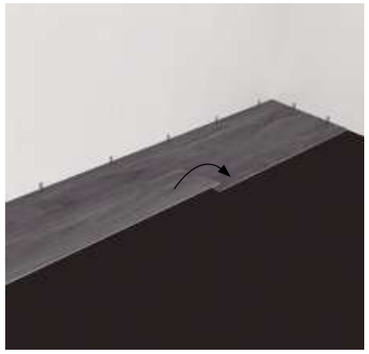

Paso 8b: Dobla el panel hacia abajo en un solo movimiento de acción con una ligera presión hacia la izquierda hasta el extremo corto del panel anterior. Nuevamente, usando el bloque de tapping tóquelo contra el extremo largo en la fila anterior.

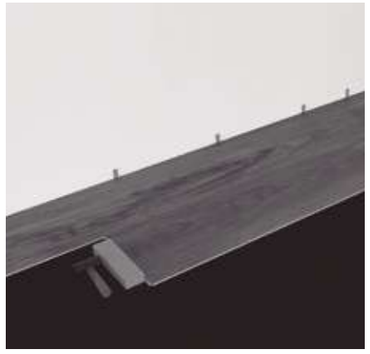

Paso 8c: El producto está correctamente bloqueado cuando las dos tablas están al ras en la parte superior. Termine de instalar este tablón golpeándolo con un bloque de golpeteo en el lado largo para garantizar una instalación segura.

Paso 9: Después de 2-3 filas. Ajuste la distancia a la pared frontal colocando espaciadores de 3/8" (9,525 mm) en las paredes laterales y la pared del extremo. Una vez que el ajuste se realiza contra la pared principal, continúe instalando hasta la última fila.

Paso 10: Última fila. El ancho mínimo de la última tabla no debe ser MENOR de 2" de ancho. Coloque un separador antes de medir. Corte los paneles a lo largo y pegue los extremos cortos..

WARRANTY:

LIMITED LIFETIME RESIDENTIAL WARRANTY

Scelavi warrants that this product:
1- Will not wear through, where "wear through" means the complete loss of wear layer so that the printed pattern changes over a minimum of 3% of the total installation.
2- Will not be damaged by normal residential household moisture on the surface of the floor.
3- Will be free from manufacturing defects.

This limited lifetime warranty is subject to the following conditions:
1- The floor must be installed properly following Scelavi installation guidelines.
2- The floor must be maintained in accordance with Scelavi maintenance guidelines.
3- The floor must be installed only in interior applications in climate-controlled areas.
4- The material must be checked carefully for defects before and during installation and under sufficient lighting. Once installed, the floor is considered as non-defective. Products with visible defects should not be installed under any circumstance.

This limited lifetime warranty is subject to the following exclusions:
· The warranty is not transferable.
· Only 1st quality goods. 2nds or "off-goods" do not qualify.
· Open joints of 0.2mm or less are not considered a defect under warranty. Joints compromised by improper installation, lack of continuous climate control, or obstructions creating "pinch points" are expressly not covered by the warranty.
· Conditions or defects caused by the use of improper adhesives, inadequate sub-flooring, or improper subfloor preparation are not covered by the warranty.
· Scelavi flooring that has been subject to abnormal use or conditions, or subject to abuse in any way will not be covered. If Scelavi products are not acclimated to room temperature (between 65-85 degrees F) at job site between 24-48 hours before installation…and if these temperatures are not continuously maintained post-installation, product failure will not be covered by the warranty.
"Abnormal use or conditions" includes, but is not limited to, damage from plumbing/appliance leaks, storm or flood, damage from smoke, fire, or other casualty events, damage caused by negligence or improper alterations of the original manufactured product. "Abuse" is any use of the flooring that is unreasonable considering the typical and expected uses of Scelavi products in a residential or light commercial environment. The feet of furniture must always be covered with appropriate protective material. Chairs, sofas, or other furniture with castors must be fitted with soft rubber wheels and have an adequate protective mat or protective castor cups.
· The warranty excludes water damage to furniture, fixtures, walls, subfloors, moldings, trims, underlayment, radiant heating elements, or anything not related to the Scelavi flooring. Any damage resulting from mold and mildew growth is not covered by the warranty.
· Any staining resulting from urine, feces, or vomit from anything other than a domestic pet is not covered under this warranty.
· This warranty excludes damage caused by hydrostatic pressure (water or moisture under the floor that is transmitted to the surface through exerted pressure) or other conditions that result in water under the floor.
· Not covered under this warranty are conditions caused by improper use or maintenance such as:
1- Lack of gloss or increasing dullness due to lack of maintenance or improper maintenance.
2- Damage due to adhesive tape, scuffs, scratches, dents, and cuts.
3- Damages or discoloration from carpet dyes, fertilizers, or other chemicals.
4- Staining from the use of mats not labeled non-staining.
5- Damage caused by burns, flooding, fires, and other accidents.
6- Damage caused by abuse (i.e., dragging heavy or sharp objects across the floor without proper protection).
7- Damage caused by castor wheels or vacuum cleaner beater bars.
8- Failure to support furniture with floor protectors made of non-staining felt or non-pigmented hard plastic. Protectors must be the same diameter as the object and rest on the floor.
9- Pet damage, such as chewing, digging, clawing, etc.

· Discoloration from heat or sunlight is not covered under warranty.
· Variations of color, shade, or texture of the product purchased from those shown in samples, photographs, or literature are not covered by this warranty.
· Any liability for loss of profits or any other indirect, special, or consequential damage is excluded under warranty.

All claims should be filed with selling retailer or distributor and accompanied by proof of purchase along with proof of proper installation and product maintenance. The following remedies are available to you if the floor fails to perform according to the warranty:
1- During the first year following installation, Scelavi will at its option (i) repair the floor to conform to the warranty or (ii) replace without charge the affected area with another floor of equal value and quality. If the floor was professionally installed by a flooring contractor originally, Scelavi will also pay reasonable labor costs.
2- During the second year, Scelavi will, at its option (i) repair the floor to conform to the warranty or (ii) provide a credit note for 90% of the original purchase price for materials and 90% of the original labor charges.
3- During the third year, Scelavi will at its option (i) repair the floor to conform to the warranty or (ii) provide a credit note for 80% of the original purchase price for materials and 80% of the original purchase price for materials and 80% of the original labor charges.
4- After the third year, Scelavi will at its option (i) repair the floor to conform to the warranty or (ii) provide a credit note for material only (no labor) based on the following schedule:
· During the fourth year 70% credit.
· During the fifth year 60% credit.
· During the sixth year 50% credit.
· During the seventh year 40% credit.
· During the eighth year 30% credit.
· During the ninth year 20% credit.
· After the ninth year 10% credit.

WARRANTY:

10-YEARS LIMITED COMMERCIAL WARRANTY

The vinyl layer of the Scelavi product is warranted by Scelavi not to wear through under normal and reasonable commercial use for a period of 10 years from the date of purchase, Wear-through means the complete loss of wear layer so that the printed pattern changes over a minimum of 3% of the total installation. This commercial warranty covers only those products deemed acceptable in light and medium commercial installations such as the following:

· Hotels: Guest Rooms, Conference/Meeting Rooms, Lobby Areas (walk-off mats required).
· Institutional: Classrooms, Training Rooms, Meeting Rooms, Common Areas, Residential Halls, Hallways.
· Medical Offices: Waiting Rooms, Patient Rooms, Examination Rooms, Storage Rooms, Hallways, Entryways (walk-off mats required).
· Offices and Restaurants: Offices, Conference/Meeting Rooms, Showrooms, Restaurant Floor, Break Rooms.
· Retail: Novelty Shops/Boutiques, Product Display Areas, Sales Floors, Showrooms, Hair Salons, Hallways, Entryways (walk-off mats required).

The ten-year limited Commercial Warranty is made subject to the following conditions:

1- The vinyl wear layer is a minimum of 20 mil thickness.
2- The floor must be installed correctly and following Scelavi installation guidelines.
3- If glue down installation is used, use only glue warrantied by the glue manufacturer as acceptable for the installation being completed. Using incorrect glue will void this warranty. The glue-down method must be used if the flooring is exposed to temperatures above 140 degrees F or below 32 degrees F.
4- The flooring must be used only indoors in a climate-controlled area.
5- The flooring must be maintained in accordance with Scelavi maintenance guidelines.
6- The flooring must be checked carefully for defects before and during installation and under sufficient lighting. Once installed, the floor will be considered as non-defective. Products with visible defects should not be installed under any circumstances.

The ten-year limited Commercial Warranty is subject to the following exclusions:

· The warranty is not transferable and applies only to the original purchaser.
· Only 1st quality goods. 2nds or "off-goods" do not qualify.
· Open joints of 0.2mm or less are not considered a defect under warranty. Joints compromised by improper installation, lack of continuous climate control, or obstructions creating "pinch points" are expressly not covered by this warranty.
· Conditions or defects caused by the use of improper adhesives, inadequate sub-flooring, or improper subfloor preparation are not covered by the warranty.
· Scelavi flooring that has been subject to abnormal use or conditions, or subject to abuse in any way is not covered. If Scelavi products are not acclimated to room temperature (between 65-85 degrees F) at job site between 24-48 hours before installation...and if these temperatures are not continuously maintained post-installation, product failure will not be covered by the warranty.
"Abnormal use or conditions" includes, but is not limited to, damage from plumbing/appliance leaks, storm or flood, damage from smoke, fire, burns, or other casualty events, damage caused by negligence or improper alterations of the original manufactured product. "Abuse" is any use of the flooring that is unreasonable considering the typical and expected uses of Scelavi products in a commercial environment. These include, but are not limited to, cracking, warping, soiling, fading, denting, and punctures caused by items such as roller skates, golf shoes, or pets. The feet of furniture must always be covered with appropriate protective material. Chairs, sofas, or other furniture with castors must be fitted with soft rubber wheels and have an adequate protective mat or protective castor cups.
· The warranty excludes water damage to furniture, fixtures, walls, subfloors, moldings, trims, underlayment, radiant heating elements, or anything not related to the Scelavi flooring. Any damage resulting from mold and mildew growth is not covered by the warranty.
· Any staining resulting from urine, feces, or vomit from anything other than a domestic pet is not covered under this warranty.
· This warranty excludes damage caused by hydrostatic pressure (water or moisture under the floor that is transmitted to the surface through exerted pressure) or other conditions that result in water under the floor.
· Not covered under this warranty are conditions caused by improper use or maintenance such as:
1- Gloss reduction, dullness, or surface scratches are not considered surface wear.
2- Damage due to adhesive tape, scuffs, scratches, dents, and cuts.
3- Damages or discoloration from carpet dyes, fertilizers, or other chemicals.
4- Staining from the use of mats not labeled non-staining.
5- Damage caused by burns, flooding, fires, and other accidents.
6- Damage caused by abuse (i.e., dragging heavy or sharp objects across the floor without proper protection).
7- Damage caused by castor wheels or vacuum cleaner beater bars.
8- Failure to support furniture with floor protectors made of non-staining felt or non-pigmented hard plastic. Protectors must be the same diameter as the object and rest on the floor.
9- Pet damage, such as chewing, digging, clawing, etc.
· Discoloration from heat or sunlight is not covered under warranty.
· Variations of color, shade, or texture of the product purchased from those shown in samples, photographs, or literature are not covered by this warranty.
· Any liability for loss of profits or any other indirect, special, or consequential damage is excluded under warranty.
· The manufacturer cannot guarantee that Scelavi product selected will match or coordinate with customer furnishings, trim, cabinetry, railings, etc.

All claims should be filed with selling retailer or distributor and accompanied by proof of purchase along with proof of proper installation and product maintenance. The following remedies are available to you if the floor fails to perform according to the warranty:

1- During the first year following installation, Scelavi will at its option (i) repair the floor to conform to the warranty or (ii) replace without charge the affected area with another floor of equal value and quality. If the floor was professionally installed by a flooring contractor originally, Scelavi will also pay reasonable labor costs.
2- During the second and third years, Scelavi will, at its option (i) repair the floor to conform to the warranty or (ii) provide a credit note for the original purchase price of the flooring, Scelavi will also pay 50% of reasonable labor charges.
3- During the fourth - tenth years, Scelavi will, at its option (i) repair the floor to conform to the warranty or (ii) provide a credit note for 50% of the original purchase price of the flooring. No labor charges will be paid.

WARRANTY:

6-YEARS COMMERCIAL WARRANTY 12MIL WEAR LAYER

The vinyl layer of the Scelavi product is warranted by Scelavi not to wear through under normal and reasonable light to medium commercial use for a period of 6 years from the date of purchase. Wear- through means the complete loss of wear layer so that the printed pattern changes over a minimum of 3% of the total installation. This commercial warranty covers only those products deemed acceptable in light and medium commercial installations such as the following:

· Hotels: Guest Rooms, Conference/Meeting Rooms, Lobby Areas (walk-off mats required).
· Institutional: Classrooms, Training Rooms, Meeting Rooms, Common Areas, Residential Halls, Hallways.
· Medical Offices: Waiting Rooms, Patient Rooms, Examination Rooms, Storage Rooms, Hallways, Entryways (walk-off mats required).
· Offices and Restaurants: Offices, Conference/Meeting Rooms, Showrooms, Restaurant Floor, Break Rooms.
· Retail: Novelty Shops/Boutiques, Product Display Areas, Sales Floors, Showrooms, Hair Salons, Hallways, Entryways (walk-off mats required).

The six-year limited light to medium Commercial Warranty is made subject to the following conditions:

· The vinyl wear layer is a minimum of 12 mil thickness.
· The floor must be installed correctly and following Scelavi installation guidelines.
· The flooring must be used only indoors in a climate-controlled area.
· The flooring must be maintained in accordance with Scelavi maintenance guidelines.
· The flooring must be checked carefully for defects before and during installation under sufficient lighting.

Once installed, the floor will be considered as non-defective. Products with visible defects should not be installed under any circumstances.

The six-year limited light to medium Commercial Warranty is subject to the following exclusions:

· The warranty is not transferable and applies only to the original purchaser.
· Only 1st quality goods. 2nds or "off-goods" do not qualify. Open joints of 0.008" or less are not considered a defect under warranty. Joints compromised by improper installation, lack of continuous climate control, or obstructions creating "pinch points" are expressly not covered by this warranty.
· Conditions or defects caused by the use of improper adhesives, inadequate sub-flooring, or improper subfloor preparation are not covered by the warranty.
· Scelavi flooring that has been subject to abnormal use or conditions, or subject to abuse in any way will not be covered. If Scelavi products are not properly acclimated per installation instructions, product failure will not be covered by the warranty.
"Abnormal use or conditions" includes, but is not limited to, damage from plumbing/appliance leaks, storm or flood, damage from smoke, fire, burns, or other casualty events, damage caused by negligence or improper alterations of the original manufactured product. "Abuse" is any use of the flooring that is unreasonable considering the typical and expected uses of Scelavi products in a commercial environment. These include, but are not limited to, cracking, warping, soiling, fading, denting, and punctures caused by items such as roller skates, golf shoes, or pets. The feet of furniture must always be covered with appropriate protective material. Chairs, sofas, or other furniture with castors must be fitted with soft rubber wheels and have an adequate protective mat or protective castor cups.
· The warranty excludes water damage to furniture, fixtures, walls, subfloors, moldings, trims, underlayment, radiant heating elements, or anything not related to the Scelavi flooring. Any damage resulting from mold and mildew growth is not covered by the warranty.
· Any staining resulting from urine, feces, or vomit from anything other than a domestic pet is not covered under this warranty.
· This warranty excludes damage caused by hydrostatic pressure (water or moisture under the floor that is transmitted to the surface through exerted pressure) or other conditions that result in water under the floor.
· Not covered under this warranty are conditions caused by improper use or maintenance such as:
  – Gloss reduction, dullness, or surface scratches are not considered surface wear.
  – Damage due to adhesive tape, scuffs, scratches, dents, and cuts.
  – Damages or discoloration from carpet dyes, fertilizers, or other chemicals.
  – Staining from the use of mats not labeled non-staining.
  – Damage caused by burns, flooding, fires, and other accidents.
  – Damage caused by abuse (i.e., dragging heavy or sharp objects across the floor without proper protection).
  – Damage caused by castor wheels or vacuum cleaner beater bars.
  – Failure to support furniture with floor protectors made of non-staining felt or non-pigmented hard plastic. Protectors must be the same diameter as the object and rest on the floor.
  – Pet damage, such as chewing, digging, clawing, etc.
· Discoloration from heat or sunlight is not covered under warranty.
· Variations of color, shade, or texture of the product purchased from those shown in samples, photographs, or literature are not covered by this warranty.
· Any liability for loss of profits or any other indirect, special, or consequential damage is excluded under warranty. The manufacturer cannot guarantee that Scelavi product selected will match or coordinate with customer furnishings, trim, cabinetry, railings, etc.

All claims should be filed with selling retailer or distributor and accompanied by proof of purchase along with proof of proper installation and product maintenance. The following remedies are available to you if the floor fails to perform according to the warranty:

· During the first year following installation, Scelavi will at its option (i) repair the floor to conform to the warranty or (ii) replace without charge the affected area with another floor of equal value and quality. If the floor was professionally installed by a flooring contractor originally, Scelavi will also pay reasonable labor costs.
· During the second and third years, Scelavi will, at its option (i) repair the floor to conform to the warranty or (ii) provide a credit note for the original purchase price of the flooring, Scelavi will also pay 50% of reasonable labor charges.
· During the fourth – sixth years, Scelavi will, at its option (i) repair the floor to conform to the warranty or (ii) provide a credit note for 50% of the original purchase price of the flooring. No labor charges will be paid.

GARANTÍAS:

GARANTÍA RESIDENCIAL LIMITADA DE POR VIDA

Scelavi garantiza que este producto:
1- No se desgastará, donde "desgastar" significa la pérdida completa de la capa de desgaste, de modo que el diseño impreso cambie en un mínimo del 3% de la instalación total.
2- No se dañará por la humedad normal del hogar residencial en la superficie del piso.
3- Estará libre de defectos de fabricación.

Esta garantía limitada de por vida está sujeta a las siguientes condiciones:
1- El piso debe instalarse correctamente siguiendo las pautas de instalación de Scelavi.
2- El piso debe mantenerse de acuerdo con las pautas de mantenimiento de Scelavi.
3- El piso debe instalarse solo en aplicaciones interiores en áreas con clima controlado.
4- El material debe verificarse cuidadosamente para detectar defectos antes y durante la instalación y con suficiente iluminación. Una vez instalado, el piso se considera no defectuoso. Los productos con defectos visibles no deben instalarse bajo ninguna circunstancia.

Esta garantía limitada de por vida está sujeta a las siguientes exclusiones:
· La garantía no es transferible.
· Solo productos de primera calidad. Segundas o productos en liquidación no califican.
· Las juntas abiertas de 0.2 mm o menos no se consideran un defecto bajo garantía. Las articulaciones comprometidas por una instalación incorrecta, la falta de control continuo del clima u obstrucciones que crean "puntas levantadas" no están cubiertas por la garantía
· Las condiciones o defectos causados por el uso de adhesivos inadecuados, el subsuelo inadecuado o la preparación inadecuada del subsuelo no están cubiertos por la garantía.
· Los pisos Finzzi que hayan estado sujetos a condiciones o usos anormales, o que estén sujetos a abuso de cualquier manera no estarán cubiertos. Si los productos Finzzi no se aclimatan a temperatura ambiente (entre 65-85 grados F) en el lugar de trabajo al menos 48 horas antes de la instalación ... y si estas temperaturas no se mantienen continuamente después de la instalación el defecto resultante del producto no estará cubierta por la garantía.
El "uso o condiciones anormales" incluye, entre otros, daños por fugas de plomería / electrodomésticos, tormentas o inundaciones, daños por humo, fuego u otros eventos fortuitos, daños causados por negligencia o alteraciones inadecuadas del producto original fabricado. "Abuso" es cualquier uso del piso que no sea razonable considerando los usos típicos y esperados de los productos Finzzi en un entorno residencial o comercial ligero. Las patas de los muebles siempre deben estar cubiertas con material protector adecuado. Las sillas, sofás u otros muebles con ruedas deben estar equipados con ruedas de goma blandas y tener una estera o alfombra protector adecuado o copas de ruedas protectoras.
· La garantía excluye daños causados por el agua en muebles, accesorios, paredes, subsuelos, molduras, molduras, contrapisos, elementos de calefacción radiante o cualquier cosa que no esté relacionada con el piso Finzzi.
Cualquier daño resultante del crecimiento de moho y hongos no está cubierto por la garantía.
· Cualquier mancha resultante de orina, heces o vómitos de otra cosa que no sea una mascota doméstica no está cubierta por esta garantía.
· Esta garantía excluye el daño causado por la presión hidrostática (agua o humedad debajo del piso que se transmite a la superficie a través de la presión ejercida) u otras condiciones que resulten en la acumulación de agua debajo del piso.

· No cubiertas por esta garantía son las condiciones causadas por el uso o mantenimiento incorrecto, tales como:
1- Disminución de brillo o aumento de la opacidad debido a la falta de mantenimiento o mantenimiento incorrecto.
2- Daño debido a cinta adhesiva, rasguños, abolladuras y cortes.
3- Daños o decoloración por uso de tintes de alfombra, fertilizantes u otros productos químicos.
4- Manchado por el uso de esteras o alfombras no etiquetados como no manchado.
5- Daños causados por quemaduras, inundaciones, incendios y otros accidentes
6- Daño causado por abuso (es decir, arrastrar objetos pesados o afilados por el piso sin la protección adecuada).
7- Daños causados por ruedas giratorias o barras batidoras de aspiradora.
8- No soportar muebles con protectores de piso hechos de fieltro no manchado o plástico duro no pigmentado. Los protectores deben tener el mismo diámetro que el objeto y descansar en el piso.
9- Daño a las mascotas, como masticar, cavar, arañar, etc.

· La decoloración por calor o luz solar no está cubierta por la garantía.
· Las variaciones de color, tono o textura del producto comprado de las que se muestran en muestras, fotografías o literatura no están cubiertas por esta garantía.
· Cualquier responsabilidad por pérdida de ganancias o cualquier otro daño indirecto, especial o consecuente está excluida de la garantía.

Todos los reclamos deben presentarse ante el vendedor minorista o distribuidor y deben acompañarse de un comprobante de compra junto con un comprobante de instalación y mantenimiento adecuados del producto. Las siguientes soluciones están disponibles si el piso no funciona de acuerdo con la garantía:
1- Durante el primer año posterior a la instalación, Scelavi, a su opción, puede elegir (i) reparará el piso para cumplir con la garantía o (ii) reemplazará sin cargo el área afectada con otro piso de igual valor y calidad. Si el piso fue instalado profesionalmente por un contratista de pisos originalmente, Scelavi también pagará costos laborales razonables, según precios del mercado.
2- Durante el segundo año, Scelavi, a su opción (i) reparará el piso para cumplir con la garantía o (ii) proporcionará una nota de crédito por el 90% del precio de compra original de los materiales y el 90% de la mano de obra original cargos.
3- Durante el tercer año, Scelavi a su opción (i) reparará el piso para cumplir con la garantía o (ii) proporcionará una nota de crédito por el 80% del precio de compra original de los materiales y el 80% del precio de compra original para materiales y 80% de los cargos laborales originales.
4- Después del tercer año, Scelavi, a su opción (i) reparará el piso para cumplir con la garantía o (ii) proporcionará una nota de crédito para el material únicamente (sin mano de obra) según el siguiente cronograma:
· Durante el cuarto año, 70% de crédito.
· Durante el quinto año 60% de crédito
· Durante el sexto año 50% de crédito
· Durante el séptimo año 40% de crédito.
· Durante el octavo año, 30% de crédito.
· Durante el noveno año 20% de crédito.
· Después del noveno año, 10% de crédito.

GARANTÍAS:

GARANTÍA COMERCIAL LIMITADA DE 10 AÑOS

La capa de vinilo del producto Finzzi está garantizada por Scelavi para que no se desgaste bajo un uso comercial normal y razonable durante un período de 10 años a partir de la fecha de compra, el desgaste significa la pérdida completa de la capa de desgaste para que el diseño impreso cambie sobre un mínimo del 3% de la instalación total. Esta garantía comercial cubre solo aquellos productos que se consideran aceptables en instalaciones comerciales ligeras y medianas como las siguientes:

· Hoteles: habitaciones, salas de conferencias / reuniones, áreas de lobby (se requieren alfombras de entrada).
· Institucional: aulas, salas de formación, salas de reuniones, zonas comunes, salas residenciales, pasillos.
· Consultorios médicos: salas de espera, salas de pacientes, salas de examen, salas de almacenamiento, pasillos, entradas (se requieren alfombras de entrada).
· Oficinas y restaurantes: oficinas, salas de conferencias / reuniones, salas de exposición, piso de restaurante, salas de descanso.
· Venta minorista: tiendas de novedades / boutiques, áreas de exhibición de productos, pisos de ventas, salas de exhibición, peluquerías, pasillos, Entradas (se requieren alfombras de entrada)

La garantía comercial limitada de diez años está sujeta a las siguientes condiciones:

1- La capa de desgaste de vinilo tiene un espesor mínimo de 0,3mm.
2- El piso debe instalarse correctamente y siguiendo las pautas de instalación de Scelavi.
3- Si se usa la instalación con pegamento, use solo el pegamento garantizado por el fabricante como aceptable para la instalación que se está completando. El uso de pegamento incorrecto anulará esta garantía. El método de pegado debe usarse si el piso está expuesto a temperaturas superiores a 140 grados F o inferiores a 32 grados F
4- El piso debe usarse solo en interiores en un área con clima controlado.
5- El piso debe mantenerse de acuerdo con las pautas de mantenimiento de Scelavi.
6- El piso debe revisarse cuidadosamente para detectar defectos antes y durante la instalación y con suficiente iluminación. Una vez instalado, el piso se considerará no defectuoso. Los productos con defectos visibles no deben instalarse bajo ninguna circunstancia.

La garantía comercial limitada de diez años está sujeta a las siguientes exclusiones:

· La garantía no es transferible y se aplica solo al comprador original.
· Solo productos de primera calidad. Segundas o productos en liquidación no califican.
· Las juntas abiertas de 0.2mm o menos no se consideran un defecto bajo garantía. Las juntas comprometidas por una instalación inadecuada, la falta de control de temperatura u obstrucciones que crean “puntas levantadas” no están expresamente cubiertas por esta garantía.
· Las condiciones o defectos causados por el uso de adhesivos inadecuados, el subsuelo inadecuado o la preparación inadecuada del subsuelo no están cubiertos por la garantía.
·Los pisos Finzzi que han estado sujetos a condiciones o usos anormales, o sujetos a abuso de cualquier manera no están cubiertos. Si los productos Finzzi no se aclimatan a temperatura ambiente (entre 65-85 grados F) en el lugar de trabajo 48 horas antes de la instalación ... y si estas temperaturas no se mantienen continuamente después de la instalación, la falla del producto no será cubierta por el garantía.

El “uso o condiciones anormales” incluye, entre otros, daños por fugas de plomería / electrodomésticos, tormentas o inundaciones, daños por humo, fuego, quemaduras u otros eventos fortuitos, daños causados por negligencia o alteraciones inadecuadas del producto original fabricado. . “Abuso” es cualquier uso del piso que no sea razonable considerando los usos típicos y esperados de los productos Finzzi en un entorno comercial. Estos incluyen, pero no se limitan a, grietas, deformaciones, suciedad, decoloración, abolladuras y pinchazos causados por artículos como patines, zapatos de golf o mascotas. Los pies de los muebles siempre deben estar cubiertos con material protector adecuado. Las sillas, sofás u otros muebles con ruedas deben estar equipados con ruedas de goma blandas y tener una estera protectora adecuada o copas de ruedas protectoras.

· La garantía excluye daños causados por el agua en muebles, accesorios, paredes, subsuelos, molduras, molduras, contrapisos, elementos de calefacción radiante o cualquier cosa que no esté relacionada con el piso Finzzi. Cualquier daño resultante del crecimiento de moho y hongos no está cubierto por la garantía.
· Cualquier mancha resultante de orina, heces o vómitos de otra cosa que no sea una mascota doméstica no está cubierta por esta garantía.
· Esta garantía excluye el daño causado por la presión hidrostática (acumulación de agua o humedad debajo del piso que se transmite a la superficie a través de la presión ejercida) u otras condiciones que resultan en agua debajo del piso
· No cubiertos por esta garantía son condiciones causadas por un uso o mantenimiento incorrecto, tales como:
1- Disminución de brillo o aumento de la opacidad debido a la falta de mantenimiento o mantenimiento incorrecto.
2- Daño debido a cinta adhesiva, rasguños, abolladuras y cortes.
3- Daños o decoloración por uso de tintes de alfombras, fertilizantes u otros productos químicos.
4- Manchado por el uso de esteras/tapetes no etiquetadas como no manchado.
5- Daños causados por quemaduras, inundaciones, incendios y otros accidentes.
6- Daño causado por el abuso (es decir, arrastrar objetos pesados o afilados por el piso sin protección
7- Daños causados por ruedas giratorias o barras batidoras de aspiradora.
8- No soportar muebles con protectores de piso hechos de fieltro no manchado o plástico duro no pigmentado. Los protectores deben tener el mismo diámetro que el objeto y descansar en el piso.
9- Daño a las mascotas, como masticar, cavar, arañar, etc.
· La decoloración por calor o luz solar no está cubierta por la garantía.
· Las variaciones de color, tono o textura del producto comprado de las que se muestran en muestras, fotografías o literatura no están cubiertas por esta garantía.
· Cualquier responsabilidad por pérdida de ganancias o cualquier otro daño indirecto, especial o consecuente está excluida de la garantía.
· El fabricante no puede garantizar que el producto Finzzi seleccionado coincida o se coordine con los muebles, adornos, gabinetes, barandas, etc.

Todos los reclamos deben presentarse ante el vendedor minorista o distribuidor y deben acompañarse de un comprobante de compra junto con un comprobante de instalación y mantenimiento adecuados del producto. Los siguientes remedios están disponibles para usted si el piso no funciona de acuerdo con la garantía:

1- Durante el primer año posterior a la instalación, Scelavi a su opción (i) reparará el piso para cumplir con la garantía o (ii) reemplazará sin cargo el área afectada con otro piso de igual valor y calidad. Si el piso fue instalado profesionalmente por un contratista de pisos originalmente, Scelavi también pagará costos laborales razonables.
2- Durante el segundo y tercer año, Scelavi, a su opción (i) reparará el piso para cumplir con la garantía o (ii) proporcionará una nota de crédito por el precio de compra original del piso, Finzzi también pagará el 50% de cargos laborales razonables..
3- Durante el cuarto décimo año, Scelavi, a su opción (i) reparará el piso para cumplir con la garantía o (ii) proporcionará una nota de crédito por el 50% del precio de compra original del piso. No se pagarán cargos laborales.

GARANTÍAS:

GARANTÍA COMERCIAL DE 6 AÑOS 0,3MM CAPA DE DESGASTE

La capa de vinilo del producto Finzzi está garantizada por Scelavi para que no se desgaste bajo un uso comercial normal y razonable de ligero a medio por un período de 6 años a partir de la fecha de compra. Desgaste significa la pérdida total de la capa de desgaste, de modo que el diseño impreso cambie en un mínimo del 3% de la instalación total.

Esta garantía comercial cubre solo aquellos productos que se consideran aceptables en instalaciones comerciales ligeras y medianas como las siguientes:

· Hoteles: habitaciones, salas de conferencias / reuniones, áreas de lobby (se requieren alfombras de entrada).
· Institucional: aulas, salas de formación, salas de reuniones, zonas comunes, salas residenciales, pasillos.
· Consultorios médicos: salas de espera, salas de pacientes, salas de examen, salas de almacenamiento, pasillos, entradas (se requieren alfombras de entrada).
· Oficinas y restaurantes: oficinas, salas de conferencias / reuniones, salas de exposición, piso de restaurante, salas de descanso.
· Venta minorista: : tiendas de novedades / boutiques, áreas de exhibición de productos, pisos de ventas, salas de exhibición, peluquerías, pasillos, Entradas (se requieren alfombras de entrada).

La garantía comercial limitada de seis años está sujeta a las siguientes condiciones:

· La capa de desgaste de vinilo tiene un espesor mínimo de 0,3mm
· El piso debe instalarse correctamente y siguiendo las pautas de instalación de Scelavi.
· El piso debe usarse solo en interiores en un área con clima controlado.
· El piso debe mantenerse de acuerdo con las pautas de mantenimiento de Scelavi.
· El piso debe revisarse cuidadosamente para detectar defectos antes y durante la instalación con suficiente iluminación.

Una vez instalado, el piso se considerará no defectuoso. Los productos con defectos visibles no deben instalarse bajo ninguna circunstancia.

La garantía comercial limitada de seis años está sujeta a las siguientes exclusiones:

· La garantía no es transferible y se aplica solo al comprador original.
· Solo productos de primera calidad. 2nds o "off-goods" no aplican. Las juntas abiertas de 0,2mm o menos no se consideran un defecto bajo garantía. Las juntas defectuosas por una instalación inadecuada, la falta de control de la temperatura continua, u obstrucciones que crean "puntas levantadas" no están expresamente cubiertas por esta garantía.
· Las condiciones o defectos causados por el uso de adhesivos inadecuados, el subsuelo inadecuado, o la preparación inadecuada del subsuelo, no están cubiertos por la garantía.
· Los pisos Finzzi que hayan estado sujetos a condiciones o usos anormales, o sujetos a abuso de cualquier forma no estarán cubiertos. Si los productos Finzzi no se aclimatan adecuadamente según las instrucciones de instalación, el defecto resultante del producto no estará cubierta por la garantía.

El "uso o condiciones anormales" incluye, entre otros, daños por fugas de plomería / electrodomésticos, tormentas o inundaciones, daños por humo, fuego, quemaduras u otros eventos fortuitos, daños causados por negligencia o alteraciones inadecuadas del producto original fabricado. . "Abuso" es cualquier uso del piso que no sea razonable considerando el típico uso esperado de los productos Finzzi en un entorno comercial. Estos incluyen, pero no se limitan a, grietas, deformaciones, suciedad, decoloración, abolladuras y pinchazos causados por artículos como patines, zapatos de golf o mascotas. Las patas de los muebles siempre deben estar cubiertos con material protector adecuado. Las sillas, sofás u otros muebles con ruedas deben estar equipados con ruedas de goma blandas y tener un tapete protector de hule transparente adecuado o cubiertas de ruedas protectoras.

· La garantía excluye daños causados por el agua a muebles, accesorios, paredes, subsuelos, molduras, juntas, contrapisos, elementos de calefacción radiante o cualquier cosa no relacionada con el piso Finzzi. Cualquier daño resultante del crecimiento de moho y hongos no está cubierto por la garantía.
· Cualquier mancha resultante de orina, heces o vómitos de otra cosa que no sea una mascota doméstica no está cubierta por esta garantía.
· Esta garantía excluye el daño causado por la presión hidrostática (agua o humedad debajo del piso que se transmite a la superficie a través de la presión ejercida) u otras condiciones que resultan en agua debajo del piso.
· No cubiertos por esta garantía son condiciones causadas por un uso o mantenimiento incorrecto, tales como:
  – La reducción del brillo, la opacidad o los rasguños de la superficie no se consideran desgaste de la superficie.
  – Daños debidos a cinta adhesiva, rozaduras, rasguños, abolladuras y cortes
  – Daños o decoloración de tintes de alfombras, fertilizantes u otros productos químicos.
  – Manchas por el uso de alfombras no etiquetadas como antimanchas.
  – Daños causados por quemaduras, inundaciones, incendios y otros accidentes.
  – Daños causados por abuso (es decir, arrastrar objetos pesados o afilados por el piso sin la protección adecuada).
  – Daños causados por ruedas giratorias o plásticos duros de las aspiradora no cubiertos adecuadamente.
  – No soportar los muebles con protectores de suelo hechos de fieltro anti-manchas o plástico duro no pigmentado. Los protectores deben tener el mismo diámetro que el objeto y descansar en el suelo.
  – Daños de las mascotas, como masticar, cavar, arañar, etc..
· La decoloración por calor o luz solar no está cubierta por la garantía.
· Las variaciones de color, tono o textura del producto comprado, respecto a las muestras, fotografías o literatura, no están cubiertas por esta garantía.
· Cualquier responsabilidad por pérdida de ganancias o cualquier otro daño indirecto, especial o consecuente está excluida de la garantía.

El fabricante no puede garantizar que el producto Finzzi seleccionado coincida o se coordine con los muebles, adornos, gabinetes, barandas, etc.

Todos los reclamos deben presentarse ante el vendedor minorista o distribuidor y deben acompañarse de un comprobante de compra junto con un comprobante de instalación y mantenimiento adecuados del producto. Las siguientes soluciones están disponibles si el piso no funciona de acuerdo con la garantía:

· Durante el primer año después de la instalación, Scelavi, a su opción (i) reparará el piso para cumplir con la garantía o (ii) reemplazará sin cargo el área afectada con otro piso de igual valor y calidad. Si el piso fue instalado profesionalmente por un contratista especializado, Scelavi también pagará los costos laborales razonables.
· Durante el segundo y tercer año, Scelavi, a su opción (i) reparará el piso para cumplir con la garantía o (ii) proporcionará una nota de crédito por el precio de compra original del piso, Finzzi también pagará el 50% de Cargos laborales razonables.
· Durante el cuarto - sexto año, Scelavi, a su opción (i) reparará el piso para cumplir con la garantía o (ii) proporcionará una nota de crédito por el 50% del precio de compra original del piso. No se pagarán cargos laborales.

Edited: May 2022

SCELAVI

www.scelavi.com